FRIGIDAIRE

Dryer FARE4044MW



Signature Features

DrySense™ Technology

Dries your clothes more precisely, reducing wrinkles.

Fits-More™ Dryer

Dry more in one load with our large, 7.0 cu.ft. interior.

Quick Dry

Dries even extra-large loads quickly and efficiently.

Energy Saver Option

Reduces energy use up to 20%.1

14 Dry Cycles 7.0 Cu. Ft. D.O.E. Electric

Product Dimensions

Height	43"
Width	27"
Depth	29"

More Easy To Use Features

One-Touch™ Wrinkle Release

This option features Wrinkle Release Technology that finishes by tumbling without heat, preventing wrinkles, so your clothes look great every time.

Multiple Settings

Features cycles to meet all of your drying needs from Wrinkle Release and Shrink Guard to Line Dry and an Energy Saver Option that saves even more energy.

Specialty Cycles

Features cycles especially for Jeans or Kid's Wear.

TimeWise® Technology

TimeWise® Technology ensures wash time equals dry time — so you don't wait for clothes to dry.

NSF® Certified

No-Wash Sanitize Cycle

A convenient option to quickly sanitize or refresh items without washing. Perfect for delicate items or children's plush toys.

Allergen Cycle

Uses high heat to reduce allergens in clothes.

Express-Select® Controls

Easily select options and cycles with the touch of a button.

Line Dry Option

Dries clothes without heat to save up to 50% in energy versus a normal cycle.

SilentDesign™

Designed for quiet operation.

NSF® International Certification



Available in:



¹Based on a common 8 lb. AHAM load as compared to not using Energy Saver Option for the same model.

frigidaire.com


Dryer



FRIGIDAIRE.

Total Capacity D.O.E. (Cu.Ft.) Controls Express-Select* Dryer Drum Interior Interior Light Yes Framed Glass Window Door Pes DrySense™ Technology Wrinkle Release Technology Yes Wrinkle Release Technology Moisture Sensor Estimated Time Remaining Cycle Signal Cycle Signal Chime Cycle Signal "On/Off" Yes Start/Pause/Cancel Knobs Delay Start Up to 12 Hours Tumble Speed (RPM) Reversible Door Lint Screen Sound Package Adjustable Leveling Legs Adjustable Leveling Legs Cycles Dry Cycles Dry Cycles Dryness Level Selections Temperature Selections Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit PN# 137067300 Certifications NSF* Certified Yes Sund Package Rating Advov/60Hz/30A Connected Load (kW Rating) @ 240 Volts 5.4	Features	
Controls Express-Select* Dryer Drum Interior Stainless Steel Interior Light Yes Framed Glass Window Door Yes DrySense™ Technology Yes Wrinkle Release Technology Yes Moisture Sensor Yes Estimated Time Remaining Yes Cycle Status Lights Yes Cycle Signal Chime Cycle Signal "On/Off" Yes Control Lock Yes Start / Pause/ Cancel Knobs Yes Delay Start Up to 12 Hours Tumble Speed (RPM) 50 Reversible Door Yes Lint Screen Yes Sound Package SilentDesign™ Adjustable Leveling Legs 4 Cycles 14 Specialty Cycles 2 Options 5 Temperature Selections 5 Timed Dry 60, 75, 90 Energy Saver Option Yes Optional Accessories Mobile Home Installation Kit PN# 137067300 Certifications Yes Specificatio	Total Capacity D.O.E. (Cu. Ft.)	7.0
Dryer Drum Interior Interior Light Framed Glass Window Door Pyes DrySense™ Technology Wrinkle Release Technology Wrinkle Release Technology Moisture Sensor Estimated Time Remaining Cycle Status Lights Cycle Signal Chime Cycle Signal "On/Off" Yes Control Lock Start / Pause / Cancel Knobs Delay Start Up to 12 Hours Tumble Speed (RPM) Reversible Door Lint Screen Sound Package Adjustable Leveling Legs Cycles Dry Cycles Dry Cycles Dryness Level Selections Temperature Selections Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit PN # 137067200 Drying Rack Certifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Rear Voltage Rating Zes Ves Ves Stainless Steel Yes Stainless Steel Yes Stainless Yes Stainless Yes SilentDesign Yes SilentDesign™ Ad 14 Ad 2 Ad 2 Ad 2 Ad 3 Ad		Express-Select*
Framed Glass Window Door DrySense™ Technology Wrinkle Release Technology Yes Winkle Release Technology Yes Moisture Sensor Estimated Time Remaining Cycle Status Lights Cycle Signal Chime Cycle Signal Chime Cycle Signal Control Lock Yes Start/Pause/Cancel Knobs Delay Start Tumble Speed (RPM) Reversible Door Lint Screen Sound Package Adjustable Leveling Legs Cycles Dry Cycles Dry Cycles Dryncycles Dryncyscles Mobile Home Installation Kit PN# 137067200 Drying Rack PN# 137067300 Certifications NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Voltage Rating Yes	Dryer Drum Interior	
DrySense™ Technology Wrinkle Release Technology Wrinkle Release Technology Yes TimeWise* Technology Moisture Sensor Estimated Time Remaining Cycle Status Lights Cycle Signal Chime Cycle Signal Chime Cycle Signal "On/Off" Yes Control Lock Yes Start/Pause/Cancel Knobs Delay Start Up to 12 Hours Tumble Speed (RPM) So Reversible Door Lint Screen Sound Package Adjustable Leveling Legs Adjustable Leveling Legs Cycles Dry Cycles Dry Cycles Dryness Level Selections Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit PN# 137067300 Certifications NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Rear Voltage Rating Yes	Interior Light	Yes
Wrinkle Release Technology TimeWise* Technology Yes Moisture Sensor Estimated Time Remaining Cycle Status Lights Cycle Signal Chime Sound Poly Cycle Signal Chime Sound Poly Cycle Signal Chime Signal Chime Sound Sound Sound Sound Sound Signal S	Framed Glass Window Door	Yes
TimeWise* Technology Moisture Sensor Estimated Time Remaining Cycle Status Lights Cycle Signal Chime Cycle Sugnal	DrySense™ Technology	Yes
Moisture Sensor Estimated Time Remaining Cycle Status Lights Cycle Signal Chime Cycle Substit Cycle	Wrinkle Release Technology	Yes
Estimated Time Remaining Cycle Status Lights Cycle Signal Chime Cycle Signal Chime Cycle Signal "On/Off" Yes Control Lock Start / Pause / Cancel Knobs Delay Start Tumble Speed (RPM) Reversible Door Lint Screen Yes Sound Package Adjustable Leveling Legs Cycles Dry Cycles Dry Cycles Dry Cycles Dryness Level Selections Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit PN # 137067300 Certifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Ves Chime Ch	TimeWise* Technology	Yes
Cycle Status Lights Cycle Signal Chime Cycle Signal Chime Cycle Signal "On/Off" Yes Control Lock Start / Pause / Cancel Knobs Delay Start Tumble Speed (RPM) Reversible Door Lint Screen Yes Sound Package Adjustable Leveling Legs Adjustable Leveling Legs Cycles Dry Cycles Dry Cycles 2 Options Temperature Selections Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit PN # 137067300 Certifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Ves Control Lock Yes Yes SilentDesign™ 4 Cycles 14 Specialty Cycles 2 Options 5 Coptions Fined Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit PN # 137067300 Certifications NSF* Certified Yes Specifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Voltage Rating	Moisture Sensor	Yes
Cycle Signal Chime Cycle Signal "On/Off" Yes Control Lock Yes Start / Pause / Cancel Knobs Yes Delay Start Up to 12 Hours Tumble Speed (RPM) 50 Reversible Door Yes Lint Screen Yes Sound Package SilentDesign™ Adjustable Leveling Legs 4 Cycles Dry Cycles 14 Specialty Cycles 2 Options Temperature Selections 5 Dryness Level Selections 5 Timed Dry 60, 75, 90 Energy Saver Option Yes Optional Accessories Mobile Home Installation Kit PN # 137067300 Certifications NSF* Certified Yes Specifications Maximum Exhaust Duct Length¹ (Ft.) 64 Power Supply Connection Location Rear Voltage Rating 240V/60Hz/30A	Estimated Time Remaining	Yes
Cycle Signal "On/Off" Control Lock Start / Pause / Cancel Knobs Delay Start Tumble Speed (RPM) Reversible Door Lint Screen Sound Package Adjustable Leveling Legs Cycles Dry Cycles Dry Cycles 2 Options Temperature Selections Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit PN # 137067300 Certifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Ves Yes Yes SilentDesign™ 4 Cycles 14 2 Cycles 14 5 64 Power Supply Connection Location Yes Yes Yes Yes Yes Yes Adjustable Leveling Legs 4 Cycles 5 Cycles 5 Cycles 5 Cycles 6 Cycles 5 Cycles 5 Cycles 5 Cycles 6 Cycles 5 Cycles 6 Cycles 5 Cycles 5 Cycles 5 Cycles 5 Cycles 5 Cycles 5 Cycles Cycl	Cycle Status Lights	Yes
Control Lock Start / Pause / Cancel Knobs Delay Start Tumble Speed (RPM) Reversible Door Lint Screen Sound Package Adjustable Leveling Legs Adjustable Leveling Legs Dry Cycles Dry Cycles Dry Cycles 2 Options Temperature Selections Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit PN # 137067300 Certifications NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Yes Ves Ves Yes Yes Yes Adjustable Leveling Legs 4 Cycles 14 2 2 Cycles 14 5 6 6 7 6 7 7 8 8 7 8 8 8 8 9 9 9 9 9 9 9 9 9	Cycle Signal	Chime
Start / Pause / Cancel Knobs Delay Start Tumble Speed (RPM) Reversible Door Lint Screen Sound Package Adjustable Leveling Legs Adjustable Leveling Legs Pry Cycles Dry Cycles 2 Options Temperature Selections Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit PN# 137067300 Certifications Maximum Exhaust Duct Length¹ (Ft.) Pougling Pack Pues Dury 12 Hours Pues Pues Pack Power Supply Connection Location Pougli 12 Hours Pues Pougli 12 Hours Pues	Cycle Signal "On/Off"	Yes
Delay Start Tumble Speed (RPM) Reversible Door Lint Screen Sound Package Adjustable Leveling Legs Adjustable Leveling Legs Dry Cycles Dry Cycles Dry Cycles 2 Options Temperature Selections Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit Drying Rack PN# 137067300 Certifications NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Yes 10 Yes SilentDesign™ 4 Cycles 14 2 Cycles 14 5 6 6 7 6 7 7 8 8 7 8 8 8 8 9 9 9 14 15 16 16 16 16 17 18 18 18 18 18 18 18 18 18	Control Lock	Yes
Tumble Speed (RPM) 50 Reversible Door Yes Lint Screen Yes Sound Package SilentDesign™ Adjustable Leveling Legs 4 Cycles Dry Cycles 14 Specialty Cycles 2 Options Temperature Selections 5 Dryness Level Selections 5 Timed Dry 60, 75, 90 Energy Saver Option Yes Optional Accessories Mobile Home Installation Kit PN# 137067200 Drying Rack PN# 137067300 Certifications NSF* Certified Yes Specifications Maximum Exhaust Duct Length¹ (Ft.) 64 Power Supply Connection Location Rear Voltage Rating 240V/60Hz/30A	Start/Pause/Cancel Knobs	Yes
Reversible Door Lint Screen Sound Package Adjustable Leveling Legs Adjustable Leveling Legs Adjustable Leveling Legs Cycles Dry Cycles 14 Specialty Cycles 2 Options Temperature Selections 5 Dryness Level Selections 5 Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit PN# 137067200 Drying Rack PN# 137067300 Certifications NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Voltage Rating Yes SilentDesign™ 4 4 A Ves Specifications Yes Yes Finance Yes Yes Yes Yes Yes Yes Yes Y	Delay Start	Up to 12 Hours
Lint Screen Sound Package Adjustable Leveling Legs Adjustable Leveling Legs Cycles Dry Cycles Dry Cycles 14 Specialty Cycles 2 Options Temperature Selections 5 Dryness Level Selections 5 Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit PN# 137067200 Drying Rack PN# 137067300 Certifications NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Voltage Rating	Tumble Speed (RPM)	50
Sound Package Adjustable Leveling Legs 4 Cycles Dry Cycles 14 Specialty Cycles 2 Options Temperature Selections 5 Dryness Level Selections 5 Timed Dry 60, 75, 90 Energy Saver Option Optional Accessories Mobile Home Installation Kit PN# 137067200 Drying Rack PN# 137067300 Certifications NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Voltage Rating	Reversible Door	Yes
Adjustable Leveling Legs 4 Cycles 14 Dry Cycles 2 Options 5 Temperature Selections 5 Dryness Level Selections 5 Timed Dry 60, 75, 90 Energy Saver Option Yes Optional Accessories Mobile Home Installation Kit PN # 137067200 Drying Rack PN# 137067300 Certifications Yes Specifications Yes Maximum Exhaust Duct Length¹ (Ft.) 64 Power Supply Connection Location Rear Voltage Rating 240V/60Hz/30A	Lint Screen	Yes
Cycles 14 Dry Cycles 2 Options 2 Temperature Selections 5 Dryness Level Selections 5 Timed Dry 60, 75, 90 Energy Saver Option Yes Optional Accessories Mobile Home Installation Kit PN # 137067200 Drying Rack PN # 137067300 Certifications Yes Specifications Yes Maximum Exhaust Duct Length¹ (Ft.) 64 Power Supply Connection Location Rear Voltage Rating 240V/60Hz/30A	Sound Package	SilentDesign™
Dry Cycles 14 Specialty Cycles 2 Options 5 Temperature Selections 5 Dryness Level Selections 5 Timed Dry 60, 75, 90 Energy Saver Option Yes Optional Accessories Mobile Home Installation Kit PN# 137067200 Drying Rack PN# 137067300 Certifications Yes NSF* Certified Yes Specifications Maximum Exhaust Duct Length¹ (Ft.) 64 Power Supply Connection Location Rear Voltage Rating 240V/60Hz/30A	Adjustable Leveling Legs	4
Specialty Cycles 2 Options 5 Temperature Selections 5 Dryness Level Selections 5 Timed Dry 60, 75, 90 Energy Saver Option Yes Optional Accessories Nobile Home Installation Kit PN# 137067200 Drying Rack PN# 137067300 Certifications Yes Specifications Yes Maximum Exhaust Duct Length¹ (Ft.) 64 Power Supply Connection Location Rear Voltage Rating 240V/60Hz/30A	Cycles	
Options Temperature Selections Dryness Level Selections Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit Drying Rack PN# 137067200 Drying Rack PN# 137067300 Certifications NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Voltage Rating Specifications 240V/60Hz/30A	Dry Cycles	14
Temperature Selections Dryness Level Selections Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit PN# 137067200 Drying Rack PN# 137067300 Certifications NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Voltage Rating Specifications 5 5 Certifications For Certified Yes For Certifications Maximum Exhaust Duct Length¹ (Ft.) Fower Supply Connection Location Voltage Rating Accessories 5 Certifications Rear Voltage Rating	Specialty Cycles	2
Dryness Level Selections Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit PN# 137067200 Drying Rack PN# 137067300 Certifications NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Voltage Rating 5 Heaver Supply Connection Location Feed Specifications 5 Heaver Supply Connection Location Feed Specifications 5 Heaver Supply Connection Location Feed Specification Fe	Options	
Timed Dry 60, 75, 90 Energy Saver Option Yes Optional Accessories Mobile Home Installation Kit PN# 137067200 Drying Rack PN# 137067300 Certifications NSF* Certified Yes Specifications Maximum Exhaust Duct Length¹ (Ft.) 64 Power Supply Connection Location Rear Voltage Rating 240V/60Hz/30A	Temperature Selections	5
Energy Saver Option Yes Optional Accessories Mobile Home Installation Kit PN# 137067200 Drying Rack PN# 137067300 Certifications NSF* Certified Yes Specifications Maximum Exhaust Duct Length¹ (Ft.) 64 Power Supply Connection Location Rear Voltage Rating 240V/60Hz/30A	Dryness Level Selections	5
Optional Accessories Mobile Home Installation Kit PN# 137067200 Drying Rack PN# 137067300 Certifications NSF* Certified Yes Specifications Maximum Exhaust Duct Length¹ (Ft.) 64 Power Supply Connection Location Rear Voltage Rating 240V/60Hz/30A	Timed Dry	60, 75, 90
Mobile Home Installation Kit PN# 137067200 Drying Rack PN# 137067300 Certifications NSF* Certified Yes Specifications Maximum Exhaust Duct Length¹ (Ft.) 64 Power Supply Connection Location Rear Voltage Rating 240V/60Hz/30A	Energy Saver Option	Yes
Drying Rack Certifications NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Voltage Rating PN# 137067300 64 Fear 440V/60Hz/30A	Optional Accessories	
Certifications NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Voltage Rating 240V/60Hz/30A	Mobile Home Installation Kit	PN# 137067200
NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Voltage Rating Yes 64 Parallel Supply Connection Location Rear 240V/60Hz/30A	Drying Rack	PN# 137067300
Specifications Maximum Exhaust Duct Length¹ (Ft.) 64 Power Supply Connection Location Rear Voltage Rating 240V/60Hz/30A	Certifications	
Maximum Exhaust Duct Length¹ (Ft.) 64 Power Supply Connection Location Rear Voltage Rating 240V/60Hz/30A	NSF® Certified	Yes
Power Supply Connection Location Rear Voltage Rating 240V/60Hz/30A	Specifications	
Voltage Rating 240V/60Hz/30A	Maximum Exhaust Duct Length ¹ (Ft.)	64
	Power Supply Connection Location	Rear
Connected Load (kW Rating) @ 240 Volts 5.4	Voltage Rating	240V/60Hz/30A
3, 0 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -	Connected Load (kW Rating) @ 240 Volts	5.4
Amps @ 240 Volts 24	Amps @ 240 Volts	24
Heating Element @ 240 Volts (Watts) 4,700	Heating Element @ 240 Volts (Watts)	4,700
Shipping Weight (Approx.) 143 Lbs.	Shipping Weight (Approx.)	143 Lbs.

¹Rigid metal duct preferred, semi-rigid optional and allow deductions for elbows and vents. Refer to Installation Guide on web for additional information.

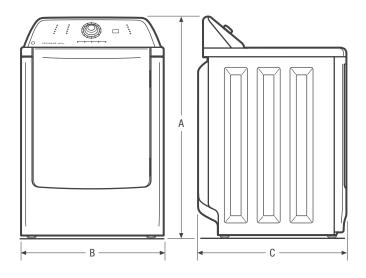


NOTE: For planning purposes only. Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.



Product Dimensions	
A-Height	43"
B-Width	27"
C-Depth	29"
Depth with Door Open 90°	50"

Accessories information available on the web at frigidaire.com

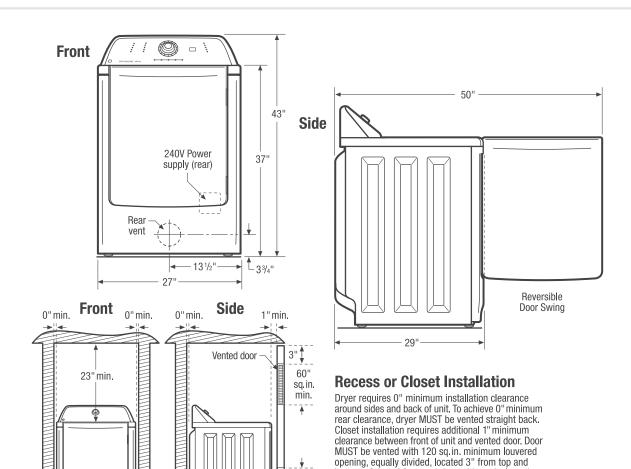

60"

sq.in.

min.

Top Load Dryer Specifications

- Product Shipping Weight (approx.) 143 Lbs.
- Designed for HOME USE only, not recommended for commercial application.
- · An electrical supply with grounded three-prong receptacle is required.
- · Voltage Rating 240V/60 Hz/30 Amps
- Single phase 3- or 4-wire cable, 240 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line. (Do not use same circuit as washer.)
- Connected Load (kW Rating) @ 240 Volts = 5.4kW
- Amps @ 240 Volts = 24 Amps
- Dryer MUST employ a 3-conductor NEMA 10-30 type SRDT or 4-conductor NEMA 14-30 type SRDT or ST (as required), rated at 240 volt AC minimum, 30 amp power supply cord marked for use with clothes dryers (not supplied).
- Grounding through neutral link prohibited in specific applications and certain locales, requiring use of 4-wire system. (For detailed electrical requirements, refer to Product Installation Guide on web.)
- · Always consult local and national electric codes
- Dryer can be installed in recess or closet requiring 0" minimum installation clearance around sides and back of unit. To achieve 0" minimum rear clearance, dryer MUST be vented straight back. Closet installation requires additional 1" minimum clearance between front of unit and vented door. Door MUST be vented with 120 sq.in. minimum louvered opening, equally divided, located 3" from top and bottom of door. A louvered door with equivalent air openings for full-length of door is acceptable. Air openings MUST remain unobstructed with door installed. (For additional installation details, refer to Product Installation Guide on web.)

- Do NOT install in area exposed to dripping water or outdoor weather conditions; where gasoline or other flammables are kept or stored; or where dryer comes in contact with curtains, drapes or anything that will obstruct flow of combustion and ventilation air.
- For garage installation, dryer MUST be located minimum 18" above floor.
- Floor MUST be solid with 1" maximum slope. Do NOT install on carpeted surface.

bottom of door. A louvered door with equivalent air

Air openings MUST remain unobstructed with door

installed. For additional installation details, refer to

openings for full-length of door is acceptable.

Product Installation Guide on web.

- Dryer MUST exhaust to outside of building, NOT into any concealed space.
- Exhaust installation requires minimum 4"-diameter rigid or semi-rigid metal duct with approved, unobstructed vent hood having swing-out damper(s). If installing rigid metal duct (preferred), do not exceed MAXIMUM venting run length of 64 ft., allow deductions for elbows and vents. If installing semi-rigid metal duct, do not exceed MAXIMUM venting run length of 8 ft., always allow deductions for elbows and vents (Refer to Product Installation Guide on web for additional information). Do NOT use flexible plastic or metal foil duct and use shortest run possible.
- Leveling legs supplied to level dryer properly and reduce excessive noise and vibration.
- For manufactured or mobile home installation optional Mobile Home Installation Kit (PN# 137067200) required. (For specific installation details, refer to Product Installation Guide on web.)

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.

Optional Accessories

- Mobile Home Installation Kit (PN# 137067200).
- Drying Rack (PN# 137067300).

