



SPECIFICATIONS

MODEL	E661	E661LS
VOLTS	120 VAC	120 VAC
HZ	60	60
AMPS	2.4	2.4
CFM (BOOST)	550	280
CFM (LOW SPEED)	120	110
SONES (BOOST)	8.5	8.5
SONES (LOW SPEED)	<0.3	1.10
DUCTING SIZE	3¼" x 10"	3¼" x 10"
2 LED MODULES	120 V, 5.5 W	120 V, 5.5 W
WARRANTY	1 YEAR	1 YEAR


DIMENSIONS

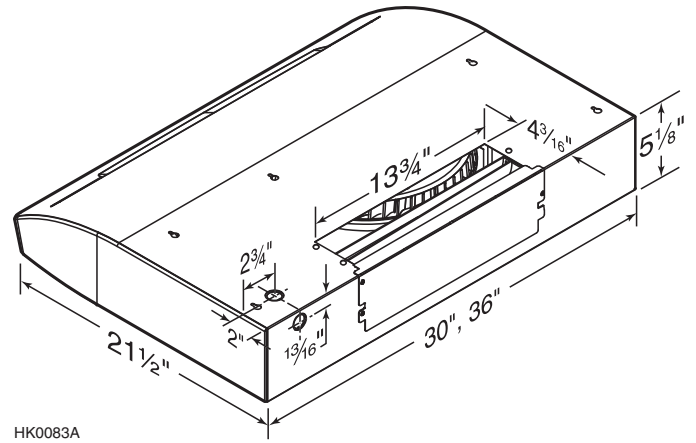

AIR FLOW PERFORMANCE

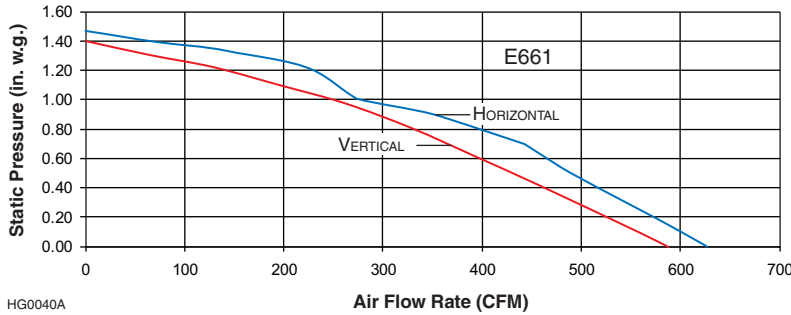

HG0040A

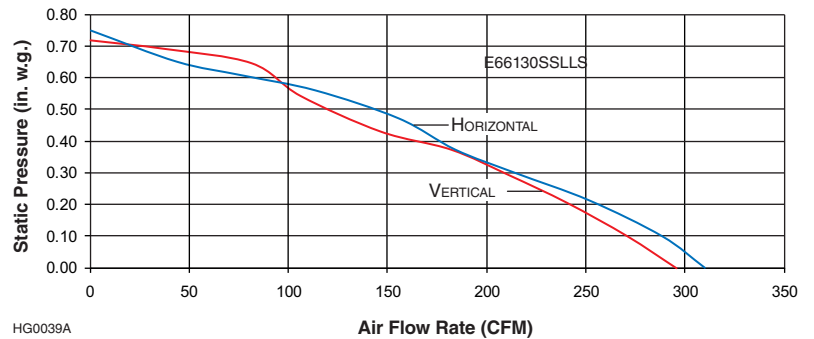

HG0039A




HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.




BROAN-NUtONE CANADA ULC, MISSISSAUGA, ONTARIO WWW.BROAN.CA 1-888-882-7626

PROJECT	REMARKS
LOCATION	
MODEL No.	
QTY.	
SUBMITTED BY	
DATE	


MODEL 634 OR 644
(ROOF CAP)



MODEL 647
(7" ROUND WALL CAP)



3 1/4" x 10"
RECTANGULAR
STANDARD DUCT




MODEL 415
7" ROUND
ADJUSTABLE ELBOW
(OPTIONAL)




MODEL 407
7" ROUND
STANDARD DUCT



MODEL 412
TRANSITION
(3 1/4" x 10" TO 7" ROUND)



MODEL T461
ADAPTER/DAMPER
3 1/4" x 14" TO 3 1/4" x 10"
(INCLUDED WITH HOOD)

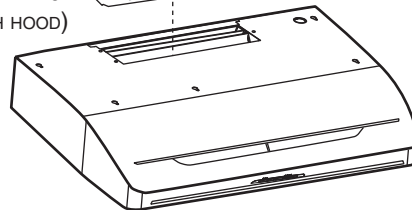

HL0113

BROAN ELITE
RANGE HOOD
MODEL E661