

Dishwasher

EIDW6405HT

Featuring IQ-Touch™ Electronic Controls



Energy Star® qualified means at least 41% less energy is used.¹




Fully Integrated Controls

Features fully integrated IQ-Touch™ controls. Includes 5 wash cycles and 3 dishcare options to make it a most versatile dishwasher.



Luxury-Quiet™ Dishwasher²

So quiet you can run it whenever you want and no one will notice. Tested to 45 dBA sound level.



Sure-2-Fit® Racking System

The most versatile dishware racking system – there's a perfect place for over 180 items, from chopsticks to stockpots to stemware. There's also an adjustable/removable top rack for the utmost flexibility.



Largest Usable Capacity

Largest usable capacity³ in its class so all of your dinner party dishware fits.

24" BUILT-IN PANEL-READY DISHWASHER

| | |
|---|--------------------|
| ENERGY STAR® | Yes |
| Features | |
| Stainless Steel Interior | Yes |
| Signature Soft-Arc Door and Handle Design | Yes |
| Luxury-Hold™ Door | Yes |
| IQ-Touch™ Electronic Controls | Yes |
| Fully Integrated Control Panel | Yes |
| Tall Tub Design | Yes |
| Smart Soil™ Sensor | Yes |
| Luxury-Quiet™ Sound Package | Yes |
| Wash Levels | 5 |
| AquaLux™ Wash System | Yes |
| Luxury-Dry™ Power Dry System | Yes |
| Adjustable Rinse Aid Dispenser with Indicator | Yes |
| Cycles | |
| Auto Wash | Yes |
| Heavy | Yes |
| Normal | Yes |
| Eco Wash | Yes |
| Perfect Stemware™ | Yes |
| Options | |
| Air Dry | Yes |
| NSF® Certified Sanitize Option | Yes |
| Delay Start (Hours) | 1–24 |
| Rack System | |
| Sure-2-Fit® Nylon Rack System | Yes |
| Luxury-Glide® Nylon Upper Rack – | |
| Adjustable Height | Yes |
| Cup Shelf/Stemware Holder | 2/Yes |
| Cup Clips | 4 |
| Perfect Stemware™ Holder | Yes |
| Fold-Down Tines | 4 Rows |
| Rack Handle | Yes |
| Versa-Tray™ | Yes |
| Luxury-Glide® Nylon Lower Rack – | |
| Fold-Down Tines | 6 Rows |
| Rack Handle | Yes |
| Knife Holder | Yes |
| Utility Tray/Shelf | Yes |
| Stemware/Champagne Glass Holders | 4 |
| Silverware Basket | 3-Piece Split |
| Special Items Cover/Mesh Basket | Yes |
| UPC (0-12505-) | |
| Panel Ready (T) | 11046-7 |
| Specifications | |
| Overall Exterior Dimensions – | |
| Height (Adjustable) | 33-7/8" – 34-7/8" |
| Width | 23-3/4" |
| Depth (Not Including Custom Panel) (with 90° Door Open) | 23-7/8" 49-7/8" |
| Power Supply Location | Right Bottom Front |
| Water Inlet Location | Left Bottom Front |
| Leveling Legs | Yes |
| Water Usage (Gallons) – Normal Cycle | 4.9 – 8.5 |
| Water Pressure (PSI) | 15 – 120 |
| Voltage Rating | 120V/60Hz/15A |
| Connected Load (kW Rating) @ 120 Volts † | 1.44 |
| Amps @ 120 Volts | 9 |
| Product Weight | 93 Lbs. |
| Shipping Weight | 110 Lbs. |


†For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

NOTE: Always consult local and/or national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at www.electroluxappliances.ca. Specifications subject to change.



¹Than the federal minimum standard for energy consumption.

²Based on published MSRP and specifications. Available on selected models.

³As measured by adjusted rack space.

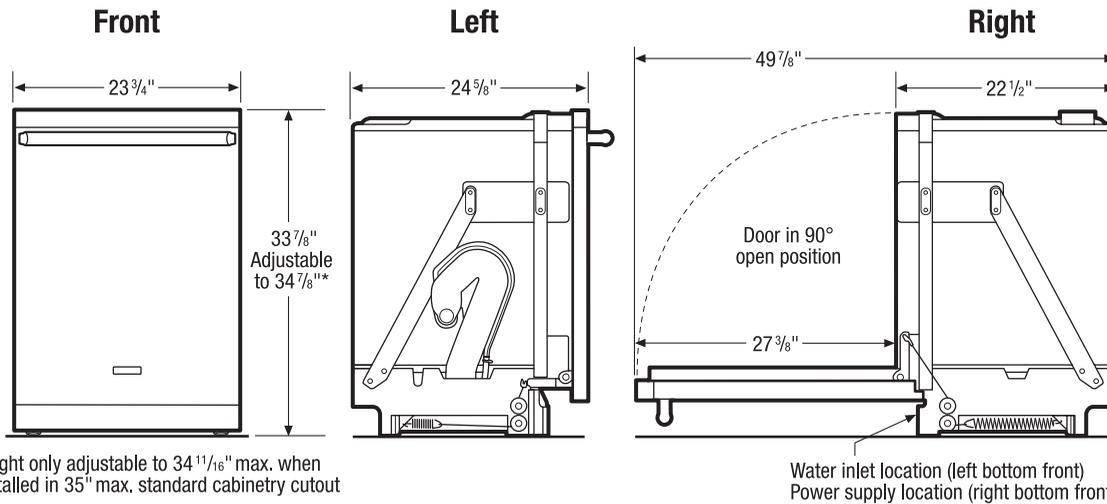

*Height only adjustable to 34 11/16" max. when installed in 35" max. standard cabinetry cutout

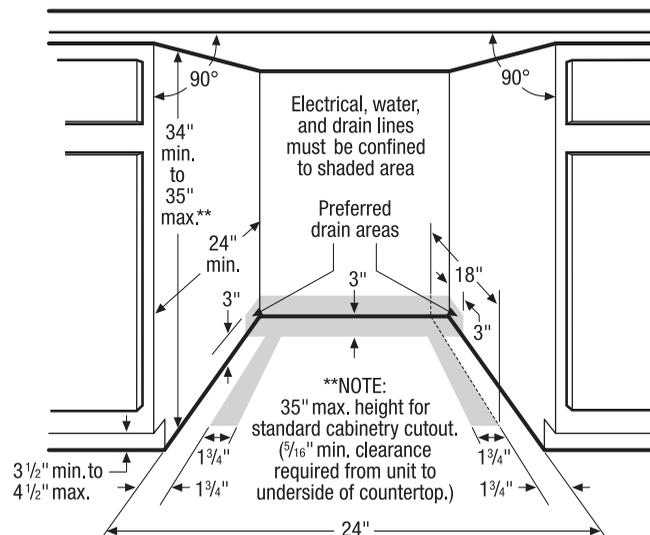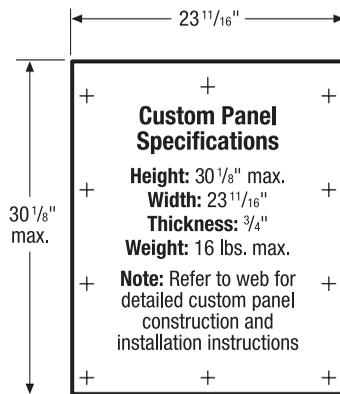

Built-In Panel-Ready Dishwasher Specifications

- Product Weight – 93 Lbs.
- Voltage Rating @120V/60 Hz/15 Amps
- Connected Load (kW Rating) @120 Volts = 1.44kW
(For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @120V = 9 Amps
- Always consult local and/or national electric & plumbing codes.
- Water Pressure – Hot water line to dishwasher must provide between 15 and 120 pounds per square inch (psi).
- Make sure location has right drain, water and electrical outlets to make connections.
- Keep back free of drain, water & electrical supply.
- Electrical and water supplies should enter cabinet opening on floor, or through back or side walls, as shown in shaded areas.
- Connections preferably located toward left side of dishwasher. Do not cross drain, water or electrical lines in front of motor, blower or frame.
- Minimum clearance of 1/4" required from unit to underside of countertop.

- Leveling legs supplied to adjust height. (Note: Height only adjustable to 34-3/4" max. when installed in 35" max. standard cabinetry cutout to allow for 1/4" min. clearance.)
- When installing in corner, allow 2" clearance between opened door and wall, to allow door to open.
- When installing at end of cabinet line, sides must be fully enclosed.
- Do not install unit under a cooktop, damage may occur.

Custom Panel Specifications

- Handle not included, match to custom cabinetry.
- Panel Dimensions – 30-1/8"H max. x 23-11/16"W x 3/4"D
- Panel Weight – 16 Lbs. max.
- Refer to web for detailed custom panel construction and installation instructions.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxappliances.ca supplied with product for detailed instructions.



NSF Protocol for Sanitization and Cleaning Performance of Household Spray-Type Dishwashers (1987)

Electrolux Major Appliances, N.A.

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • electroluxappliances.ca

EIDW6405HT 03/11

© 2011 Electrolux Major Appliances, NA

High standards of quality at Electrolux Major Appliances mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.

Printed in Canada