

# Under-Cabinet Hood

RH30WC40GS




### LCD Electronic Controls

An array of versatile options with easy-to-read blue displays, including a convenient kitchen timer, fan-speed selection and a delayed power-off option. The hoods also feature sensors that will turn them on automatically if they sense heat or smoke.



### Dual-Centrifugal Fans

Move air quietly and quickly—up to 400 cu. ft. of air per minute.



### Stainless Steel Filters

Dishwasher safe for easy cleaning.



### Halogen Lighting

For bright illumination of the cooktop surface.

## 30" UNDER-CABINET HOOD

### Features

Nominal Width	30"
Installation Type	Wall Mount
Air Discharge	Vertical or Horizontal
Air Delivery (CFM)	400
Blower Type	Dual Centrifugal
Electronic Controls with LCD Display	Yes
Fan Speeds	4
Sound Level (dBA)	68.0
Dual Halogen Lights	Yes
Dishwasher Safe Stainless Steel Filters	Yes
Exhaust Duct	Convertible*
Duct Required	7" Round or 3-1/4" x 10"

### Accessories

Charcoal Filter – PN# RHCF400GS	Optional
---------------------------------	----------

### Specifications


Product Dimensions –	
Height	4-3/4"
Width	29-7/8"
Depth	20"
Voltage Rating	120V/60Hz / 15A
Connected Load (kW Rating) @ 120 Volts <sup>‡</sup>	0.36
Amps @ 120 Volts	2.89
Shipping Weight (Approx.)	30 Lbs.
Sones Rating	6.6

\* Ventilation system is preset to recirculate air inside with no ducting. Converting to exterior exhaust is optional.

<sup>‡</sup> For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

NOTE: Always consult local and national electric codes. Check local building codes for installation requirements, as they may vary per locale. Refer to Product Installation Guide for detailed installation instructions on the web at [electroluxappliances.ca](http://electroluxappliances.ca).


Specifications subject to change.

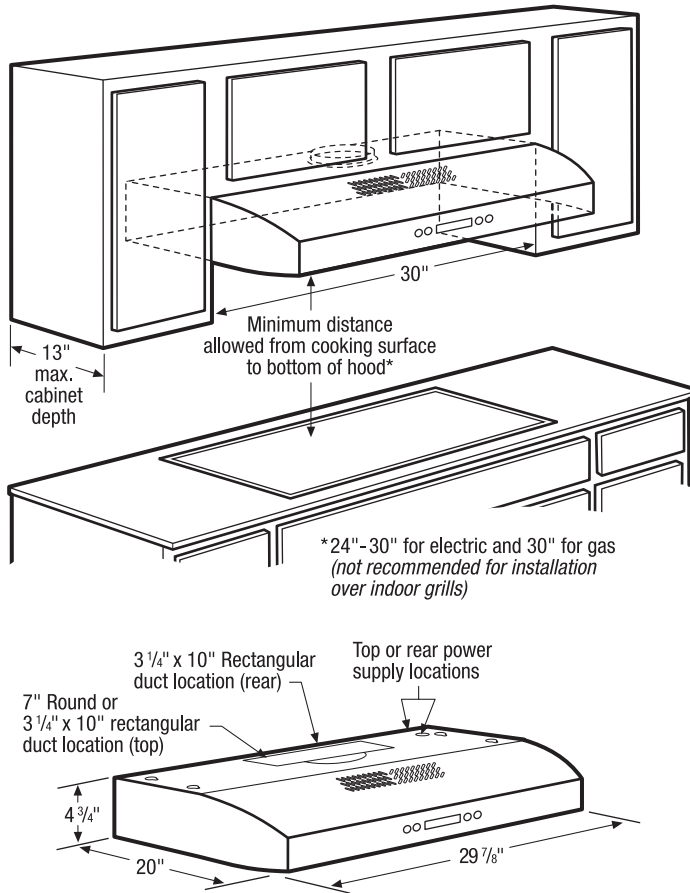


## Exhaust Options

Vent hood can be vertically or horizontally ducted outside using round or rectangular duct; or recirculated inside with no ducting required. For detailed duct preparation and installation specifications, refer to installation instructions on web.


### Outside Vertical – 7" Round Duct

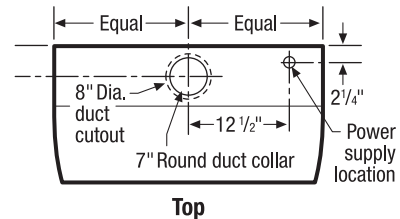

### Outside Vertical – 3 1/4" x 10" Rectangular Duct

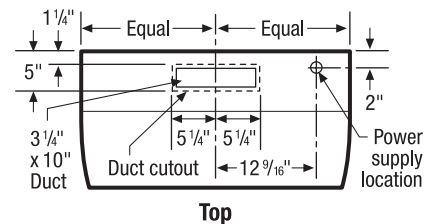

### Outside Horizontal – 3 1/4" x 10" Rectangular Duct

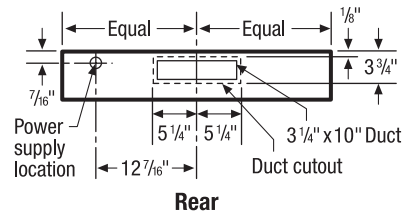

## 30" Under-Cabinet Hood Specifications

- Product Weight – 27 Lbs.
- Wall-Mount Installation – can be ducted vertically or horizontally.
- Ventilation system is preset to recirculate air inside with no ducting system required. Exhausting air outside is optional, using either vertical or horizontal ducting system. (Refer to Ducted Option Specifications for outside ventilation.)
- Sones Rating – 6.6
- Voltage Rating – 120V/60 Hz/15 Amps
- Connected Load (kW Rating) @ 120 Volts = 0.36kW (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 2.89 Amps
- Always consult local and national electric codes. Check local building codes for installation requirements, as they may vary per locale.
- Connect vent hood with copper wire only.
- Minimum installation height allowed from bottom of hood to cooking surface is 24" - 30" for electric and 30" for gas. (NOT more than 36" recommended.)
- To improve performance, optional Charcoal Filter (PN# RHCF400GS) recommended for use with recirculating system.

## Ducted Option Specifications

- For outside ventilation.
- Exhaust Duct Required – 7" round or 3-1/4" x 10"
- To accommodate pre-existing, off-center ductwork, vent hood can be installed up to one inch on either side of hood center. In extreme off-center installation, one end of duct connector can be modified to clear electrical cable clamp.
- For most efficient airflow exhaust, use a straight run or as few elbows as possible.
- Use metallic flex ducting only to connect rigid duct directly to transitions (if allowed by code).
- Thermal breaks such as short section of nonmetallic duct, should be used in areas of extreme cold.
- Cold weather installations should have additional backdraft damper installed.
- Refer to installation instructions on web for detailed duct preparation and converting exhaust vent blower system for exterior exhaust ventilation.

**Note: For planning purposes only. Refer to Product Installation Guide on the web at [electroluxappliances.ca](http://electroluxappliances.ca) for detailed instructions.**

## Optional Accessories

- Charcoal Filter – (PN# RHCF400GS).