

Induction Cooktops

EW36IC60IS




More Energy Efficient

Cooking with induction is 70% more efficient than gas and 20% more efficient than electric.



More Responsive

Cooking with induction is more responsive than gas or electric—you can instantly adjust the heat to a delicate simmer or bring it to a quick boil.



7"/11" Dual Element

Powerful and versatile element accommodates smaller cookware at a high level of performance, but with the same energy efficiency induction cooking provides. The 11" burner size provides up to 3,400 watts of power for larger pots and pans.



Exceptional Temperature Control

Adjust heat with greater accuracy than gas or electric cooktops, especially at lower settings. Perfect for melting chocolate and cooking delicate foods and sauces.

36" INDUCTION COOKTOPS

Features

| | |
|--|-----|
| Perfect Set® Electronic Touch Controls | Yes |
| Ceramic Smoothtop Glass Surface | Yes |
| 7"/11" Dual Element – 3400W | 1 |
| 8" Induction Cooking Element – 2300W/3200W | 2 |
| 7" Induction Cooking Element – 1900W | 1 |
| 6" Induction Cooking Element – 1500W | 1 |
| Hot Surface Indicator Lights | Yes |
| Sealed Spill Control Cooktop | Yes |
| Sabbath Mode (Star-K® Certified) | Yes |

Accessories


| | |
|---|----------|
| Granite Countertop Installation Kit – PN# 903061-9010 | Optional |
|---|----------|

Specifications

| | |
|---|-------------------|
| Colour – | |
| Stainless Steel | S |
| Product Dimensions – | |
| Width | 36-3/4" |
| Depth | 21-3/4" |
| Height (Extreme Bottom to Underside of Cooktop) | 2-1/2" |
| Power Supply Connection Location | Right Center Rear |
| Connected Load (kW Rating) @ 240/208 Volts | 11.1/9.9 |
| Amps @ 240/208 Volts | 46/48 |
| Minimum Circuit Required (Amps) | 50 |
| Electrical – Single phase 4-wire cable, 120/240 Volts or 120/208 Volts, 60 Hz, fused on both sides of line with ground. | Required |
| Armored Electrical Cable | Included |
| Approved for Single Oven Combination Installation** | Yes |
| Approved for Downdraft Combination Installation** | Yes |
| Shipping Weight (Approx.) | 75 Lbs. |

*Approved to be used over any Electrolux Single Wall Oven OR in combination with any Electrolux 36" Downdraft Vent.

NOTE: Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at electroluxappliances.ca. Specifications subject to change.

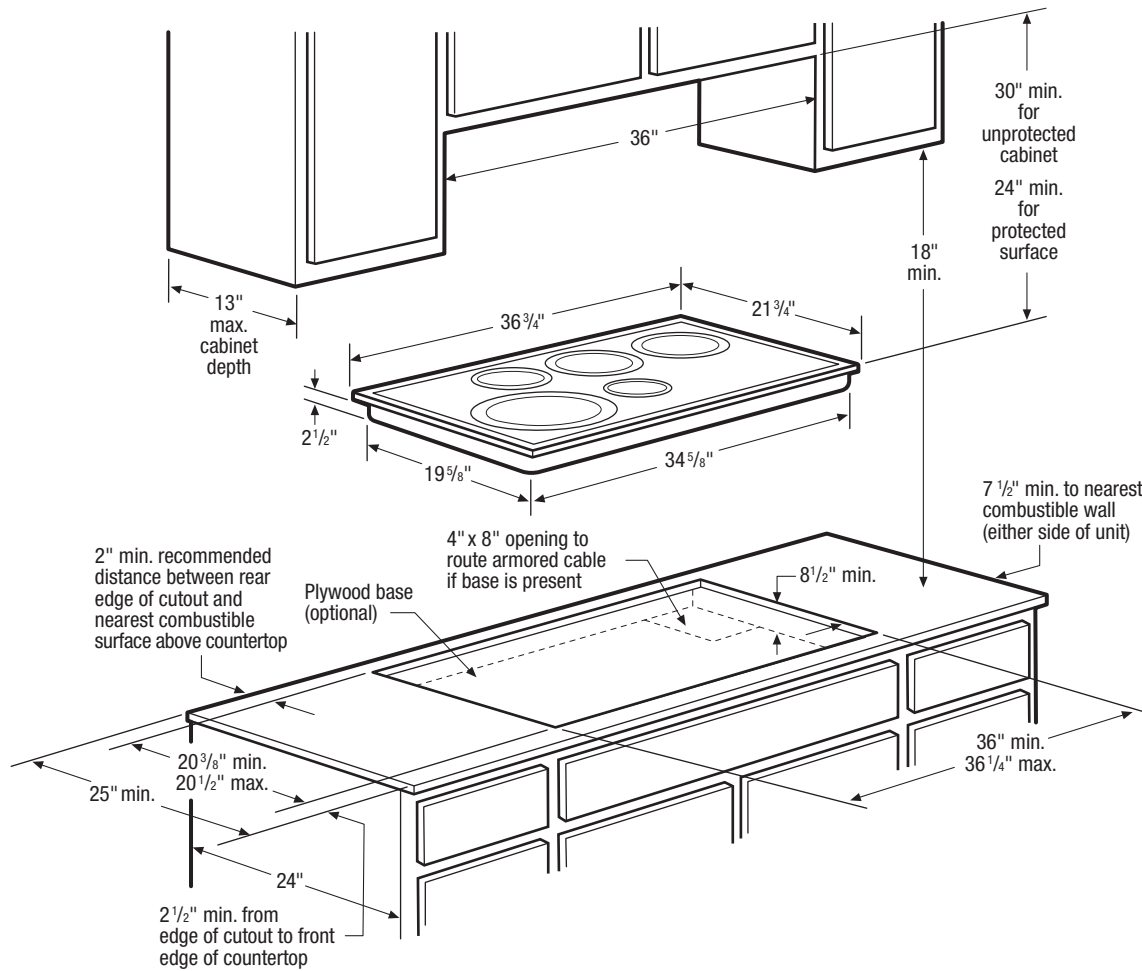

36" Induction Cooktop Specifications

- Product Weight – 60 Lbs.
- Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz, fused on both sides of line with ground.
- Connected Load (kW Rating) @ 240/208 Volts = 11.1/9.9kW
- Amps @ 240/208 Volts = 46.0/48.0 Amps
- Recommended Circuit Breaker – 50 Amps
- Always consult local and national electric codes.
- Allow 2" space beneath cooktop or optional platform to clear electrical cable and allow space for installation of junction box on wall at back of cooktop. Position center of junction box 10" inward from right side of cooktop cutout, and 12" down from underside of countertop.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Allow 30" minimum clearance between top of cooktop and bottom of unprotected wood or metal overhead cabinetry.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than 36".
- Allow 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/8" flame-retardant millboard covered with not less than No. 28 MGS sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.
- Allow 2" minimum clearance between rear edge of cutout and nearest combustible surface above countertop.

- Allow 7-1/2" minimum clearance from edge of cooktop to nearest combustible wall on either side of unit.
- Installation of drawers beneath cooktop requires minimum 10" clearance beneath countertop surface and assured clearance for electrical connection.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- Induction Cooktop model EW36IC60I is approved to be used over any Electrolux Electric Single Wall Oven. (Refer to *Electric Cooktop Installation Over 30"/27" Electric Single Wall Oven Specifications* page on web.)
- Induction Cooktop model EW36IC60I is approved to be used in combination with any Electrolux 36" Downdraft Vent. (Refer to *model-specific Downdraft Vent product page on web for detailed countertop preparation specifications.*)

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxappliances.ca for detailed instructions.

Optional Accessories

- Granite Countertop Installation Kit – (PN# 903061-9010).