

Microwave Combination Oven

EW30MC65JS

Featuring Wave-Touch® Electronic Controls





Wave-Touch® Controls

One simple touch and the control panel activates, showing the virtually endless cooking options. After you make your choices, all but the option selected will fade away, returning to an elegant display.



Luxury-Glide® Oven Racks

With a ball bearing system, oven racks are so smooth they extend effortlessly.



Perfect Convect3®

Our convection technology features a third convection element for consistently even results, up to 30% faster cooking times and even more baking options.




Automatic Cooking Options

The microwave oven offers pre-programmed settings which include 12 Auto Cook options, 3 Auto Reheat options and 6 Auto Defrost options for your cooking flexibility.

Microwave Features	
Oven Cavity	1.5 Cu. Ft.
Watts	900
Oven Interior	Stainless Steel
nterior Krypton Light	Yes
Porcelain Enamel Turntable	Cobalt Blue
Microwave Control Panel Features	
Wave-Touch® Electronic Controls	Yes
Electronic Clock & Timer	Yes
Humidity Sensor	Yes
Power Levels	11
Touch Pad Controls	29
Auto Defrost Options	6
Auto Cook Options – Pizza Slice (1), Snacks (3), Kid's Meals (3), Soften/Melt (4), Beverage (1)	12
Auto Reheat Options – Breads/Muffins (2), Pasta/Casserole (1)	3
Sensor-Cook Options – Cook (5), Reheat (1), Popcorn (2), Baked Potato (1), Frozen Vegetables (1), Fresh Vegetables (2)	12
Multi-Stage Cooking Options	4
Add 30 Seconds	Yes
Adjustable Sound Level for Timers/Reminders	Yes
Oven Features	
Oven Cavity	4.2 Cu. Ft.
Hidden Bake Element	Yes
Electric Bake Element / Convection Element – 2200W / 2500W	Yes / Yes
Eight-Pass Broil Element – 4000 Watts	Yes
Oven Interior	Colbalt Blue
Self-Clean Options with Door Lock	3
Perfect Convect ^{3®} with Variable 2-Speed Fan Cooking Modes – Bake Broil Convection Bake Convection Boast	Yes 7
Bake, Broil, Convection Bake, Convection Roast, Convection Broil, Keep Warm, Slow Cook Baking Options – Perfect Turkey®, Defrost, Dehydrate, Bread Proof,	
My Favorites, Multi-Stage Cooking, Temperature Probe, Rapid Preheat, Delay Bake, Convection Convert	10
Luxury-Design® Lighting with Dual 40W Halogen Bulbs Luxury-Glide® Racks/Conventional Racks	Yes 2 / 1
Convection Roasting Rack	Yes
Luxury-Hold™ Oven Door	Yes
Sabbath Mode (Star-K® Certified)	Yes
Oven Central Banel Features	
Oven Control Panel Features	V
Wave-Touch® Electronic Oven Control	Yes Yes
Keypad Entry of Time & Temperature Electronic Clock, Timer & Temperature Display	Yes
Programmable for °F or °C	Yes
Automatic Oven (Delay, Cook & Off)	Yes
Lockout	Yes
Automatic Oven Shutoff – 12 Hour	Yes
Luxury-Design® Halogen Oven Light Touch Pad	Yes
Accessories	
Porcelain Broiler Pan and Insert	Included
3"-high Bottom Trim – See Back for Part Numbers	Optional
Specifications	
Color – Stainless Steel	S
Microwave Oven Cavity HxWxD	9-5/8"x16-1/8"x16-1/8"
Oven Cavity HxWxD	16-1/2"x24-1/8"x18-1/16
Product Dimensions –	
Height (Including 1" Bottom Trim)	45-1/4"
Width	30"
Depth (to Front Door Corner)	24-1/2"
(with 90° Door Open)	45-1/2"
Power Supply Connection Location	Left Bottom Rear
Connected Load (kW Rating) @ 240/208 Volts	7.1/6.1
Amps @ 240/208 Volts	29.6/29.3 40
Minimum Circuit Paguirod (Amna)	441.7
Minimum Circuit Required (Amps) Shipping Weight (Approx.)	297



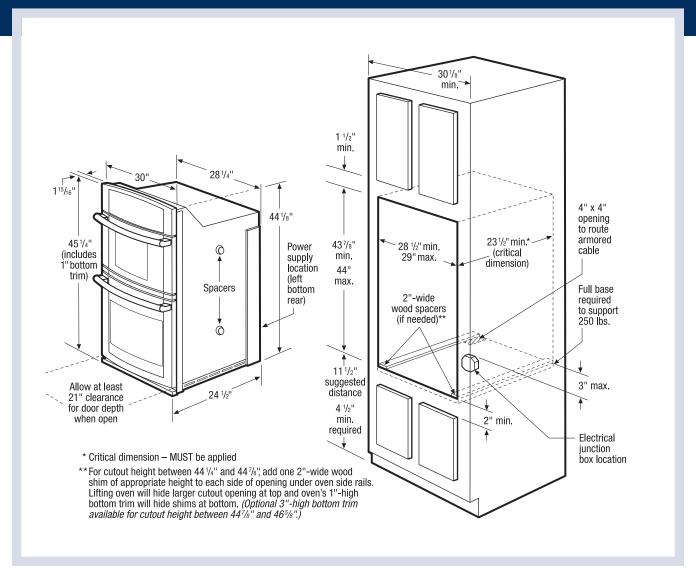

30" Microwave Combination Oven Specifications

- Product Weight 250 Lbs.
- Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line
- Connected Load (kW Rating) @ 240/208 Volts = 7.1/6.1 kW
- Amps @ 240/208 Volts = 29.6/29.3 Amps
- Recommended Circuit Breaker 40 Amps
- Always consult local and national electric codes.
- Minimum 21" clearance for oven door depth when open.
- Suggested distance from floor is 11-1/2". Minimum required distance is 4-1/2".
- To adapt Microwave Combination Oven to fit cutout height between 44-1/4" and 44-7/8", add one 2"-wide wood shim of appropriate height to each side of opening under oven side rails. Lifting oven will hide larger cutout opening at top and oven's 1"-high bottom trim will hide shims at bottom. (Standard 1"-High Bottom Trim included.)

- To adapt Microwave Combination Oven to fit cutout height between 44-7/8" and 46-5/8", optional 3"-High Bottom Trim available.
- Minimum 23-1/2" deep cutout dimension is critical for proper installation, to ensure that oven's faceplate will fit flush against cabinet front.
- Full oven base of solid plywood or similar material required, capable of supporting 250 Lbs.
- Base must be level and cabinet front must be square.
- Microwave Combination Oven is NOT approved to be used in stackable or side-by-side installation.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxappliances.com for detailed instructions.

Optional Accessories

• 3"-High Bottom Trim: S - (PN# 903114-9110).



