

# French Door Refrigerator

**EW23BC85K S** 

# Featuring Wave-Touch® Electronic Controls







## Perfect Temp® Drawer

Features nine preset selections including White/Sparkling Wine, Fish/Shellfish, Snacks and Chilled Beer, plus three customizable "My Favourites," giving you an array of choices to store or serve whatever you want at the ideal temperature.



### Most Usable Capacity<sup>1</sup>

Most usable space inside, same space on the outside, so you'll have space for everything from party platters and beverages to kids' snacks and juice boxes.



# **Wave-Touch® Controls**

One simple touch and the control panel activates. After you make your choices, options will fade away, returning to an uncluttered display.



## Luxury-Design® Glass Shelves

All-glass shelves crafted for exceptional beauty and function.

## 23 CU. FT. COUNTER-DEPTH FRENCH DOOR REFRIGERATORS **Capacities** Total Capacity Fresh Food Volume Freezer Volume Total Shelf Area Fresh Food Shelf Area Freezer Shelf Area

| Exterior                                    |             |  |
|---|-------------|--|
| Signature Soft-Arc Door and Handle Design   | Yes         |  |
| Electronic Controls                         | Wave-Touch® |  |
| Hidden Hinge Door Design                    | Yes         |  |
| Ice/Water Dispenser                         | Yes         |  |
| Perfect Set® Temperature Control System and | Display Yes |  |
| Crushed/Cubes/Water                         | Yes/Yes/Yes |  |
| Air and Water Filter Indicator/Reset        | Yes         |  |
| Ice Maker On/Off                            | Yes         |  |
| Fast Freeze™                                | Yes         |  |
| Lock/Dispenser Light Control                | Yes/Yes     |  |

22.6 Cu. Ft.

15.70 Cu.Ft.

6.89 Cu. Ft.

24.69 Sq. Ft.

6.60 Sq.Ft.

| PureAdvantage® Water & Ice                          | Yes   |
|---|---|
| PureAdvantage® Air Filtration/Water Filter Location | Yes/Bottom Left   |
| Temp Alarm System/Door Ajar Alarm                   | Yes/Yes   |
| Power Failure Alarm                                 | Yes   |
| Glass Shelves                                       | Luxury-Design® Lift-Off, 1<br>Quarter Width, 3 Half Width |
| Humidity-Controlled Left Crisper                    | Luxury-Close™   |
| Humidity-Controlled Right Crisper                   | Luxury-Close™   |
| Perfect Temp® Drawer                                | Luxury-Close™   |
| Cool Zone™ Drawer                                   |   |
| Wine and Beverage Mat                               | Yes   |
| Dispenser Bin                                       | Yes   |
| Clear Gallon Door Bins (Adjustable)                 | 1   |
| Clear 2-Litre Door Bins (Adjustable/Removable)      | 1/1   |
| Clear 1/2-Gallon Door Bins                          |   |
| Clear Condiment Bin                                 | 1   |
| Clear Dairy Door                                    |   |

| Freezer Conveniences                           |   |
|--|---|
| Automatic Ice Maker (Second Ice Maker)         | Yes   |
| Self-Closing Drawer                            | Yes   |
| Sliding Freezer Baskets                        | 2 Luxury-Glide®<br>(1 Deep Plastic w/Divider) |
| Soft Freeze™ Bin/Pizza Bin                     | Yes/No  |
| Tilt-Out Door Racks/Plastic Basket Tray        |   |
| Luxury-Design® LED Ramp-Up Multilevel Lighting | Yes   |
|  |   |

Yes

Tilt-Out Can Racks

Luxury-Design® LED Ramp-Up Multilevel Lighting


| Additional Features              |     |  |
|----------------------------------|-----|--|
| ENERGY STAR®                     | Yes |  |
| Sabbath Mode (Star-K® Certified) | Yes |  |
| Specifications                   |     |  |

| Specifications  |                                 |
|---|---------------------------------|
| Colour –  |                                 |
| Stainless Steel   | S                               |
| Product Dimensions -  |                                 |
| Height (with Hinges and 3/8" Rollers)   | 69-1/2"                         |
| Cabinet Width/Door Width  | 35-5/8"/36"                     |
| Depth (to Center of Arc) (with 90° Door Open) (with Drawer Fully Extended Including Handle) | 28-3/16"<br>42-9/16"<br>45-7/8" |
| Power Supply Connection Location  | Right Bottom Rear               |
| Water Inlet Location  | Left Bottom Rear                |
| Voltage Rating  | 120V/60 Hz/15 or 20A            |
| Connected Load (kW Rating) @ 120 Volts <sup>‡</sup>   | 1.02                            |
| Minimum Circuit Required (Amps)   | 15                              |
| Shipping Weight (Approx.)   | 350 Lbs.                        |

<sup>&</sup>lt;sup>‡</sup>An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with national and local codes & ordinances. NOTE: Always consult local and national electric & plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at electroduzappliances.ca. Specifications subject to change.

As compared to other French Door Counter-Depth models



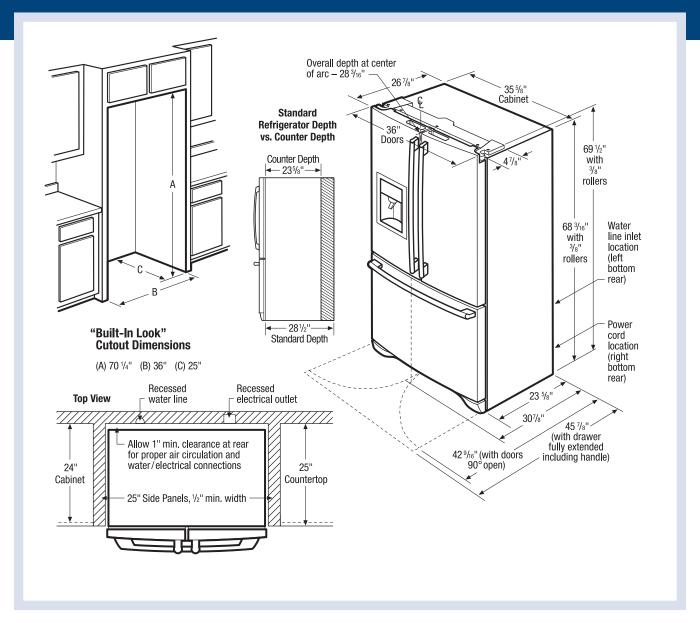

### **Counter-Depth French Door Refrigerator Specifications**

- Product Weight 345 Lbs.
- An electrical supply with grounded three-prong receptacle is required.
   The power supply circuit must be installed in accordance with national and local codes & ordinances.
- Voltage Rating 120V/60 Hz/15 or 20 Amps
- Connected Load (kW Rating) @ 120 Volts = 1.02 kW
- Amps @ 120 Volts = 8.5 Amps
- Always consult local and national electric & plumbing codes.
- Floor should be level surface of hard material, capable of supporting fully loaded refrigerator.
- When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 120° to 180° door swing, providing complete drawer/crisper access and removal. (Absolute 4-1/2" minimum clearance will ONLY allow for 90° door swing which will provide drawer/crisper access with restricted removal.)
- To ensure optimum performance, avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.

- For proper ventilation, front grille MUST remain unobstructed.
- Recess electrical outlet when possible.
- Water recess on rear wall recommended to prevent water line damage.
- Water Pressure Cold water line must provide between 30 and 100 pounds per square inch (psi).
- Copper tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation Kits available.
- · Adjustable front rollers to assist with door alignment.

#### "Built-In Look" Specifications

- Minimum opening of 70-1/4" H x 36" W x 25" D required to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- Remove all wall/floor moulding prior to installation.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxappliances.ca for detailed instructions.

