

# Built-In Microwave

## **EI24MO45I B**



Microwave includes choice of 30" or 27" Trim Kit available (shown with 30" Stainless Steel Trim Kit).



Microwave El24MO45l B with 30" Stainless Steel Trim Kit El30MO45T S



Microwave El24MO45l B with 27" Stainless Steel Trim Kit El27MO45T S



### Cook-2-Perfection® Technology

Evenly distributes microwave cooking energy throughout the oven's interior for even cooking. A 13" x 9" pan - with handles - can be evenly heated.



#### Sure-2-Fit® Capacity

Our 2.0 cu. ft. extra-large microwaves will hold nearly any dish.



#### **High-Performance Power**

With 11 power levels and 1,100 watts, our microwaves are capable of handling even the biggest cooking jobs.

30" or 27" Trim Kit	Order Separately
Oven Cavity	2.0 Cu. Ft.
Watts	1,100
Oven Interior	White
Interior Krypton Light	Yes
16" Glass Turntable	Yes
Control Panel Features	
IQ-Touch™ Electronic Controls	Yes
Front Display with Blue LED	Yes
Electronic Clock & Timer	Yes
Humidity Sensor	Yes
Power Levels	11
Touch Pad Controls	33
Auto-Start	Yes
Auto-Defrost Options	6
Auto-Cook Options – Pizza (1), Snacks (3), Kid's Meals (3), Soften/Melt (4)	11
Auto-Reheat Options – Breads/Muffins (2), Pasta/Casserole (1)	3
Beverage (0.5-2.0 Cups)	Yes
Sensor-Cook Options – Cook (5), Reheat, Popcorn, Baked Potato, Frozen Vegetables, Fresh Vegetables	10
Multi-Stage Cooking Options	4
Shorcut Options	6
Add 30 Seconds	Yes
Keep Warm	Yes
Custom Help Options	Yes
Panel Lock	Yes
Demo Mode	Yes
Adjustable Sound Level For Timers/Reminders	Yes
More/Less Function	Yes
Power Failure Indicator	Yes
Additional Features	
Signature Soft-Arc Oven Door	Yes
Glass Window	Yes
Required Trim Kit Options*	
30" Trim Kit – Stainless Steel	PN# EI30MO45TS
27" Trim Kit – Stainless Steel	PN# EI30MO45TS
	FIN# E12/10/04515
Specifications	
Colour –	
Black	В
Oven Cavity Dimensions –	10.1/0
Height	10-1/2"
Width	17-3/8"
Depth Product Pincersians	18-5/8"
Product Dimensions –	10.1(10)
Height	18-1/16"
Width (including Trim Kit - 30"/27")	30" / 27"
Depth (to Center of Arc)	20-1/16"
Approved for Under-Counter Installation	Yes
Approved for Electric Single Oven Combination Installation**	Yes
Power Supply Connection Location	Right Top Rear
Voltage Rating Connected Load (kW Rating) @ 120 Volts <sup>‡</sup>	120V/60 Hz/15 or 20. 1.5
	13
Amps @ 120 Volts	
60" Floatrical Cable	Included
	FOIbe
60" Electrical Cable Shipping Weight (Approx.) – Microwave Shipping Weight (Approx.) – 20" Trips Kit*	50 Lbs.
	50 Lbs. 12 Lbs. 12 Lbs.


Specifications subject to change.

<sup>‡</sup> For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.
\*Installation requires use of 30° or 27" Tim Kit (ordered by individual part number and shipped separate). Includes Bottom Duct Assembly.

separate), includes bottom but it is any Electrolux Electric Single Wall Oven and/or Warmer Drawer. (Not approved to be used in combination with any Electrolux Electric Single Wall Oven and/or Warmer Drawer. (Not approved to be used above any gas wall oven.)

NOTE: Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at electroluxappliances ca.



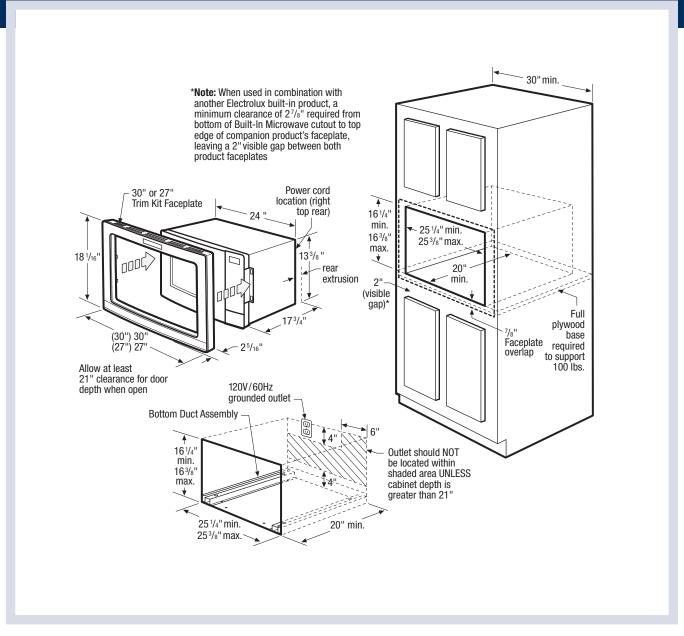

#### **Built-In Microwave Specifications**

- Product Weight (Microwave with Trim Kit) 51 Lbs.
- Voltage Rating –120V/60Hz/15 or 20 Amps
- Connected Load (kW Rating) @ 120 Volts = 1.5 kW (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 13 Amps
- · Always consult local and national electric codes.
- Allow 21" minimum clearance for 90° door swing.
- Installation requires use of 30" or 27" Trim Kit (ordered by individual part number and shipped separate). Includes Bottom Duct Assembly.
- Minimum 20" deep oven cutout dimension is critical for proper installation for oven and faceplate to fit flush against cabinet front.
- Consult local building code, in the event that cutout opening may be required to be enclosed with sides, ceiling and rear partition.
- Full oven base of solid plywood or similar material required, capable of supporting 100 Lbs.

- Base must be level and front of cabinet square for proper operation.
- Grounded outlet should NOT be located in shaded area, as indicated, unless cabinet depth is greater than 21".
- Can NOT be installed above any gas wall oven.
- Built-In Convection Microwave can be built in alone or is approved to be used in combination with any Electrolux Electric Single Wall Oven and/or Warmer Drawer. (Refer to model-specific Combination Installation Specification pages on web.)
- When used in combination with another Electrolux built-in product, a minimum clearance of 2-7/8" required from bottom of Built-In Microwave cutout to top edge of companion product's faceplate, leaving a 2" visible gap between both product faceplates.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxappliances.ca for detailed instructions.

