




VOLTERRA

WALL-MOUNT

COMFORT SERIES

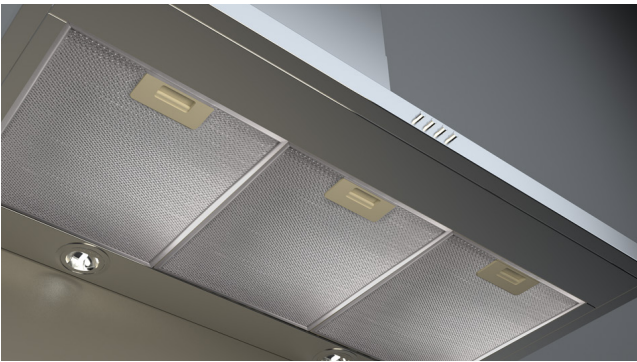

Volterra with its pyramid shaped angles and stainless steel finish make it a visually striking statement to any kitchen. Available in 30" or 36" widths, Volterra features stainless steel push button controls that manage multiple functions, including halogen lighting and the internal 3-speed blower.

Volterra features a telescopic chimney for ducted installation heights of 6'9" to 8'5" ceilings. Designed for standard ducted installation Volterra can also be installed as a recirculating system using the Recirculating Kit, available as an accessory.

MODELS

- EVL430S1 Volterra 30" Stainless
- EVL436S1 Volterra 36" Stainless

DIMENSIONS

- (30"W x 19 5/8"D x 10 1/4"H)
- (36"W x 19 5/8"D x 10 1/4"H)



Halogen Lamps



Stainless Steel
Push Button Controls



Anodized Aluminum
Mesh Filters

FEATURES

Size (in) & Type Finish	30" or 36" Wide Wall-Mount Chimney Stainless Steel
Controls	Stainless Steel Push Buttons
Illumination	2, 40 Watt Halogen Lamps, 1 Light Intensity (bulbs included)
Installation Type	Ducted or Recirculating Installation Recirculating Kit Sold Separately
Blower Type	400 CFM, 3-Speed Internal
Blower Performance	Speed 1, 160 CFM, 1.5 Sones Speed 2, 280 CFM, 3.1 Sones Speed 3, 400 CFM, 5.9 Sones
Filter Type	Dishwasher-Safe, Anodized Aluminum Mesh Grease Filters (2 w/30", 3 w/36")
Telescopic Chimney Extension	For heights 6'9" - 8'5" (ducted) For heights 6'9" - 8'9" (recirculating)
Duct Transition	6" Round with Back Draft Damper (top)
Electrical	120V-60Hz 300 Watts at 2.5 Amps
Warranty	2 Year Parts & Labor, In-Home Service

ACCESSORIES



Optional Recirculating Kit for 30" and 36" unit

CODE: KIT02766
MODEL: EXXRCK09



Optional Chimney Extension
Reaches 8'11" - 11'4" (ducted)
Reaches 8'11" - 11'8" (recirculating)

CODE: KIT02762
MODEL: EXXCEK05

CONSUMABLE PARTS

Replacement Grease Filter (1)
CODE: GRI0009219A

Replacement Carbon Filter (1)
CODE: KIT02667

Replacement Light Bulb (1)
CODE: 2006CL

Consumable parts are sold in units of one (1). Order accordingly.

LINE DRAWING

