FRIGIDAIRE.



Dryer CFRE1001PW



Signature Features

Ultra-Capacity Dryer*

Largest capacity lets you do the most laundry in the least amount of time.

Wrinkle Release Technology

This option features a Wrinkle Release System that finishes by tumbling without heat, preventing wrinkles, so your clothes look great every time.

Ready-Select® Controls

Easily select options with the touch of a button.

Reversible Door

Choose which direction you want the door to open to accommodate your space.

8 Dry Cycles 7.0 Cu. Ft. I.E.C. Electric

Product Dimensions

 Height
 42-1/2"

 Width
 27"

 Depth
 29"

More Easy To Use Features

- 4 Timed Dry Cycles
- **4 Temperature Selections**

Chime On/Off Alert

Available in:

Classic White (W)


*Select Models. Based on 7.0 cu.ft. capacity on 36" installation platform.





Factoria	
Features	
Total Capacity I.E.C. (Cu.Ft.)	7.0
Controls	Ready-Select*
Dryer Drum Interior	Painted Steel
Interior Light	
Framed Glass Window Door	
DrySense™ Technology	
Wrinkle Release Technology	Yes
TimeWise* Technology	
Moisture Sensor	
Estimated Time Remaining	
Cycle Status Lights	Yes
Cycle Signal	Chime
Cycle Signal "On/Off"	Yes
Control Lock	
Start/Pause/Cancel Knobs	Yes
Delay Start	
Tumble Speed (RPM)	50
Reversible Door	Yes
Lint Screen	Yes
Sound Package	
Adjustable Leveling Legs	4
Cycles	
Dry Cycles	8
Dry Cycles Specialty Cycles	8
Specialty Cycles	
Specialty Cycles Options	0
Specialty Cycles Options Temperature Selections	0
Specialty Cycles Options Temperature Selections Dryness Level Selections	4 0
Specialty Cycles Options Temperature Selections Dryness Level Selections Timed Dry	4 0
Specialty Cycles Options Temperature Selections Dryness Level Selections Timed Dry Energy Saver Option	4 0
Specialty Cycles Options Temperature Selections Dryness Level Selections Timed Dry Energy Saver Option Optional Accessories	0 4 0 15, 30, 60, 90
Specialty Cycles Options Temperature Selections Dryness Level Selections Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit	0 4 0 15, 30, 60, 90 PN# 137067200
Specialty Cycles Options Temperature Selections Dryness Level Selections Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit Drying Rack	0 4 0 15, 30, 60, 90 PN# 137067200
Specialty Cycles Options Temperature Selections Dryness Level Selections Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit Drying Rack Certifications	0 4 0 15, 30, 60, 90 PN# 137067200
Specialty Cycles Options Temperature Selections Dryness Level Selections Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit Drying Rack Certifications NSF* Certified	0 4 0 15, 30, 60, 90 PN# 137067200
Specialty Cycles Options Temperature Selections Dryness Level Selections Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit Drying Rack Certifications NSF* Certified Specifications	0 4 0 15, 30, 60, 90 PN# 137067200 PN# 137067300
Specialty Cycles Options Temperature Selections Dryness Level Selections Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit Drying Rack Certifications NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.)	0 4 0 15, 30, 60, 90 PN# 137067200 PN# 137067300
Specialty Cycles Options Temperature Selections Dryness Level Selections Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit Drying Rack Certifications NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location	0 4 0 15, 30, 60, 90 PN# 137067200 PN# 137067300
Specialty Cycles Options Temperature Selections Dryness Level Selections Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit Drying Rack Certifications NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Voltage Rating	0 4 0 15, 30, 60, 90 PN# 137067200 PN# 137067300
Specialty Cycles Options Temperature Selections Dryness Level Selections Timed Dry Energy Saver Option Optional Accessories Mobile Home Installation Kit Drying Rack Certifications NSF* Certified Specifications Maximum Exhaust Duct Length¹ (Ft.) Power Supply Connection Location Voltage Rating Connected Load (kW Rating) @ 240 Volts	0 4 0 15, 30, 60, 90 PN# 137067200 PN# 137067300 64 Rear 240V/60Hz/30A 5.4

Rigid metal duct preferred, semi-rigid optional and allow deductions for elbows and vents. Refer to Installation Guide on web for additional information.

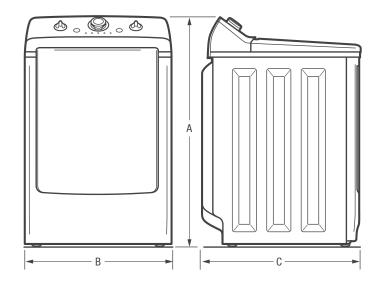

NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.ca.



Product Dimensions	
A-Height	42-1/2"
B-Width	27"
C-Depth	29"

Accessories information available on the web at **frigidaire.ca**