

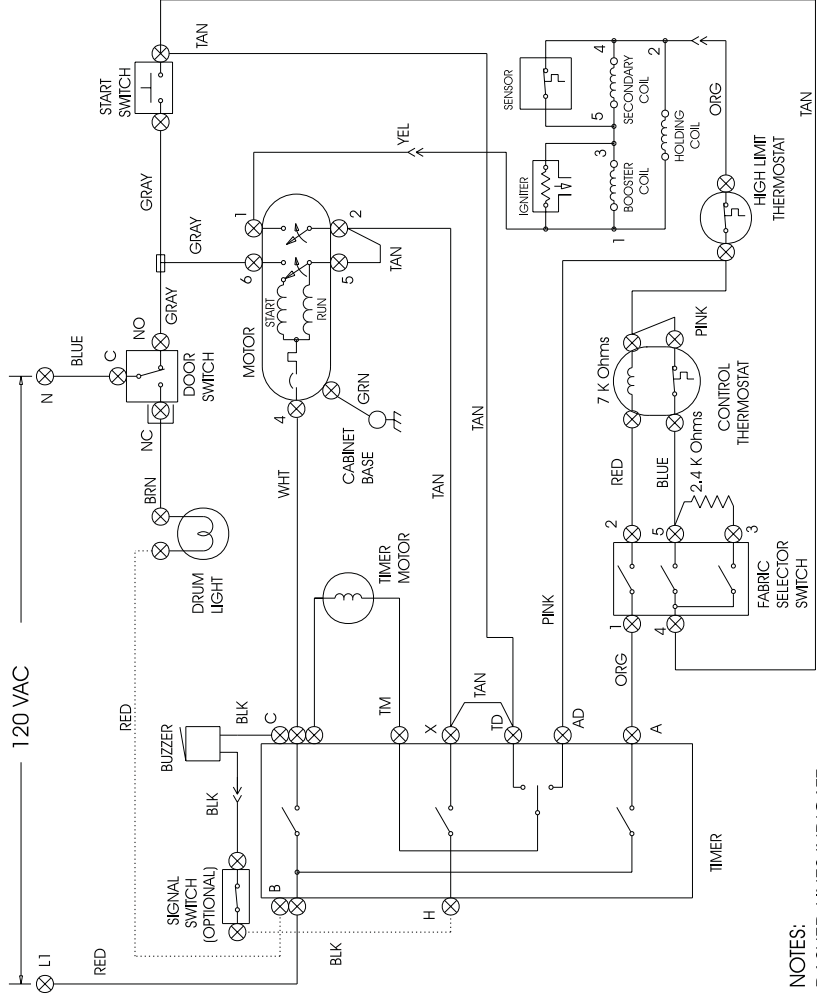


CAUTION: DISCONNECT ELECTRIC CURRENT BEFORE SERVICING. LABEL ALL WIRES PRIOR TO DISCONNECTION WHEN SERVICING CONTROLS. WIRING ERRORS CAN CAUSE IMPROPER AND DANGEROUS OPERATION. VERIFY PROPER OPERATION AFTER SERVICING.

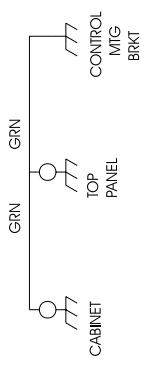

NOTES:
 DASHED LINES INDICATE CIRCUITS THAT ARE NOT IN ALL MODELS.

CYCLES

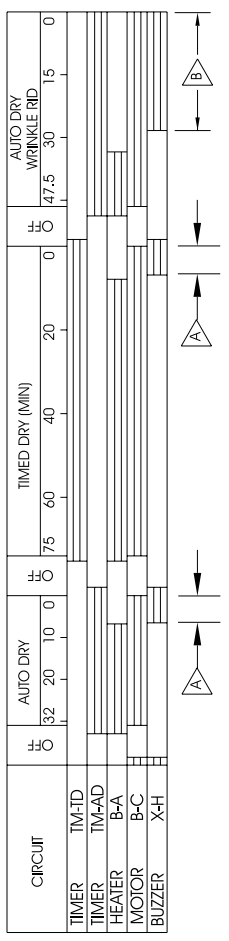

FABRIC SELECTOR SWITCH

FUNCTION	CIRCUIT
REGULAR	1-2 4-3 4-5
MEDIUM	X X X
LOW	X X X
AIR-FLUFF	X X X

X = CONTACTS CLOSED

WIRE SPECIFICATIONS

CODE	WIRE GAUGE A.W.G	INSULATION MATERIAL
20P	20	105°C PVC
18P	18	(POLYVINYLCHLORIDE)
14P	14	

NOTE: ALL UNSPECIFIED WIRE CODES ARE 18P.

BAR CHART TO THE LEFT REPRESENTS ONE COMPLETE REVOLUTION OF TIMER SHAFT.

SHADED PORTION OF BAR CHART INDICATES THE PROPORTIONAL TIMES THAT INTERNAL TIMER CONTACTS ARE CLOSED.

A PULSER CAM, LOCATED NEXT TO THE BUZZER CAM AND ROTATING AT 12 REVOLUTIONS PER HOUR, ALLOWS CIRCUIT "X-H" TO CLOSE FOR 5 SECONDS (+/- 3 SECONDS)

A 1 OR 2 TIMES IN THIS AREA
 B 5 TO 6 TIMES IN THIS AREA

WIRING CODES

⊕	PLUG-IN TIMER
⊗	QUICK DISCONNECT TERMINAL CONNECTION
+	NO CONNECTION
⊕	MOTOR SWITCH
⊖	SPUCE
⊖	MOTOR PROTECTOR
⊖	CHASSIS (CABINET) GROUND
⊖	SCREW TERMINAL
⊖	HARNESS CONNECTOR TERMINAL
⊖	INSULATED TERMINAL

- NOTES:
- ALL WIRING MUST CONFORM TO LOCAL ELECTRICAL CODES.
 - CONNECT DRYER TO A 15 AMPERE INDIVIDUAL BRANCH CIRCUIT.
 - TIMER SHOWN IN OFF POSITION; DOOR SWITCH CLOSED, MOTOR AT REST, THERMOSTAT CLOSED AND FABRIC SELECTOR SWITCH AT REGULAR.

WIRING DIAGRAM
 1317039

