

FRIGIDAIRE

GALLERY



Single Wall Ovens

CGEW3065K F/W/B

30" Electric



Powerful Performance

Effortless™ Convection Conversion
Quick Clean Options
Broil (4,000W)

Performance-Driven Style

Real Stainless Steel
Even Baking Technology

SpaceWise™ Design

SpaceWise™ Half Rack

One-Touch Options

Keep Warm
Chicken Nuggets
Pizza
Add-a-Minute

More Easy-To-Use Features

Hidden Bake
Extra-Large Window

Sabbath Mode (Star-K® Certified)


Capacities

4.2 Cu.Ft. Oven Capacity

Overall Exterior Dimensions

Height	29"
Width	30"
Depth	24-1/2"

Available in:



¹Based on single rack cooking performance, not set temperature, using Quick Preheat.

Signature Features



Quick Preheat

Preheat in less than six minutes.¹



True Convection

Multi-rack baking is faster and more even with True Convection.




Express-Select™ Controls

Easily set cooking temperature or choose one-touch cooking options.



Keep Warm Setting

Keep food warm until everything — and everyone — is ready.

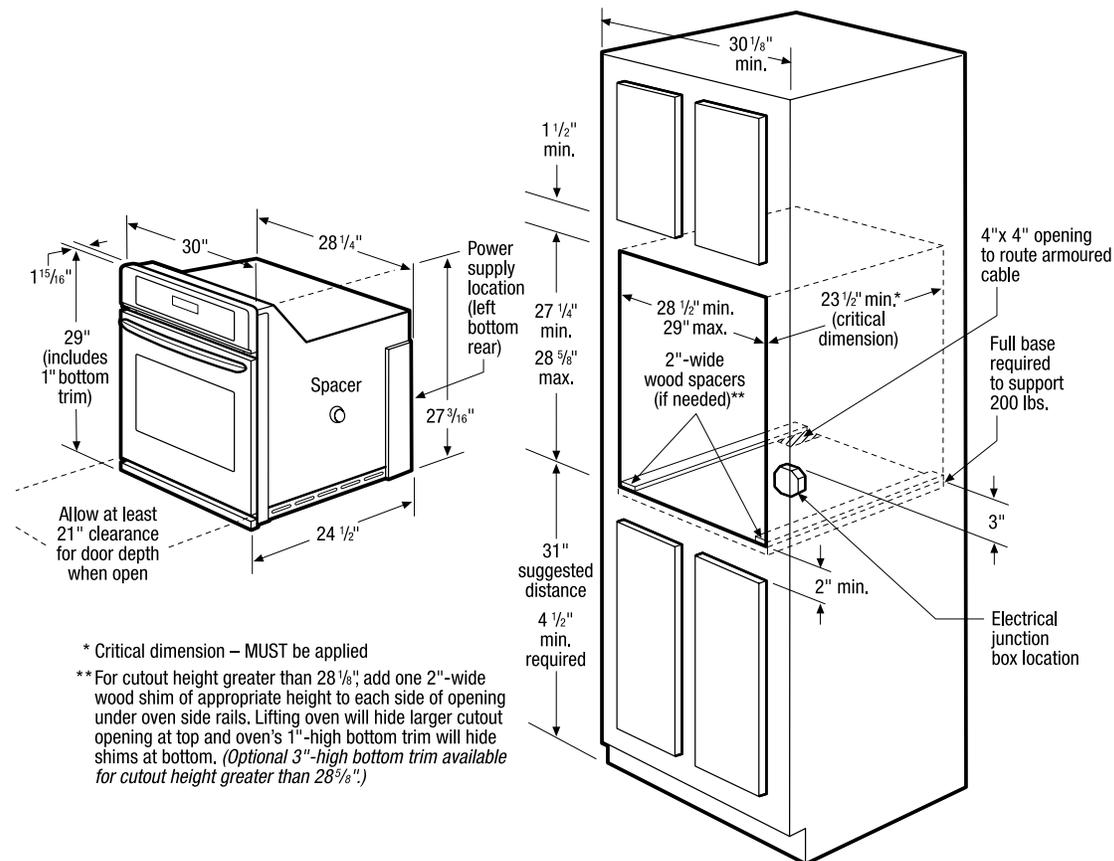

Single Wall Oven Specifications

- Product Shipping Weight (approx.) – 175 Lbs.
- Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.
- Connected Load (kW Rating) @ 240/208 Volts = 4.7/3.6kW
- Amps @ 240/208 Volts = 20.0/17.0 Amps
- Recommended Circuit Breaker – 20 Amps
- Always consult local and national electric codes.
- Minimum 21" clearance for oven door depth when open.
- Suggested distance from floor is 31". Minimum required distance is 4-1/2".
- Minimum 23-1/2" deep cutout dimension is critical for proper installation, to ensure that oven's faceplate will fit flush against cabinet front.
- To adapt oven to fit cutout height greater than 28-1/8", add one 2"-wide wood shim of appropriate height to each side of opening under oven side rails. Lifting oven will hide larger cutout opening at top and oven's 1"-high bottom trim will hide shims at bottom. (Standard 1"-High Bottom Trim included.)
- To adapt oven to fit cutout height greater than 28-5/8", optional 3"-High Bottom Trim available.

- Full oven base of solid plywood or similar material required, capable of supporting 200 Lbs.
- Base must be level and cabinet front must be square.
- Single Wall Ovens are NOT approved to be used in stackable or side-by-side installation.
- Single Wall Ovens are approved to be used alone in under-counter installation or beneath any approved Frigidaire® gas or electric cooktop. (Refer to Gas or Electric Cooktop Installation Over 30"/27" Electric Single Wall Oven Specifications pages on web.)
- Single Wall Ovens are approved to be used in combination with any Frigidaire® Warmer Drawer. (Refer to model-specific Warmer Drawer product page for Combination Installation Specifications.)
- Single Wall Ovens are approved to be used in combination with any Frigidaire® Built-In Microwave Oven.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.ca for detailed instructions.

Optional Accessories

- 3"-High Stainless Steel Bottom Trim – PN# 318258707.
- 3"-High White Bottom Trim – PN# 318258703.
- 3"-High Black Bottom Trim – PN# 318258704.