PDWT500/580R

GE Profile[™] Dishwasher with SmartDispense[™] Technology

Dimensions and Installation Information (in inches)


Electrical Rating

Voltage AC	120
Hertz	60
Total connected load amperage	9.9
Calrod® heater watts max	875

For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

tt Add 1/2" for deepest part of contour door. Allow an additional 2" for the handle on PDWT500/PDWT400/PDWT200 Series models.

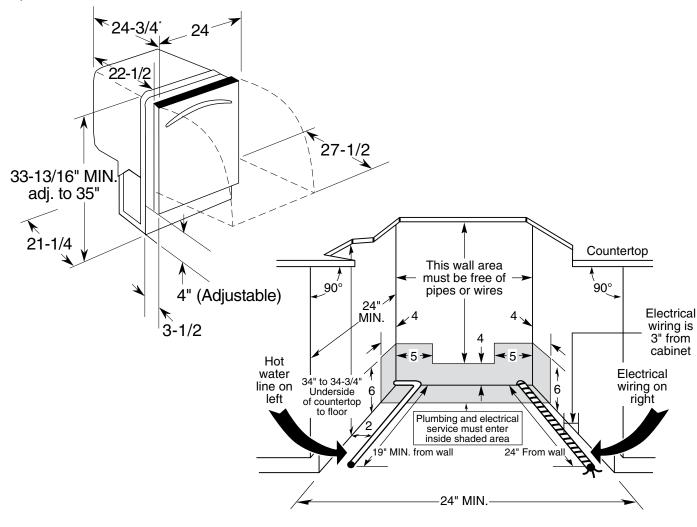

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800,626,2000.







As an ENERGY STAR® partner, GE has determined that this product meets the ENERGY STAR guidelines for energy efficiency.

PDWT500/580R

GE Profile[™] Dishwasher with SmartDispense[™] Technology

Features and Benefits

- PureClean wash system with 5-stage filtration Multiple filtration levels ensure clean dishes
- ENERGY STAR® Qualified Meets or exceeds federal guidelines for energy efficiency for year-round energy and money savings
- SmartDispense™ technology Holds up to 47 oz of detergent and dispenses it at just the right time
- DeepClean™ cycle with Steam Prewash Steam helps to loosen tough soils, like eggs, oatmeal and rice
- Single Rack Wash™ selection Perfect for washing glasses or smaller loads and uses less water
- Angled Rack Dry[™] System Rack allows dishes to rest at an angle, so water runs off and drying time is reduced
- Electronic controls with 8 cycles/6 options Modern controls make it easy to program the dishwasher
- QuietPower[™]47 sound package with ActiveVent 47 dBA Extremely quiet components and a hidden vent seal in sound
- Model PDWT580RSS Stainless steel
- Model PDWT500RWW White on white
- Model PDWT500RBB Black on black

