PB950SF GE Profile™ Series 30" Free-Standing Double Oven Range with Convection

Dimensions and Installation Information (in inches)

Receptacle Locations


Locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area in drawing for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against wall.

Note: This appliance has been approved for 0" spacing to adjacent surfaces above the cooktop. However, a 6" minimum spacing to surfaces less than 15" above the cooktop and adjacent cabinet is recommended to reduce exposure to steam, grease splatter and heat.

Installation Information: Before installing, consult installation instructions for current dimensional data and additional requirements.

KW Rating				
240V	13.5			
208V	10.1			
Breaker Size				
240V	40 Amps [†]			
208V	40 Amps [†]			

[†]Note: Check local codes for required breaker size.

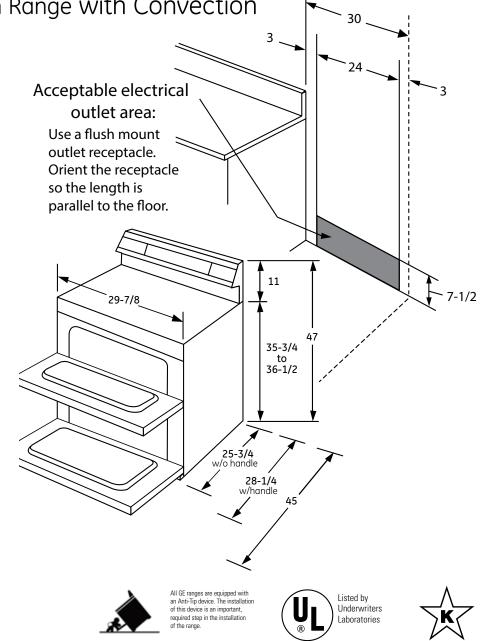



For answers to your Monogram[®] or GE[®] appliance questions, visit our website at geappliances.com or call GE Answer Center[®] service, 800.626.2000.

PB950SF GE Profile™ Series 30" Free-Standing Double Oven Range with Convection

Features and Benefits

- Double Oven 6.6 cu. ft. Total Oven Capacity Cook multiple dishes at once with two ovens
- True European Convection with Precise Air Enjoy perfectly even results without turning the pan
- 6"/9"/12" 3600W Power Boil Pots and pans fit perfectly on the flexible heating element
- Expandable Bridge Zone Use only the heat you need with an expandable cooktop zone
- Fast Preheat Make hot meals in a hurry with less time preheating
- Self-Clean Heavy-Duty Roller Rack Easily access items with racks that glide smoothly
- Glass Touch Controls Set temperatures quickly and clean with little effort
- Black Gloss Oven Interior Enjoy a clean and sleek appearance
- Fifth Element Warming Zone Provides low heat capability for foods
- Self-Clean Oven Cleans the oven cavity without the need for scrubbing
- Model PB950SFSS Stainless steel

Por solution of the solution o	6-30 F 2 2 4 5 5 F 2 7 4 5 6 F 7 7 6 6 F		Set Set	89
		//		
	8 9			

