

# Installation Instructions

## Backsplash Kit

### Tools Required:

#2 Phillips screw driver  
1/4" Hex head Driver

### Parts Supplied:

Backsplash Assembly  
5 Screws  
1 Spacer

## A Installing the Kit

The purpose of the backsplash kit is to fill the gap between the back of the range and the wall, when the countertop opening is cut to a 25" depth.

NOTE: This kit supplies a spacer that is used when a body side kit is used in conjunction with this kit. Keep this part for that type of application.

- A1** Attach the backsplash assembly to the rear of the range prior to installing the range in the countertop opening.
- A2** Attach the assembly to rear of the range to the five holes above the louvers using the 5 screws located in the pack. See Figure 1
- A3** If the backsplash is being attached to a Drop-In range, the anti-tip bracket must be moved to position 5 and proper attachments to the wall must be made to assure that the anti-tip bracket engages below the attachment. The attachment must be able to withstand 200 lbs of force at the engagement point. Refer to the Figure 2 below.
- A4** Refer to the range Installation Instructions to place the range in the countertop opening and perform all tests required.


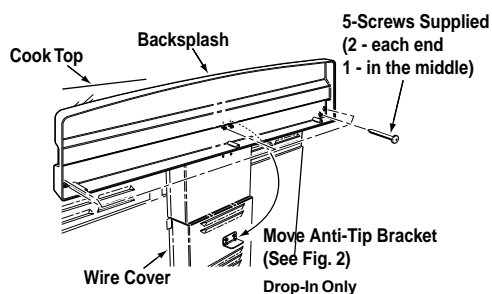


Fig. 1



### BACKSPLASH ANTI-TIP INSTALLATION DROP - IN ONLY

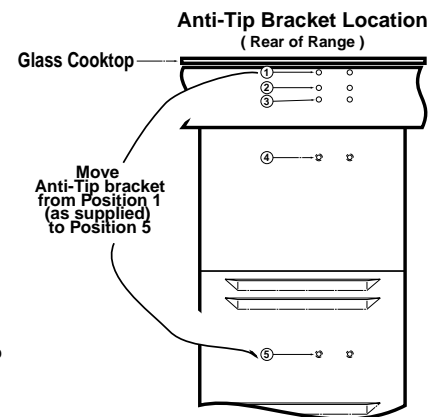
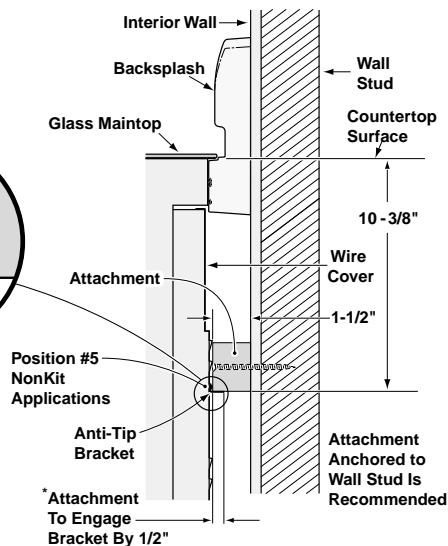


Fig. 2