P2S975BFM/WFM GE Profile™ 30" Dual Fuel Slide-In Gas Range

Dimensions and Installation Information (in inches)

Rear filler strip or backguard are available for these ranges

Note: Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

Note: Cabinets installed adjacent to slide-in ranges must have an adhesion spec of at least 194° temperature rating.

Optional Kits for Slide-In Gas Ranges:

(Available at additional cost)

Lower Trim Kits

JXS56BB - Lower Trim Kit (Black) JXS56WW - Lower Trim Kit (White)

Accessory Backguards

JXS32BB - Black Accessory Backguard JXS37BB - Black Glass Accessory Backguard JXS32WW - White Accessory Backguard

JXS37WW - White Glass Accessory Backguard


Rear Filler Strip

WB07T10680 - Black Filler Strip Assembly WB07T10681 - White Filler Strip Assembly

Installation Information: Before installing, consult installation instructions packed with product for current dimensional data.

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.




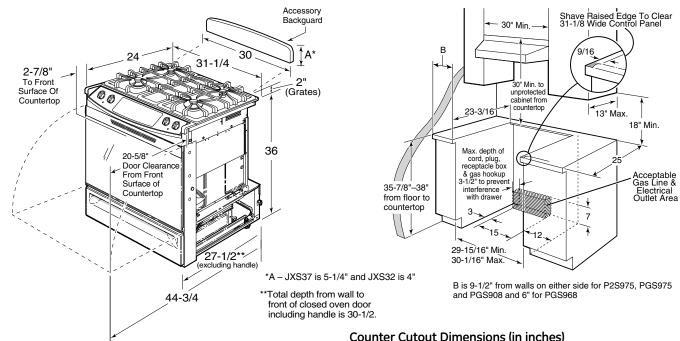

If you are NOT using the Filler strip or Backguard:

23-3/16

If you are using the Filler strip or Backquard:









P2S975BEM/WEM GE Profile™ 30" Dual Fuel Slide-In Gas Range

Features and Benefits

- Deep Recessed Cooktop Designed with a recessed surface to help contain spills and make cleaning easy
- Convection Bake (Multi-Rack) Provides ideal convection baking for multiple racks of food, ensuring superb results
- PreciseAir™ Convection System Delivers even air and heat circulation for superior baking and roasting results
- Convection Bake Provides ideal airflow throughout the oven cavity, ensuring better baking results
- Convection Roast Provides even cooking and consistent results, roasting meats faster than a traditional oven
- Self-Clean Heavy-Duty Oven Racks Double coated porcelain-enameled racks no longer require hand cleaning
- 18,000 BTU Stacked Burner Features a unique two-in-one burner design for 18,000 BTU boiling or gentle 140 degrees simmer
- Glass Touch Controls Features a smooth glass design that is easy-to-operate and easy-to-clean
- Continuous Grates Provide a flat, sturdy surface allowing easy movement of pans between burners
- Precise Simmer Burner Offers a low setting of 140°, ensuring more temperature control for simmering
- Gas Cooktop Lockout Prevents gas flow to cooktop and locks out oven controls, helping protect from unintended activation
- Model P2S975BEMBB Black
- Model P2S975WEMWW White

