

JMW3430W

# 30" COMBINATION MICROWAVE/WALL OVENS JMW3430W, JMW2430W, JMW2330W - 29¾" x 431/8" x 26¾"

## PRODUCT DIMENSIONS

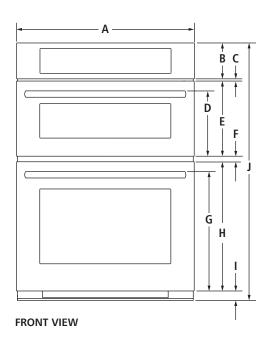

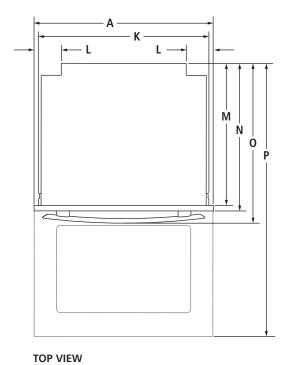

MODEL #		JMW2430W JMW2330W	
		in	cm
Α	Overall width Pro-Style® Stainless, Euro-Style Stainless or Oiled Bronze	29³/4	75.6
	Floating Glass	295/8	75.3
В	Height of control panel	6	15.2
C	Space between control panel and door	3/8	0.9
D	Height to top of microwave oven handle Pro-Style® Stainless	1111/4	28.7
	Euro-Style (color-coordinating)	11	28.0
Е	Height of microwave oven door	121/8	31.9
F	Space between doors	1	2.4
G	Height to top of oven handle Pro-Style® Stainless	201/4	51.4
	Euro-Style (color-coordinating)	20	50.7
Н	Height of oven door	215/8	54.9
ı	Height of trim	11/2	4.0
J	Overall height	431/8	109.4
K	Width of recessed oven	281/4	71.8
L	Width of conduit channel	35/8	9.3
М	Depth of recessed oven	237/8	60.5
N	Depth with doors	243/4	62.8
0	Depth with handles Pro-Style® Stainless	271/4	69.2
	Euro-Style (color-coordinating)	263/4	68.0
Р	Depth with door fully open	453/8	115.2




# 30" COMBINATION MICROWAVE/WALL OVENS JMW3430W, JMW2430W, JMW2330W - 293/4" x 431/8" x 263/4"

# 

MODEL #		JMW3430W JMW2430W JMW2330W		
		in	cm	
Α	Height to top of upper handle Pro-Style® Stainless	351/8	89.4	
A	Euro-Style (color-coordinating)	347/8	88.7	
В	Height to top of lower handle Pro-Style® Stainless	211/2	55.1	
Ь	Euro-Style (color-coordinating)	213/8	54.4	
С	Height of trim extending below cutout	1/4	0.6	
D	Height of recessed oven	41	104.2	
Е	Height to top of control panel	43	109.1	
F	Depth with door fully open	45¾	115.2	
G	Depth with handles Pro-Style® Stainless	271/4	69.2	
G	Euro-Style (color-coordinating)	26¾	68.0	
Н	Depth with doors	243/4	62.8	
ı	Depth of recessed oven	231/8	60.5	

# 30" COMBINATION MICROWAVE/WALL OVENS JMW3430W, JMW2430W, JMW2330W – 29<sup>3</sup>/<sub>4</sub>" x 43<sup>1</sup>/<sub>8</sub>" x 26<sup>3</sup>/<sub>4</sub>"

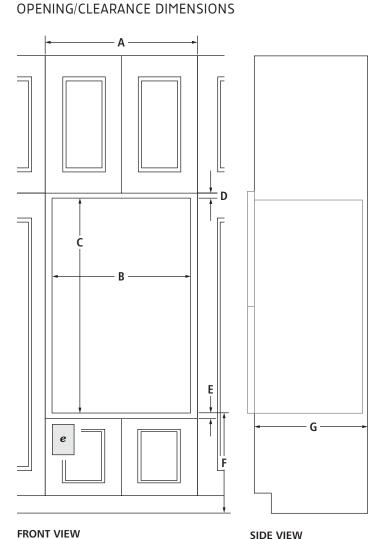


MODEL #		JMW3430W JMW2430W JMW2330W	
		in	cm
Α	Width of cabinet (min.)	30	76.2
В	Width of cutout	281/2	72.4
С	Height of cutout	411/4	104.8
D	Top of cutout to bottom of upper cabinet door (min.)	2	5.1
Е	Bottom of cutout to top of lower cabinet door (min.)	1 1/2	3.8
F	Bottom of cutout to floor	45/8- 191/4	11.7- 48.9
G	Depth of cutout (min.)	24	61.0
e	Recommended junction box location	n	

#### **ELECTRICAL REQUIREMENTS**

 $240\ \text{volt},\,40\text{-amp}$  fused, grounded circuit is required. A dedicated circuit is recommended.

The length of conduit provided is for serviceability. Do not cut the conduit. The junction box should be located  $3^{\circ}$  (7.6 cm) maximum below the support surface. Drill a  $1^{1}/\!\!4^{\circ}$  (3.4 cm) minimum diameter hole in the left rear corner of the support surface for access to the junction box.



**BACK VIEW** 




JMW3430W

## 30" COMBINATION MICROWAVE/WALL OVENS - FLUSH INSTALLATION

JMW3430W, JMW2430W, JMW2330W - 293/4" x 431/8" x 243/4" (depth without handles)

### OPENING/CLEARANCE DIMENSIONS

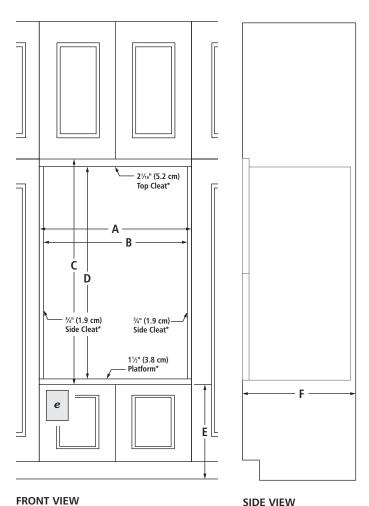

MOE	DEL #	JMW2430W JMW2330W	
		in	cm
Α	Width of flush inset cutout (min.)	30	76.2
В	Width of opening (min.)	281/2	72.4
C	Height of flush inset cutout (min.)	4413/16	113.8
D	Height of opening (min.)	411/4	104.8
Е	Bottom of cutout to floor	45/8- 191/4	11.7- 48.9
F	Depth of cutout (min.)	25	63.5
e	Recommended junction box location	n	

#### **ELECTRICAL REQUIREMENTS**

240 volt, 40-amp fused, grounded circuit is required. A dedicated circuit is recommended.


The length of conduit provided is for serviceability. Do not cut the conduit. The junction box should be located  $3^{\circ}$  (7.6 cm) maximum below the support surface. Drill a  $1^{1}/4^{\circ}$  (3.4 cm) minimum diameter hole in the left rear corner of the support surface for access to the junction box.

#### FLUSH INSTALLATION REQUIREMENTS

A 25" (63.5 cm) minimum cutout depth is required.

These dimensions will result in a 3%" (1.0 cm) reveal on the top, a 1%" (0.3 cm) reveal on the sides and a 13%" (3.5 cm) reveal on the bottom of the wall oven.

The front face of the cleats and platform will be visible and should be treated as a finished surface.

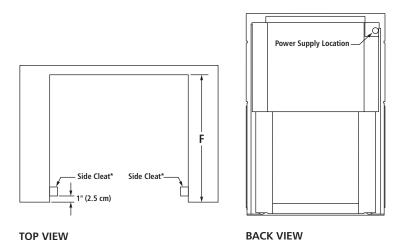

<sup>\*</sup>Cleats and platform must be recessed 1" (2.5 cm) from the front of the cabinet.

