


27" DOUBLE WALL OVENS


JJW2827D, JJW2727D – 27" x 53³/₈" x 25⁵/₁₆"

PRODUCT DIMENSIONS

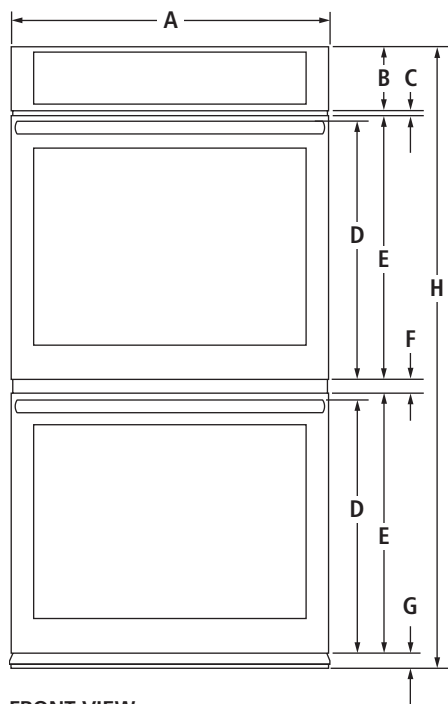

FRONT VIEW

MODEL #		JJW2827D JJW2727D	
		in	cm
A	Overall width		
	Euro-Style Stainless	27	68.6
	Floating Glass	26 ¹⁵ / ₁₆	68.4
B	Height of control panel	5 ¹ / ₂	14.0
C	Space between control panel and door	⁷ / ₁₆	1.1
D	Height to top of handle	21 ⁷ / ₁₆	54.4
E	Height of door	22 ¹ / ₈	56.2
F	Space between doors	¹¹ / ₁₆	1.7
G	Height of trim	1 ¹¹ / ₁₆	4.3
H	Overall height	53 ³ / ₈	133.0
I	Width of recessed oven	25 ⁵ / ₁₆	64.6
J	Width of conduit channel	2 ¹ / ₂	6.3
K	Depth of recessed oven	23 ¹ / ₈	58.7
L	Depth with doors	24 ⁵ / ₁₆	61.8
M	Depth with handles	25 ⁵ / ₁₆	64.3
N	Depth with door fully open	45 ³ / ₈	115.3

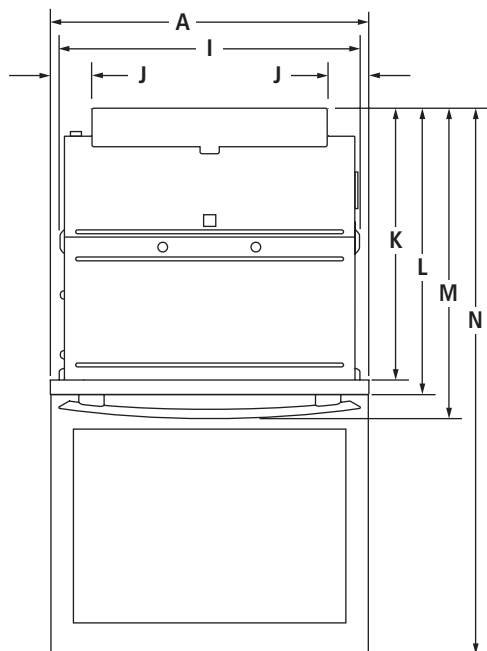


TOP VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

27" DOUBLE WALL OVENS

JJW2827D, JJW2727D – 27" x 53³/₈" x 25⁵/₁₆"

DIMENSIONS AS INSTALLED

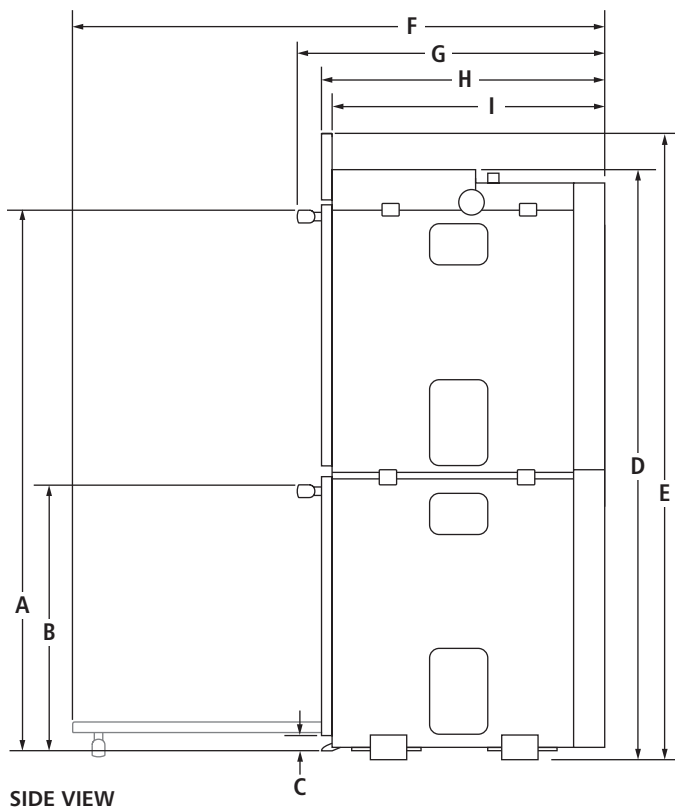

MODEL #		JJW2827D JJW2727D	
		in	cm
A	Height to top of upper handle	46 ¹ / ₁₆	117
B	Height to top of lower handle	23 ⁵ / ₁₆	59.2
C	Height of trim extending below cutout	1 ¹¹ / ₁₆	4.3
D	Height of recessed oven	48 ¹³ / ₁₆	124.0
E	Height to top of control panel	53 ³ / ₈	133.0
F	Depth with door fully open	45 ³ / ₈	115.3
G	Depth with handles	25 ⁵ / ₁₆	64.3
H	Depth with doors	24 ⁵ / ₁₆	61.8
I	Depth of recessed oven	23 ¹ / ₈	58.7


IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.



27" DOUBLE WALL OVENS


JJW2827D, JJW2727D – 27" x 53³/₈" x 25⁵/₁₆"

OPENING/CLEARANCE DIMENSIONS

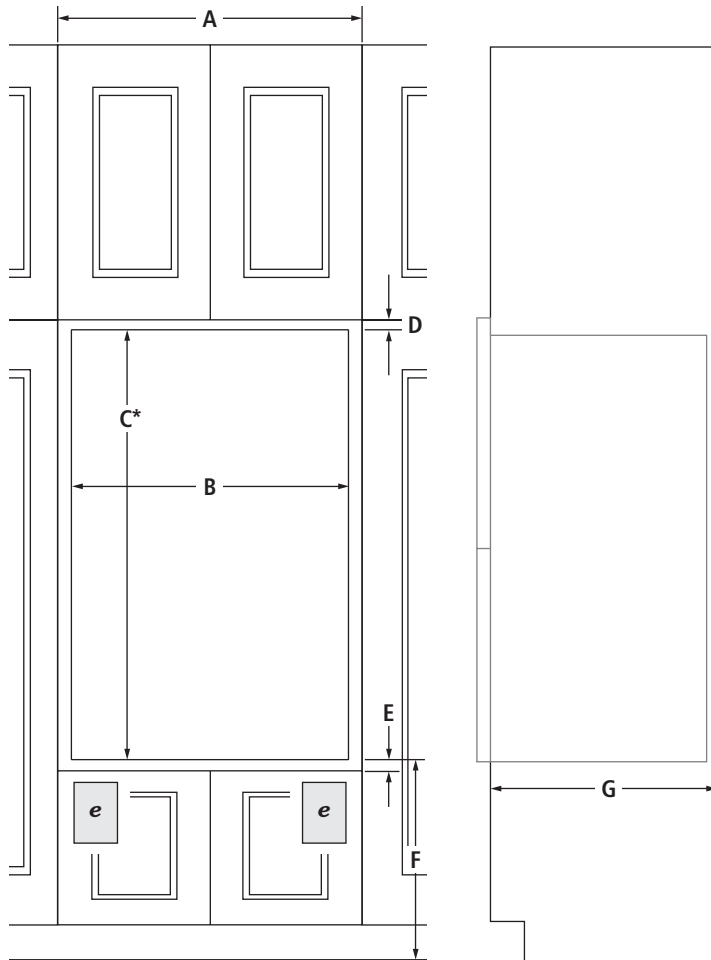

FRONT VIEW

SIDE VIEW

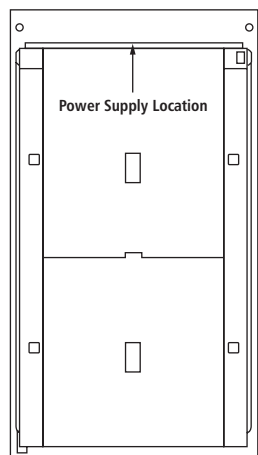

BACK VIEW

MODEL #		JJW2827D JJW2727D	
		in	cm
A	Width of cabinet (min.)	27	68.6
B	Width of cutout	25½	64.8
C*	Height of cutout (recommended)	50¼	127.6
D	Top of cutout to bottom of upper cabinet door (min.)	2 ³ / ₁₆	5.5
E	Bottom of cutout to top of lower cabinet door (min.)	1½	3.8
F	Bottom of cutout to floor	4-14 ³ / ₄	10.2-37.5
G	Depth of cutout (min.)	24	61.0
e	Recommended junction box location		

* Will fit cutout height from 49½" (125.7 cm) to 52³/₁₆" (132.6 cm).

ELECTRICAL REQUIREMENTS

240 volt, 40-amp fused, grounded circuit is required. A dedicated circuit is required.


The length of conduit provided is for serviceability. Do not cut the conduit. The junction box should be located 3" (7.6 cm) maximum below the support surface. Drill a 1" (2.5 cm) minimum diameter hole in the right rear or left rear corner of the support surface for access to the junction box.

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

27" DOUBLE WALL OVENS – FLUSH INSTALLATION


JJW2827D, JJW2727D – 27" x 53³/₈" x 24⁵/₁₆" (depth without handles)

OPENING/CLEARANCE DIMENSIONS

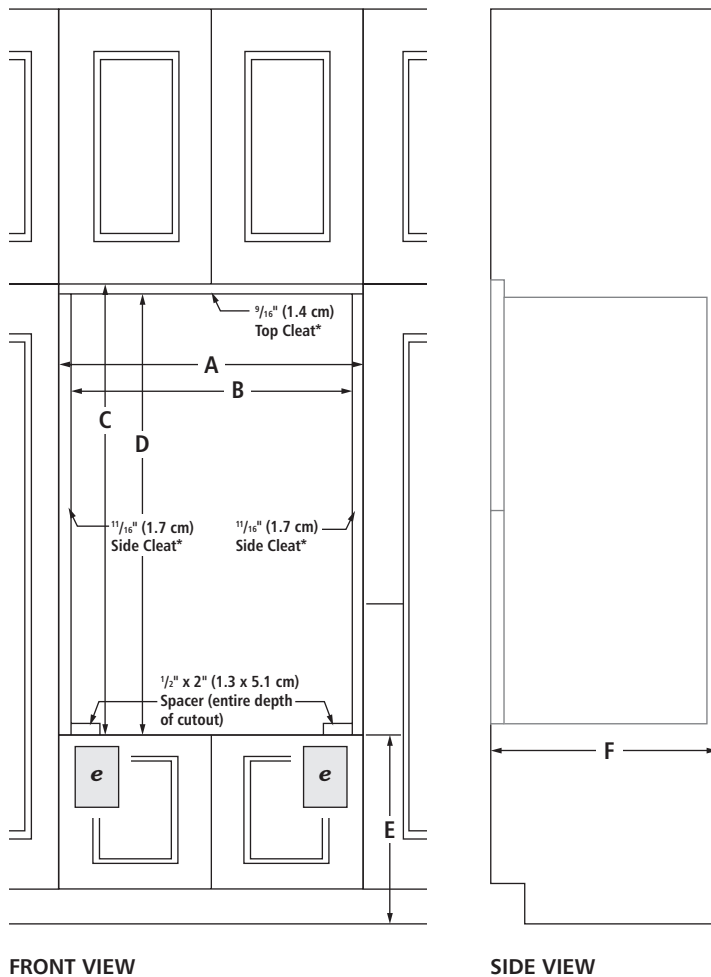


FRONT VIEW

SIDE VIEW

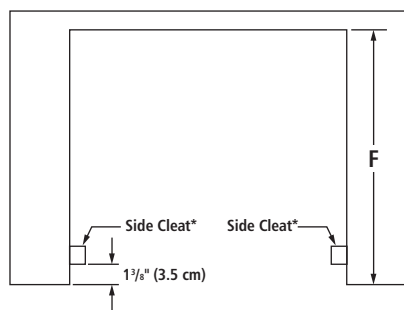

TOP VIEW

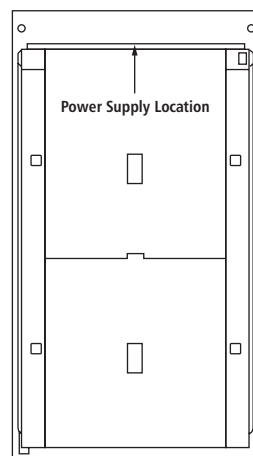

BACK VIEW

* Cleats and spacers must be recessed 1 3/8 (3.5 cm) from the front of the cabinet.

MODEL #	JJW2827D JJW2727D	
	in	cm
A	Width of flush inset cutout (min.)	27 ¹ / ₄ 69.2
B	Width of opening (min.)	25 ⁷ / ₈ 65.7
C	Height of flush inset cutout (min.)	53 ³ / ₁₆ 135.1
D	Height of opening (min.)	52 ⁵ / ₈ 133.6
E	Bottom of cutout to floor	4 ⁵ / ₈ -11.7- 14 ³ / ₄ 37.5
F	Depth of cutout (min.)	25 ³ / ₈ 64.4
e	Recommended junction box location	

ELECTRICAL REQUIREMENTS

240 volt, 40-amp fused, grounded circuit is required. A dedicated circuit is required.

The length of conduit provided is for serviceability. Do not cut the conduit. The junction box should be located 3" (7.6 cm) maximum below the support surface. Drill a 1" (2.5 cm) minimum diameter hole in the right rear or left rear corner of the support surface for access to the junction box.

FLUSH INSTALLATION REQUIREMENTS

A 25³/₈" (64.4 cm) minimum cutout depth is required.

These dimensions will result in a 1/4" (0.6 cm) reveal on the top, a 1/4" (0.6 cm) reveal on the sides and a 1/8" (0.3 cm) reveal on the bottom of the wall oven.

The front face of the cleats and spacers will be visible and should be treated as a finished surface.

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.