

30" INDUCTION RANGE JIS1450D - 29%" x 36" x 285/6"

PRODUCT DIMENSIONS



FRONT VIEW



TOP VIEW


MODEL #		JIS1450D	
		in	cm
Α	Overall width	297//8	75.9
В	Width of door/drawer	297/8	75.9
С	Height from cooktop to top of vent	13/16	2.0
D	Space between door and control panel	13/16	2.1
Е	Height to top of handle Pro-Style® Stainless	221//8	58.1
	Euro-Style Stainless	221//8	58.1
F	Height of door	231/4	59.0
G*	Height to top of cooktop edge	36	91.4
Н	Height of warming drawer	65/16	16.0
1	Space between door and warming drawer	13/16	2.0
J	Depth from front of console to back of range (max.)	2713/16	70.7
K	Depth from handle to back of range (max.) Pro-Style® Stainless	2815/16	73.5
	Euro-Style Stainless	285/16	71.9

^{*} With leveling legs screwed all the way in. Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.



30" INDUCTION RANGE JIS1450D - 291/8" x 36" x 285/16"

DIMENSIONS AS INSTALLED




MODEL #		JIS1450D	
		in	cm
A *	Height to top of cooking surface (min.)	35½	90.2
B*	Height to top of door (min.)	3011/16	78.0
C*	Height to top of handle (min.) Pro-Style® Stainless	30½	77.5
	Euro-Style Stainless	301/2	77.5
D*	Height to top of warming drawer (min.)	67/8	17.5
E*	Height to top of countertop (min.)	3513/16	91.0
F	Depth with door fully open	50%16	128.5
G	Depth with handle Pro-Style® Stainless	2815/16	73.5
	Euro-Style Stainless	285/16	71.9
Н	Depth without handle	2713/16	70.7
- 1	Depth without door	25	63.5
J	Depth with door	265/16	66.8
K	Height of countertop channel	1 ¹³ / ₁₆	4.6
L	Depth to countertop channel	13/16	3.0



^{*} With leveling legs screwed all the way in. Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

30" INDUCTION RANGE JIS1450D - 291/8" x 36" x 285/16"

OPENING/CLEARANCE DIMENSIONS

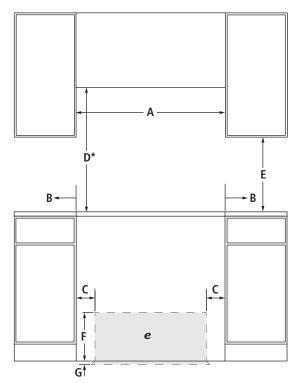

FRONT VIEW

SIDE VIEW


MODEL #		JIS1450D	
	in	cm	
Width of combustible area above cooking surface (min.)	30	76.2	
Width from cooktop to fixed wall or other combustible material (min.)	3	7.6	
Width from electrical installation area to cabinet (min.)	413/16	12.2	
Height to bottom of uncovered wood or metal cabinet above cooking surface (min.)	30	76.2	
Height to bottom of uncovered wood or metal cabinet (min.)	18	45.7	
Height of electrical installation area (max.)	711/16	19.5	
Depth of electrical installation area (max.)	311/16	9.4	
Depth of upper cabinet (recommended)	13	33.0	
Width of cutout	30	76.2	
Width to power cord	23/4	7.0	
Recommended junction box location			
	Width of combustible area above cooking surface (min.) Width from cooktop to fixed wall or other combustible material (min.) Width from electrical installation area to cabinet (min.) Height to bottom of uncovered wood or metal cabinet above cooking surface (min.) Height to bottom of uncovered wood or metal cabinet (min.) Height of electrical installation area (max.) Depth of electrical installation area (max.) Depth of upper cabinet (recommended) Width of cutout Width to power cord	in Width of combustible area above cooking surface (min.) Width from cooktop to fixed wall or other combustible material (min.) Width from electrical installation area to cabinet (min.) Height to bottom of uncovered wood or metal cabinet above cooking surface (min.) Height to bottom of uncovered wood or metal cabinet (min.) Height of electrical installation area (max.) Depth of electrical installation area (max.) Depth of upper cabinet (recommended) Width of cutout Width to power cord	

^{*}Dimension can be reduced by 6" (15.2 cm) when bottom of wood or metal cabinet is covered by not less than 1/4" (0.6 cm) flame retardant millboard covered with not less than No. 28 MSG sheet metal, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

If installing a hood or microwave hood combination above the range, follow the hood or microwave hood combination instructions for dimensional clearances above the cooking surface.

240 volt, 60 Hz, AC only, 40-amp fused, grounded circuit is required. A dedicated circuit is recommended. Minimum length of power cord is 48" (121.9 cm).

BACK VIEW

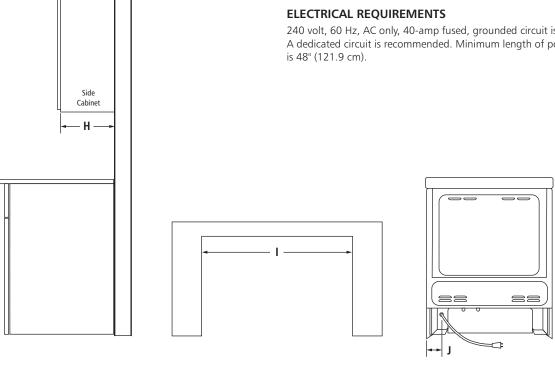

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

TOP VIEW - CUTOUT

