



69" STANDARD-DEPTH FRENCH DOOR REFRIGERATOR WITH ICE & WATER DISPENSER
JFX2897DR – 35⁵/₈" x 70¹/₈" x 35⁷/₁₆"

PRODUCT DIMENSIONS

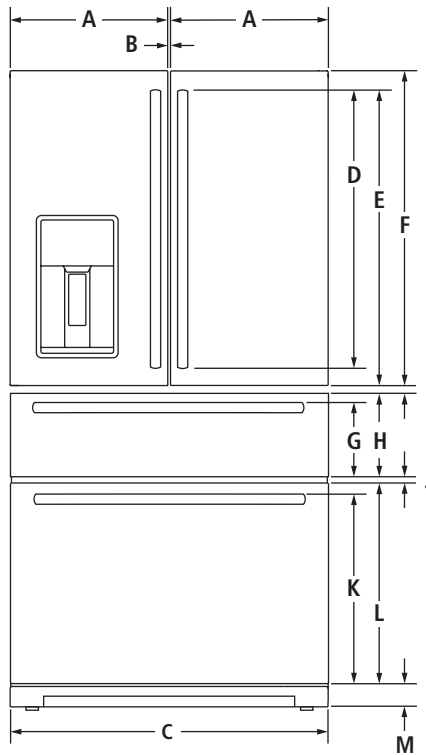

FRONT VIEW

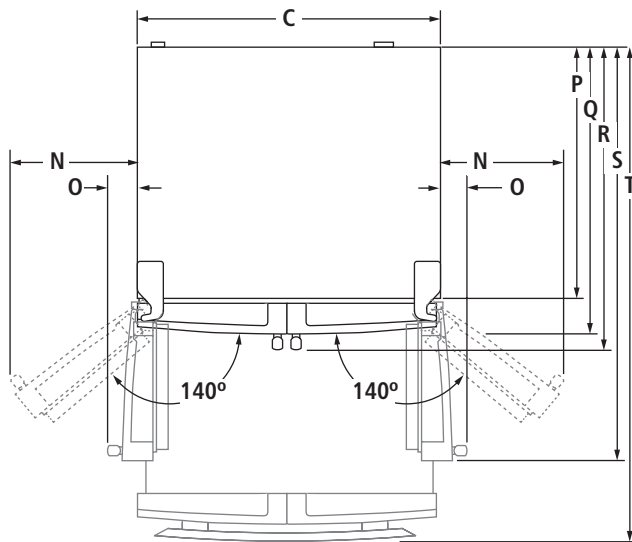


TOP VIEW

MODEL #		JFX2897DR	
		in	cm
A	Width of each door	17 ⁷ / ₈	45.4
B	Space between doors	³ / ₈	0.9
C	Overall width	35 ⁵ / ₈	90.5
D	Height of door handles		
	Pro-Style® Stainless	26	66.0
	Euro-Style Stainless	30 ¹ / ₂	77.5
E	Height to top of door handles		
	Pro-Style® Stainless	30 ³ / ₈	77.2
	Euro-Style Stainless	32 ¹ / ₂	82.5
F	Height of doors	34 ¹³ / ₁₆	88.4
G	Height to top of upper drawer handle		
	Pro-Style® Stainless	8 ³ / ₈	21.1
	Euro-Style Stainless	8 ¹ / ₄	21.0
H	Height of upper drawer	9 ⁷ / ₁₆	24.0
I	Space between doors and drawer	¹ / ₂	1.3
J	Space between drawers	¹ / ₂	1.3
K	Height to top of lower drawer handle		
	Pro-Style® Stainless	20 ⁹ / ₁₆	52.3
	Euro-Style Stainless	20 ⁵ / ₈	52.5
L	Height of lower drawer	21 ³ / ₄	55.2
M	Height of grille	2 ¹ / ₂	6.4
N	Width from side of refrigerator to handle – door fully open 140°		
	Pro-Style® Stainless	14 ¹ / ₂	36.9
	Euro-Style Stainless	13 ¹ / ₄	33.5
O	Width from side of refrigerator to handle – door open 90°		
	Pro-Style® Stainless	³ / ₈	9.9
	Euro-Style Stainless	2 ¹ / ₄	5.7
P	Depth without doors	29 ⁹ / ₁₆	75.1
Q	Depth with doors	33 ³ / ₄	85.7
R	Depth with handles		
	Pro-Style® Stainless	36	91.4
	Euro-Style Stainless	35 ⁷ / ₁₆	90.0
S	Depth with doors open 90°	48 ⁹ / ₁₆	123.4
T	Depth with upper drawer fully open	56 ¹⁵ / ₁₆	144.6

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

69" STANDARD-DEPTH FRENCH DOOR REFRIGERATOR WITH ICE & WATER DISPENSER
JFX2897DR – 35⁵/₈" x 70¹/₈" x 35⁷/₁₆"

DIMENSIONS AS INSTALLED

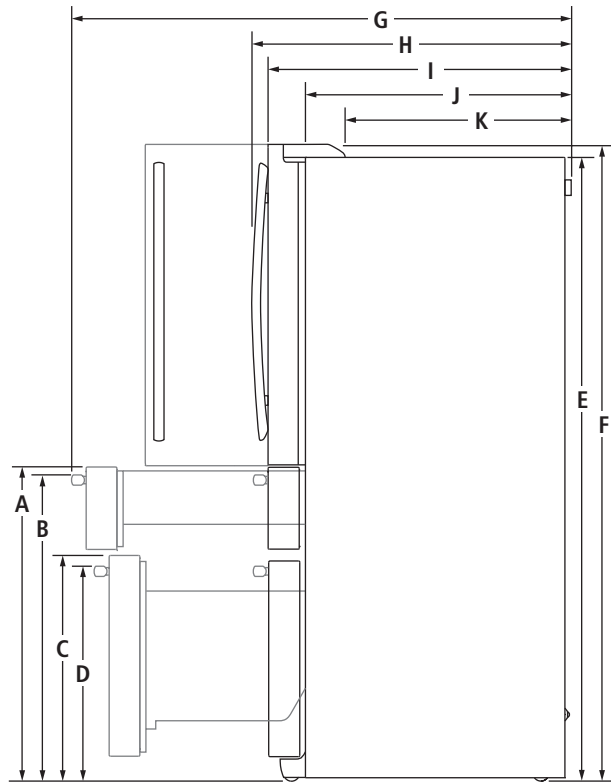


SIDE VIEW

MODEL #		JFX2897DR	
		in	cm
A	Height to top of upper drawer (min.)	34 ¹¹ / ₁₆	88.1
B	Height to top of upper drawer handle (min.)		
	Pro-Style® Stainless	33 ⁹ / ₁₆	85.2
	Euro-Style Stainless	33 ¹ / ₂	85.0
C	Height to top of lower drawer (min.)	24 ³ / ₄	62.8
D	Height to top of lower drawer handle (min.)		
	Pro-Style® Stainless	23 ⁵ / ₈	60.0
	Euro-Style Stainless	23 ³ / ₈	59.5
E	Height of recessed refrigerator (min.)	68 ¹¹ / ₁₆	174.4
F	Height to top of doors (min.)	70 ¹ / ₈	178.1
G	Depth with upper drawer fully open including drawer handle (min.)		
	Pro-Style® Stainless	56 ⁷ / ₁₆	143.4
	Euro-Style Stainless	54 ³ / ₄	139.1
H	Depth with handles (min.)		
	Pro-Style® Stainless	36	91.4
	Euro-Style Stainless	35 ⁷ / ₁₆	90.0
I	Depth with doors (min.)	33 ³ / ₄	85.7
J	Depth without doors (min.)	29 ⁵ / ₈	75.2
K	Depth to back of hinges (min.)	24 ¹³ / ₁₆	63.0


IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

69" STANDARD-DEPTH FRENCH DOOR REFRIGERATOR WITH ICE & WATER DISPENSER
JFX2897DR – 35⁵/₈" x 70¹/₈" x 35⁷/₁₆"

OPENING/CLEARANCE DIMENSIONS

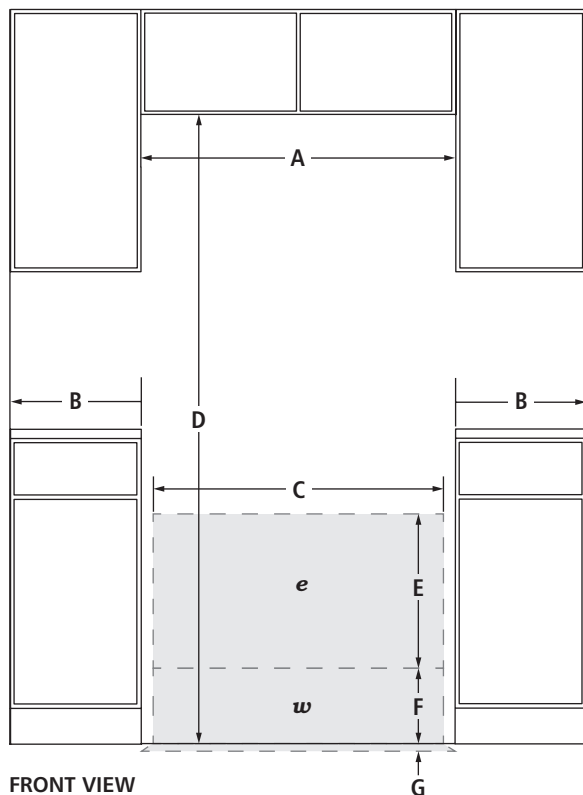

FRONT VIEW

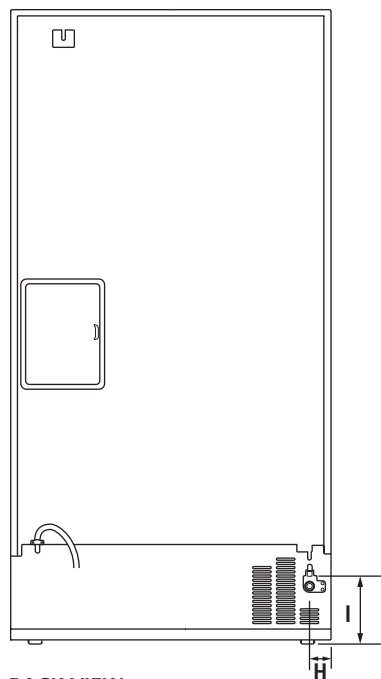

BACK VIEW

MODEL #		JFX2897DR	
		in	cm
A	Width (min.)	36 ⁷ / ₈	93.7
B	Minimum width from side of refrigerator to fixed wall – door open 90° (full access to remove bins)	2 ¹ / ₄	5.7
	Minimum width from side of refrigerator to fixed wall – door fully open 140°	13 ³ / ₄	34.8
C	Width of recommended electrical/ water installation area	34	86.4
D	Height (min.)	70 ¹ / ₈	178.0
E	Height of recommended electrical installation area (min.-max.)	10-24	25.4-61.0
F	Height of recommended water installation area	10	25.4
G	Depth of recommended water installation area	1	2.5
H	Water line location – distance from side	2 ¹ / ₂	6.3
I	Water line location – distance from bottom	7 ³ / ₈	18.7
e	Recommended electrical connection location		
w	Recommended water connection location		

ELECTRICAL REQUIREMENTS

115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch.

Minimum length of power cord is 60" (152.0 cm). Do not use an extension cord.

WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

Reverse Osmosis Water Supply

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

If a reverse osmosis water filtration system is connected to the cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.