


36" PRO-STYLE® DUAL-FUEL RANGES


JDRP536WP, JDRP436WP – 35<sup>7</sup>/<sub>8</sub>" x 36<sup>3</sup>/<sub>4</sub>" x 29<sup>1</sup>/<sub>4</sub>"

PRODUCT DIMENSIONS

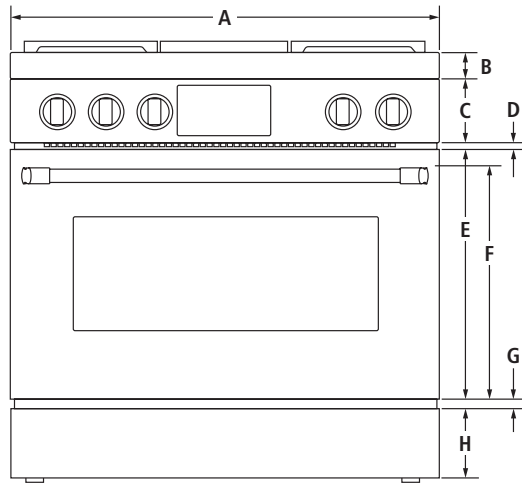

FRONT VIEW

MODEL #	JDRP536WP JDRP436WP	
	in	cm
A Overall width	35 <sup>7</sup> / <sub>8</sub>	91.1
B Height of bullnose	2 <sup>1</sup> / <sub>4</sub>	5.5
C Height of control panel	5 <sup>3</sup> / <sub>8</sub>	13.5
D Space between door and control panel	<sup>7</sup> / <sub>8</sub>	2.0
E Height of door	20 <sup>3</sup> / <sub>4</sub>	52.5
F Height to top of handle	19 <sup>3</sup> / <sub>8</sub>	49.0
G Space between door and lower panel	1	2.5
H Height of lower panel	5 <sup>1</sup> / <sub>2</sub>	14.0
I Depth with control panel overhang	27 <sup>3</sup> / <sub>8</sub>	69.5
J Depth with handle	29 <sup>1</sup> / <sub>4</sub>	74.2
K Depth with door fully open	45 <sup>3</sup> / <sub>4</sub>	116.2

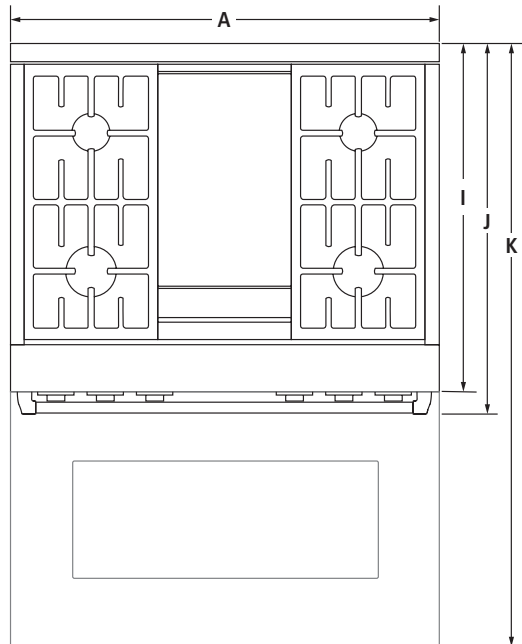


TOP VIEW

36" PRO-STYLE® DUAL-FUEL RANGES

JDRP536WP, JDRP436WP – 35<sup>7</sup>/<sub>8</sub>" x 36<sup>3</sup>/<sub>4</sub>" x 29<sup>1</sup>/<sub>4</sub>"

DIMENSIONS AS INSTALLED

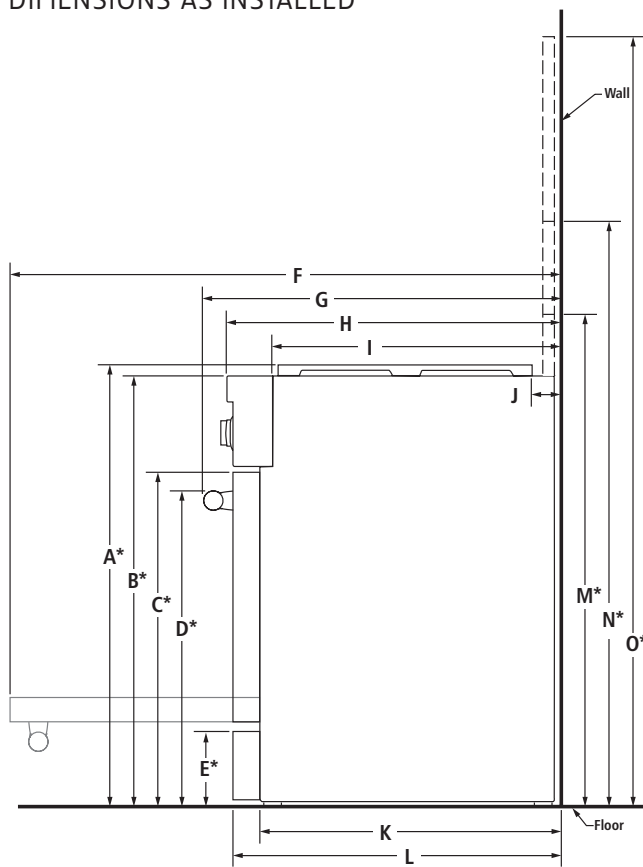

SIDE VIEW


MODEL #		JDRP536WP		JDRP436WP	
		in	cm		
A*	Height to top of grates (min.)	36 <sup>3</sup> / <sub>4</sub>	93.3		
B*	Height to top of cooking surface (min.)	35 <sup>3</sup> / <sub>4</sub>	90.8		
C*	Height to top of door (min.)	27 <sup>3</sup> / <sub>8</sub>	69.5		
D*	Height to top of handle (min.)	25 <sup>7</sup> / <sub>8</sub>	65.7		
E*	Height to top of lower panel (min.)	5 <sup>7</sup> / <sub>8</sub>	14.9		
F	Depth with door fully open	45 <sup>3</sup> / <sub>4</sub>	116.2		
G	Depth with handle	29 <sup>1</sup> / <sub>4</sub>	74.2		
H	Depth with control panel overhang	27 <sup>3</sup> / <sub>8</sub>	69.5		
I	Depth without control panel	23 <sup>1</sup> / <sub>2</sub>	59.5		
J	Depth between grates and wall	1 <sup>3</sup> / <sub>4</sub>	4.5		
K	Depth without door	24 <sup>5</sup> / <sub>8</sub>	62.5		
L	Depth with door	26 <sup>3</sup> / <sub>4</sub>	68.0		
<b>OPTIONAL ACCESSORIES</b>					
M*	Height to top of 9" stainless steel backsplash (min.)	44 <sup>3</sup> / <sub>4</sub>	113.7		
N*	Height to top of adjustable stainless steel backsplash (min.)	55 <sup>1</sup> / <sub>2</sub>	141.0		
O*	Height to top of adjustable stainless steel backsplash (max.)	74 <sup>3</sup> / <sub>4</sub>	189.9		

\*Add 1<sup>3</sup>/<sub>4</sub>" (4.4 cm) to the height dimension when leveling legs are fully extended.


36" PRO-STYLE® DUAL-FUEL RANGES

JDRP536WP, JDRP436WP – 35<sup>7</sup>/<sub>8</sub>" x 36<sup>3</sup>/<sub>4</sub>" x 29<sup>1</sup>/<sub>4</sub>"


OPENING/CLEARANCE DIMENSIONS

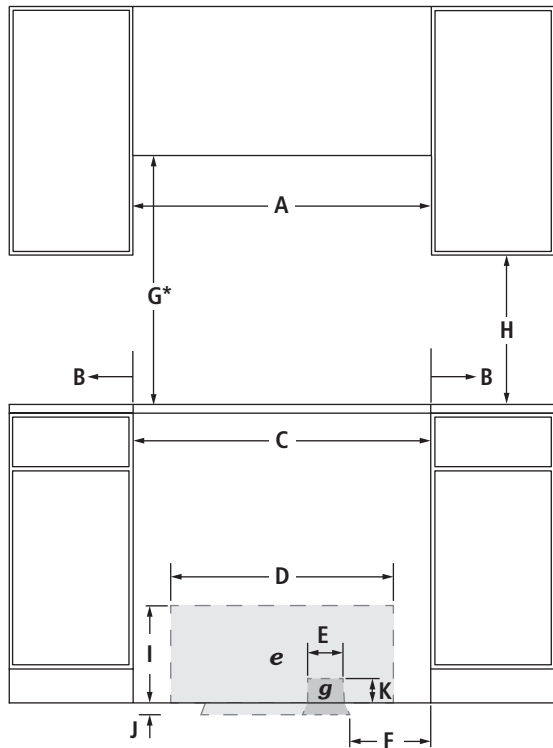

FRONT VIEW

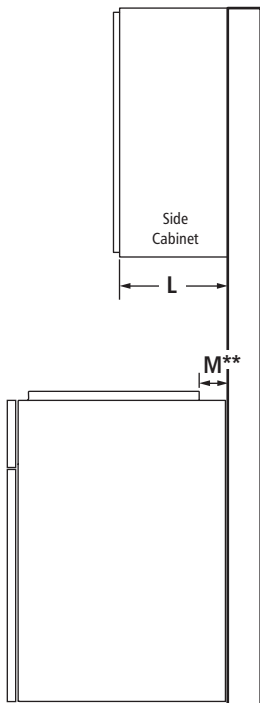

SIDE VIEW

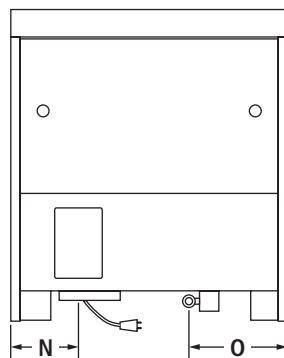

BACK VIEW

MODEL #		JDRP536WP	
		JDRP436WP	
		in	cm
A	Width of combustable area above cooking surface (min.)	36	91.4
B	Width from range to fixed wall or other combustable material (min.)	6	15.2
C	Width of opening (min.)	36 <sup>1</sup> / <sub>4</sub>	92.1
D	Width of electrical installation area	28	71.1
E	Width of gas installation area	14	35.5
F	Width from side cabinet to gas installation area	6	15.2
G*	Height to bottom of uncovered wood or metal cabinet above cooking surface (min.)	42	106.7
H	Height to bottom of uncovered wood or metal cabinet (min.)	18	45.7
I	Height of electrical installation area	15	38.1
J	Depth of electrical and gas installation area	5	12.7
K	Height of gas installation area	3	7.6
L	Depth of upper cabinet (max.)	13	33.0
M**	Depth to wall (min.)	6	15.2
N	Width to electrical conduit	9 <sup>1</sup> / <sub>8</sub>	23.0
O	Width to gas inlet	14 <sup>3</sup> / <sub>8</sub>	36.5
e	Recommended electrical access location		
g	Recommended gas supply line location		

\*Dimension can be reduced by 6" (15.2 cm) when bottom of wood or metal cabinet is covered by not less than 1/4" (0.6 cm) flame retardant millboard covered with not less than No. 28 MSG sheet metal, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

If installing a hood or hood liner above the range, follow the hood or hood liner instructions for dimensional clearances above the cooking surface.

\*\*If back wall is constructed of a combustable material and a backsplash is not installed, a 6" (15.2 cm) minimum clearance is required.

**ELECTRICAL REQUIREMENTS**

240 volt, 60 Hz, AC only, 40-amp fused, grounded circuit is required. A dedicated circuit is recommended. A UL listed 40-amp power supply cord kit.

# JENN-AIR® DETAILED PLANNING DIMENSIONS

## VENTILATION SELECTION CHART – RANGETOPS AND RANGES

MODEL #	PRO-STYLE™ HOODS			EURO-STYLE ISLAND-MOUNT HOODS		EURO-STYLE WALL-MOUNT HOODS		GLASS COLLECTION ISLAND-MOUNT HOOD	GLASS COLLECTION WALL-MOUNT HOODS		PERIMETRIC HOOD	OILED BRONZE WALL-MOUNT HOODS		EURO-STYLE TELESCOPING DOWNDRAFT SYSTEMS	CUSTOM HOOD LINERS		OVER-THE-RANGE MICROWAVE OVENS
	JXW9048WP	JXW9036WP JXU9136WP	JXW9030WP JXU9130WP	JXI8042WS	JXI8036WS	JXW8036WS JXW8836WS	JXW8030WS	JXI5036WS	JXW5036WS	JXW5030WS	JXP5032WS	JXW6036WR	JXW6030WR	JXD7036YS JXD7030YS	1200 or 600 CFMA	600 CFMB	JMV9186W JMV8208W
<b>PRO-STYLE® RANGETOPS</b>																	
<b>48-INCH (more than 60,000 BTU total)</b>																	
JGCP548WP – 6 Burners & Griddle	★	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—
<b>36-INCH (less than 60,000 BTU total)</b>																	
JGCP536WP – 4 Burners & Griddle	★	★	—	■	■	■	—	■	■	—	■	■	—	—	★	★	—
<b>36-INCH (more than 60,000 BTU total)</b>																	
JGCP436WP – 6 Burners	★	★	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—
<b>30-INCH (less than 60,000 BTU total)</b>																	
JGCP430WP – 4 Burners	■	★	★	■	■	■	■	■	■	■	■	■	■	—	★	★	—
<b>48-INCH (less than 60,000 BTU total)</b>																	
JGD8348CDP – 4 Burners & Grill Assembly	—	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—
<b>PRO-STYLE® DUAL-FUEL AND GAS RANGES</b>																	
<b>48-INCH (more than 60,000 BTU total)</b>																	
JDRP548WP – 6 Burners & Griddle	★	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—
JGRP548WP – 6 Burners & Griddle	★	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—
<b>36-INCH (less than 60,000 BTU total)</b>																	
JDRP536WP – 4 Burners & Griddle	★	★	—	■	■	■	—	■	■	—	■	■	—	—	★	★	—
JGRP536WP – 4 Burners & Griddle	★	★	—	■	■	■	—	■	■	—	■	■	—	—	★	★	—
<b>36-INCH (more than 60,000 BTU total)</b>																	
JDRP436WP – 6 Burners	★	★	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—
JGRP436WP – 6 Burners	★	★	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—
<b>30-INCH (less than 60,000 BTU total)</b>																	
JDRP430WP – 4 Burners	—	★	★	—	■	■	■	■	■	■	■	■	■	—	★	★	—
JGRP430WP – 4 Burners	—	★	★	—	■	■	■	■	■	■	■	■	■	—	★	★	—
<b>SLIDE-IN RANGES</b>																	
<b>Dual-Fuel and Gas Conventional (less than 60,000 BTU total)</b>																	
JDS886BDP – 4 Burners	■	★	★	■	★	★	★	★	★	★	★	■	■	—	★	★	■
JDS8850CD – 4 Burners	■	■	■	■	★	★	★	★	★	★	★	■	■	—	★	★	■
JGS8860BDP – 4 Burners	■	★	★	■	★	★	★	★	★	★	★	■	■	—	★	★	■
JGS8850CD – 4 Burners	■	■	■	■	★	★	★	★	★	★	★	★	★	—	★	★	■
<b>ELECTRIC CONVENTIONAL</b>																	
JES8850CA – 5 Elements	■	■	■	■	★	★	★	★	★	★	★	■	■	—	★	★	■

A. Custom hood liners can be used with any of the following blower motors: UXB1200DYS, UXB0600DYS, UXI1200DYS or UXI0600DYS.  
 B. Blower motor UXB0600DYS is rated for up to 65,000 BTUs and can be used with the rangetops and ranges indicated.

KEY	
★	Style and Performance Pair
■	Performance Pair
—	Not Recommended

