T36BB820SS

36-INCH PRE-ASSEMBLED 2-DOOR BOTTOM FREEZER WITH PROFESSIONAL HANDLES



FREEDOM® COLLECTION







Also Available: T36BB810SS with Masterpiece® Handles

FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- Full-height door-true cabinet integration without exposed venting grille
- All-LED sidewall and theater lighting
- Brightspace interior design
- Flat stainless steel panel kit door panel kit, pre-assembled

TEMPERATURE RANGES	
Refrigeration	35°F (2°C) to 46°F (8°C)
Temperature Controlled Drawer	Fish 32°F (0°C) Meat 35°F (1.5°C) Produce 37°F (3°C)
Deli Drawer	Just above 32°F (0°C)
SuperCool	35.5°F (2°C) for approximately 9 hours
Energy Saving (Economy) Mode	Refrigerator: 45°F (7°C) Freezer: 3°F (-16°C)
Freezer	-9°F (-23°C) to 7°F (-14°C)
SuperFreeze®	-9°F (-23°C) for approximately 52 hours

ACCESSORIES (OPTIONAL)	
HEATRKIT10 - Freedom® Heater Kit	
Filters: REPLFLTR10 - Freedom® Water Filter SCRNFLTR10 - Filter By-Pass	

GENERAL PROPERTIES	
Reversible Door Swing	Yes
	All-LED Sidewall and
Lighting	Theater Lighting
Full Width Shelves - Refrigerator	3
Adjustable Shelves - Refrigerator	2
Shelf Material - Refrigerator	Glass Shelves w/Metal Trim
Full Extension Drawers at 90° Door Opening Angle	Yes
Humidity Control Drawer	Yes
Door Bins - Refrigerator	3
Gallon Door Bins	2
Defrost Process - Freezer	Frost-Free
Freezer Drawers	1
Ice Maker	Yes
Door Open Alarm	Yes
SuperCool	Yes
SuperFreeze®	Yes
Special Modes	Sabbath, Economy, Vacation
CAPACITY	
Total Unit Gross Capacity (cu. ft.) - AHAM	20 cu. ft.
Refrigerator Gross Capacity (cu. ft.)	14 cu. ft.
Freezer Gross Capacity (cu. ft.)	6 cu. ft.
1 3 , ,	
TECHNICAL DETAILS	
	588 W
TECHNICAL DETAILS	
TECHNICAL DETAILS Watts (W)	588 W
TECHNICAL DETAILS Watts (W) Current (A)	588 W 15 A
TECHNICAL DETAILS Watts (W) Current (A) Volts (V)	588 W 15 A 120 V
TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz)	588 W 15 A 120 V 60 Hz
TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.)	588 W 15 A 120 V 60 Hz 78 3/4"
TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type	588 W 15 A 120 V 60 Hz 78 3/4"
TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT	588 W 15 A 120 V 60 Hz 78 3/4 " 120V 3-Wire
TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.)	588 W 15 A 120 V 60 Hz 78 3/4" 120V 3-Wire 84" x 35 3/4" x 24 3/4"
TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.)	588 W 15 A 120 V 60 Hz 78 3/4" 120V 3-Wire 84" x 35 3/4" x 24 3/4" 84" x 36" x 24" or 25"
TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net / Gross Weight (lbs)	588 W 15 A 120 V 60 Hz 78 3/4" 120V 3-Wire 84" x 35 3/4" x 24 3/4" 84" x 36" x 24" or 25"
TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net / Gross Weight (lbs) EFFICIENCY	588 W 15 A 120 V 60 Hz 78 3/4" 120V 3-Wire 84" x 35 3/4" x 24 3/4" 84" x 36" x 24" or 25" 526 / 573 lbs
TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net / Gross Weight (lbs) EFFICIENCY ENERGY STAR® Qualified	588 W 15 A 120 V 60 Hz 78 3/4" 120V 3-Wire 84" x 35 3/4" x 24 3/4" 84" x 36" x 24" or 25" 526 / 573 lbs
TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net / Gross Weight (lbs) EFFICIENCY ENERGY STAR® Qualified Annual Energy Consumption	588 W 15 A 120 V 60 Hz 78 3/4" 120V 3-Wire 84" x 35 3/4" x 24 3/4" 84" x 36" x 24" or 25" 526 / 573 lbs
TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net / Gross Weight (lbs) EFFICIENCY ENERGY STAR® Qualified Annual Energy Consumption WARRANTY Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because	588 W 15 A 120 V 60 Hz 78 3/4" 120V 3-Wire 84" x 35 3/4" x 24 3/4" 84" x 36" x 24" or 25" 526 / 573 lbs Yes 591 kWh
TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net / Gross Weight (lbs) EFFICIENCY ENERGY STAR® Qualified Annual Energy Consumption WARRANTY Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect Limited Warranty for Sealed Refrigeration	588 W 15 A 120 V 60 Hz 78 3/4" 120V 3-Wire 84" x 35 3/4" x 24 3/4" 84" x 36" x 24" or 25" 526 / 573 lbs Yes 591 kWh

 $^{^{\}star}$ Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing


T36BB820SS

36-INCH PRE-ASSEMBLED 2-DOOR BOTTOM FREEZER WITH PROFESSIONAL HANDLES




FREEDOM® COLLECTION

CUTOUT DIMENSIONS

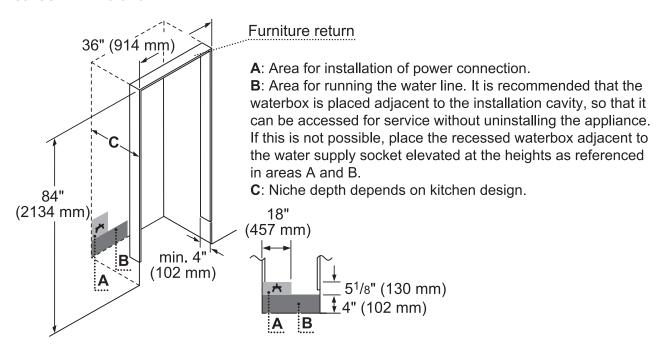

TOP VIEW CLEARANCE

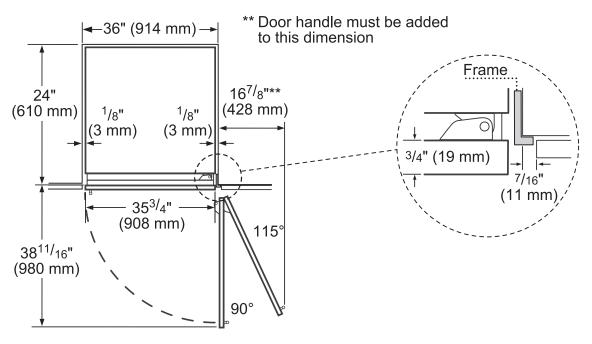


T36BB820SS

36-INCH PRE-ASSEMBLED 2-DOOR BOTTOM FREEZER WITH PROFESSIONAL HANDLES



FREEDOM® COLLECTION

PANEL DIMENSIONS

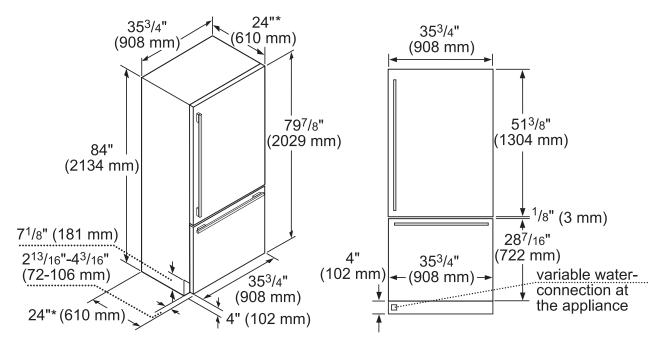

*Excludes thickness of door panel. If standard panel with 3/4" thickness is mounted, total depth is 24 3/4".

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.