PH54GS 27-INCH DEPTH WALL HOOD (54-INCH WIDTH)

PROFESSIONAL SERIES









42-inch model PH42GS shown

FEATURES & BENEFITS

- Three fan speeds
- Auto function senses heat from the cooking surface and adjusts fan speeds
- Powerfully Quiet ventilation systems
- Extended capture area ensures removal of smoke and odor
- Built-in 'Clean Filter' reminder light illuminates after 40 hours of operation
- 27" depth hood is a perfect companion to the Pro Grand Professional Range

ACCESSORIES (OPTIONAL)

25 ft. Blower Connector Cable - EXTNCB25

For use with the following Inline and Remote Blowers: VTR630D, VTR1030D, VTR1330E, VTI610D, VTI1010D

Roofplates

RFPLT600 - For use with 600 CFM Remote Blower VTR630D

RFPLT1000 - For use with 1000 CFM Remote Blower VTR1030D and 1300 CFM Blower VTR1330E

Roof Jack	RJ310
Wall Cap	WC10


GENERAL PROPERTIES	
Operating Mode	Ducted
Maximum CFM	N/A
Number of Speed Settings	3-Stage
Motor Location	Blower (Sold Separately)
Number Of Lights	4
Bulb Type	20 W - G9 Base
Total Power Of The Lamps (W)	80 W
Damper Included	Yes
Grease Filter Material	Washable Stainless Steel
Grease Filter Type	Commercial-Style Baffle
TECHNICAL DETAILS	
Watts (W)	N/A
	N/A 15; 20 A
Watts (W)	1 77 1
Watts (W) Current (A)	15; 20 A
Watts (W) Current (A) Volts (V)	15; 20 A 120 V
Watts (W) Current (A) Volts (V) Frequency (Hz)	15; 20 A 120 V 60 HZ
Watts (W) Current (A) Volts (V) Frequency (Hz) Plug Type	15; 20 A 120 V 60 HZ
Watts (W) Current (A) Volts (V) Frequency (Hz) Plug Type DIMENSIONS & WEIGHT Overall Appliance Dimensions (Width Of	15; 20 A 120 V 60 HZ 120V-3 Prong
Watts (W) Current (A) Volts (V) Frequency (Hz) Plug Type DIMENSIONS & WEIGHT Overall Appliance Dimensions (Width Of Canopy Included) (HxWxD) (in) Required Distance Above Cooktop / Range	15; 20 A 120 V 60 HZ 120V-3 Prong
Watts (W) Current (A) Volts (V) Frequency (Hz) Plug Type DIMENSIONS & WEIGHT Overall Appliance Dimensions (Width Of Canopy Included) (HxWxD) (in) Required Distance Above Cooktop / Range Cooking Surface	15; 20 A 120 V 60 HZ 120V-3 Prong 18" x 54" x 27" 30" / 30"
Watts (W) Current (A) Volts (V) Frequency (Hz) Plug Type DIMENSIONS & WEIGHT Overall Appliance Dimensions (Width Of Canopy Included) (HxWxD) (in) Required Distance Above Cooktop / Range Cooking Surface Diameter of Air Duct (in) Top	15; 20 A 120 V 60 HZ 120V-3 Prong 18" x 54" x 27" 30" / 30"

Blower (Sold Separately)

blower (30ld Separately)		
BLOWER OPTIONS		
Remote Blower (Mounted to Roof or External Wall)	VTR630D - 600 CFM	
	VTR1030D - 1000 CFM	
	VTR1330E - 1300 CFM	
Inline Blower (Mounted Between Kitchen and External Wall)	VTI610D - 600 CFM	
	VTI1010D - 1000 CFM	
Integrated Blower (Mounted in Hood)	VTN630N - 600 CFM	
	VTN1030N - 1000 CFM	
WARRANTY		
Limited Warranty Parts And Labor	2 Year	

PH54GS 27-INCH DEPTH WALL HOOD (54-INCH WIDTH) PROFESSIONAL SERIES



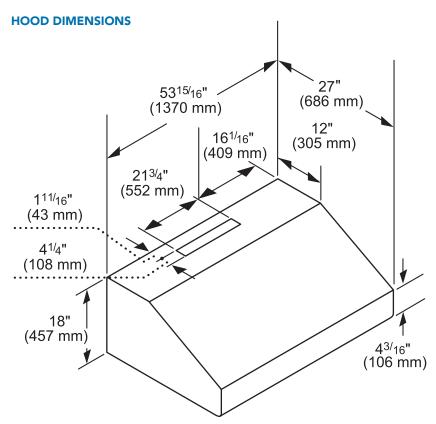


measurements in inches and mm

PH54GS 27-INCH DEPTH WALL HOOD (54-INCH WIDTH) PROFESSIONAL SERIES




REMOTE BLOWERS (MOUNTED TO ROOF OR EXTERNAL WALL)

VTR630D-600 CFM




VTR1030D-1000 CFM



measurements in inches and mm

VTR1330E-1300 CFM




measurements in inches and mm




INLINE BLOWERS (MOUNTED BETWEEN KITCHEN AND EXTERNAL WALL)

VTI610D-600 CFM




measurements in inches and mm

VTI1010D-1000 CFM




measurements in inches and mm

INTEGRATED BLOWERS (MOUNTED IN HOOD)



measurements in inches and mm

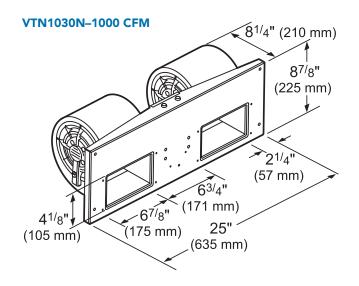


PH54GS 27-INCH DEPTH WALL HOOD (54-INCH WIDTH)




REMOTE BLOWER ACCESSORIES

ROOFPLATE RFPLT600



ROOFPLATE RFPLT1000




EXTNCB25


25 ft. Blower Connector Cable for use with the following Inline and Remote blowers: VTR630D, VTR1030D, VTR1330E, VTI610D, VTI1010D

ROOF JACK & TRANSITION


ROOF JACK-RJ310



TRANSITION



WALL CAPS

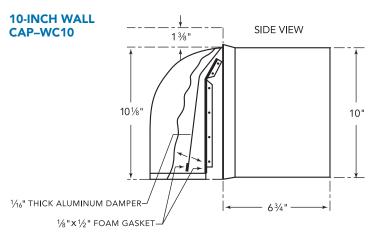

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.