

# 54" Professional Series 27" Deep Wall Hood PH54GS



## PH54GS Stainless steel

### Performance

- Three fan speeds
- Auto function senses heat from the cooking surface and adjusts fan speeds
- Powerfully quiet ventilation systems
- Extended capture area ensures removal of smoke and odor
- Built-in 'Clean Filter' reminder light illuminates after 40 hours of operation
- Delayed shut off tackles lingering odors for up to 10 minutes
- Dimmer lighting - for a soft lighting effect
- Two Infrared Keep-Hot Lamps hold food warm until serving time
- Dishwasher safe stainless steel baffle filters
- Dishwasher safe grease collection trays are easily removed
- Filter systems are highly efficient at capturing grease
- Vertical or horizontal ducting direction
- Seven different blowers to choose from the line up according to cooking needs
- Choose from Inline, Remote or Integrated Blowers
- Blowers sold separately
- Hood includes filters, backdraft damper and transition
- Approved by CSA/UL for damp environments

### Design


- 27" depth hood is a perfect companion to the Pro Grand professional range
- Chiseled design for a seamless integration into any kitchen
- Brushed stainless steel finish
- Halogen lighting spotlights your best recipes
- Easy to view recessed control panel with stainless steel buttons
- Stainless steel professional style baffle filters

### Optional accessories

RFPLT600 Roof mounting plate for VTR630D

825225899495

# 54" Professional Series 27" Deep Wall Hood PH54GS

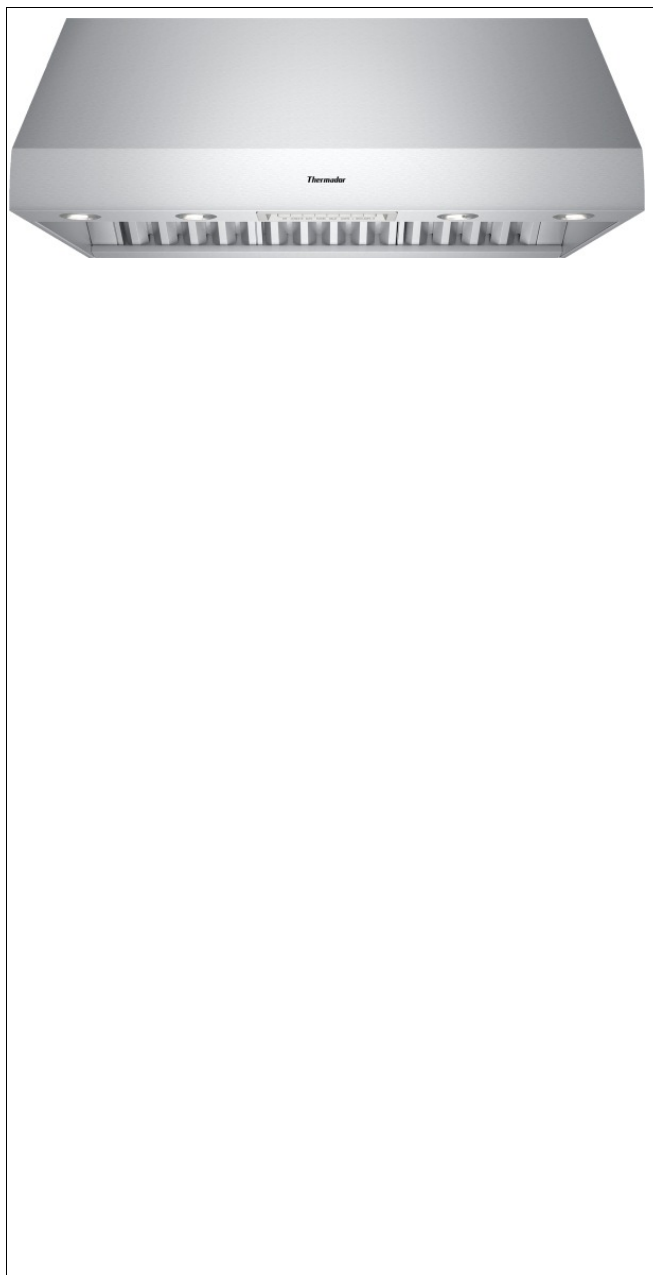

## Product Features

Operating Mode: Ducted  
Number of speed settings: 3-stage  
Delay Shut off modes: 10  
Required accessories: Blower  
Optional accessories: KHS54QS, RFPLT600, RJ310, WC10  
Number of lights: 4  
Type of lamps used: infra-red  
Total power of the lamps (W): 40

## Consumption and connection features

UPC code: 825225899495  
Material: Stainless steel  
Watts (W):  
Current (A): 15; 20  
Volts (V): 120  
Frequency (Hz): 60  
Approval certificates: CSA  
Power cord length (in):  
Power cord length (cm): 150.0  
Plug type: 120V-3 prong  
Overall appliance dimensions (HxWxD) (in): 18" / x 54" x 27"  
Overall appliance dimensions (HxWxD) (mm): 457MM x 1370 x 686  
Product packaging dimensions (HxWxD) (in): 31.99 x 22.24 x 57.99  
Adjustable feet:  
Height of the chimney (in):  
Height of the chimney (mm):  
Vertical rise height:  
Required distance above cooktop/ranges: 36"/36"  
Net weight (lbs): 111  
Net weight (kg): 51.000  
Gross weight (lbs): 125  
Gross weight (kg): 57.000  
Motor location:  
Maximum CFM:  
Diameter of air duct (in) top: 10  
Diameter of air duct (in) back: 10  
Discharge direction:  
No-return airflow flap: No

2013-07-12