# T18IF800SP 18-INCH FLUSH FREEZER COLUMN WITH INTERNAL **ICE MAKER**



#### FREEDOM® COLLECTION, PANEL-READY, REVERSIBLE DOOR SWING







### **FEATURES & BENEFITS**

- Freedom® Hinge enables true flush design
- Full-height door-true cabinet integration without exposed venting grille
- All-LED sidewall and theater lighting
- Brightspace interior design
- Accepts custom or stainless steel panels

TEMPERATURE RANGES	
Freezer	-9°F (-23°C) to 7°F (-14°C)
SuperFreeze®	-9°F (-23°C) for approximately 52 hours
Energy Saving (Economy) Mode	3°F (-16°C)

ACCESSORIES (OPTIONAL)
Stainless Steel Panel Options: TFL18IR800 - Flat Stainless Steel Panel TCH18IR800 - Chiseled Stainless Steel Panel
Handle Options: PR36HNDL10 - 36-Inch Professional MS36HNDL10 - 36-Inch Masterpiece®
FRAMEKIT10 - Freedom® Frame Kit
HEATRKIT10 - Freedom® Heater Kit
Filters: REPLFLTR10 - Freedom® Water Filter SCRNFLTR10 - Filter By-Pass

GENERAL PROPERTIES		
Panel Ready	Yes	
Reversible Door Swing	Yes	
Lighting	All-LED Sidewall and Theater Lighting	
Full Width Shelves	3	
Adjustable Shelves	3	
Shelf Material	Metal	
Full Extension Drawers at 90° Door Opening Angle	Yes	
Door Bins	5	
Ice Maker	Yes	
Door Open Alarm	Yes	
Special Modes	Sabbath, Economy, Vacation	
CAPACITY		
Total Unit Gross Capacity (cu. ft.) - AHAM	8.6 cu. ft.	
Freezer Gross Capacity (cu. ft.)	8.6 cu. ft.	
PERFORMANCE		
Dedicated Evaporator & Compressor System	Yes	
SuperFreeze®	Yes	
Defrost Process	Frost-Free	
TECHNICAL DETAILS		
Watts (W)	367 W	
Current (A)	15 A	
Volts (V), Frequency (Hz)	120 V, 60 Hz	
Power Cord Length (in.)	78 <b>3/4</b> "	
Plug Type	120V-3 Prong	
DIMENSIONS & WEIGHT		
Appliance Dimensions (H $\times$ W $\times$ D) (in.)	84" × 17 <b>3/4</b> " × 24"	
Required Cutout Size (H $\times$ W $\times$ D) (in.)	84" x 18" x 24 <b>3/4</b> "	
Net Weight (lbs)	261 lbs	
EFFICIENCY		
ENERGY STAR® Qualified	Yes	
Annual Energy Consumption	443 kWh	
WARRANTY		
Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year	
Limited Warranty for Sealed Refrigeration System*; Parts And Labor	3rd to 6th Year	
-		
Limited Warranty for Sealed Refrigeration System*; Parts Only	7th to 12th Year	

 $<sup>^{\</sup>star}$  Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing


## T18IF800SP

# 18-INCH FLUSH FREEZER COLUMN WITH INTERNAL ICE MAKER



FREEDOM® COLLECTION, PANEL-READY, REVERSIBLE DOOR SWING

#### **CUTOUT DIMENSIONS**




#### Furniture return


- A: Area for installation of power connection.
- **B**: Area for running the water line. It is recommended that the waterbox is placed adjacent to the installation cavity, so that it can be accessed for service without uninstalling the appliance. If this is not possible, place the recessed waterbox adjacent to the water supply socket elevated at the heights as referenced
- C: Niche depth depends on kitchen design. For a flush installation, the depth needs to be at least 24 inches plus the thickness of the door panel.

Stainless steel models contain a panel-ready base unit, ready-toinstall Stainless Steel door(s) with a right or left door swing and handle(s).

#### **TOP VIEW CLEARANCE**



- \*\* Door handle must be added to this dimension
- \* Depends on the thickness of the furniture door. 3/4" (19 mm) is relevant for the stainless stéel door. (special Accessory).




## T18IF800SP

# 18-INCH FLUSH FREEZER COLUMN WITH INTERNAL ICE MAKER



FREEDOM® COLLECTION, PANEL-READY, REVERSIBLE DOOR SWING

#### **PANEL DIMENSIONS**

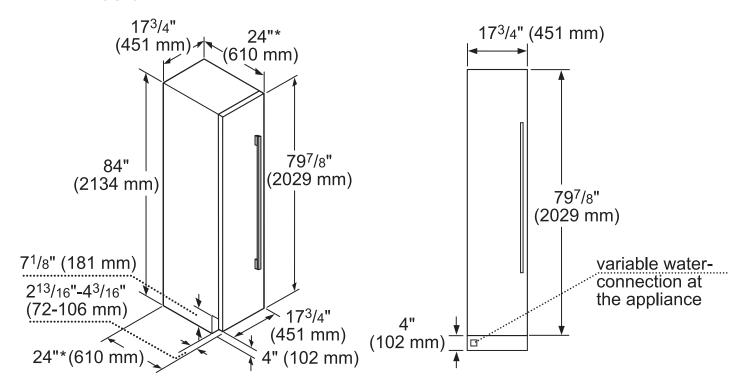

\*Excludes thickness of door panel. If standard panel with 3/4" thickness is mounted, total depth is 24 3/4".

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.