T24IW900SP

24-INCH BUILT-IN WINE PRESERVATION COLUMN

FREEDOM® COLLECTION, PANEL-READY











FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Three Independent Temperature Zones for your complete collection
- Luxuries smooth cantilever shelves for your true wine reserve needs
- Smooth Filtered Lighting for clear and easy viewing of all product
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

GENERAL PROPERTIES	
Panel Ready	Yes
Reversible Door Swing	Yes
Lighting	New Bar ALL LED Sidewall and Theater Lighting
Number of Shelves	11
Shelf Material	Wenge Wood / Aluminum Frame
Full Extension Drawers @ 115° Door Opening Angle	Yes
Full Extension Drawers @ 90° Door Opening Angle	Yes
Presenter Shelf	Yes
Portable Aluminum Wine Presenter	Yes
Type of Glass Door	Tempered and UV-protective
Number of Temperature Zones	3
Door Open Alarms	Yes
Open Door Assist	Yes
Special Modes	Sabbath, Economy, Vacation
CAPACITY	
Bottle Capacity (750 ml)	98
TEMPERATURE RANGES	
Zone 1 (Upper Zone)	
Zone i (opper Zone)	41°F (5°C) to 64°F (18°C)
Zone 2 (Middle Zone)	
	(18°C) 41°F (5°C) to 64°F
Zone 2 (Middle Zone)	(18°C) 41°F (5°C) to 64°F (18°C) 41°F (5°C) to 64°F
Zone 2 (Middle Zone) Zone 3 (Lower Zone)	(18°C) 41°F (5°C) to 64°F (18°C) 41°F (5°C) to 64°F
Zone 2 (Middle Zone) Zone 3 (Lower Zone) TECHNICAL DETAILS	(18°C) 41°F (5°C) to 64°F (18°C) 41°F (5°C) to 64°F (18°C)
Zone 2 (Middle Zone) Zone 3 (Lower Zone) TECHNICAL DETAILS Watts (W)	(18°C) 41°F (5°C) to 64°F (18°C) 41°F (5°C) to 64°F (18°C) 102 W
Zone 2 (Middle Zone) Zone 3 (Lower Zone) TECHNICAL DETAILS Watts (W) Current (A)	(18°C) 41°F (5°C) to 64°F (18°C) 41°F (5°C) to 64°F (18°C) 102 W 15 A
Zone 2 (Middle Zone) Zone 3 (Lower Zone) TECHNICAL DETAILS Watts (W) Current (A) Volts (V)	(18°C) 41°F (5°C) to 64°F (18°C) 41°F (5°C) to 64°F (18°C) 102 W 15 A 120V-3 Prong
Zone 2 (Middle Zone) Zone 3 (Lower Zone) TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz)	(18°C) 41°F (5°C) to 64°F (18°C) 41°F (5°C) to 64°F (18°C) 102 W 15 A 120V-3 Prong 60 Hz
Zone 2 (Middle Zone) Zone 3 (Lower Zone) TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.)	(18°C) 41°F (5°C) to 64°F (18°C) 41°F (5°C) to 64°F (18°C) 102 W 15 A 120V-3 Prong 60 Hz 139
Zone 2 (Middle Zone) Zone 3 (Lower Zone) TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type	(18°C) 41°F (5°C) to 64°F (18°C) 41°F (5°C) to 64°F (18°C) 102 W 15 A 120V-3 Prong 60 Hz 139
Zone 2 (Middle Zone) Zone 3 (Lower Zone) TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT	(18°C) 41°F (5°C) to 64°F (18°C) 41°F (5°C) to 64°F (18°C) 102 W 15 A 120V-3 Prong 60 Hz 139 120V-3 Prong
Zone 2 (Middle Zone) Zone 3 (Lower Zone) TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.)	(18°C) 41°F (5°C) to 64°F (18°C) 41°F (5°C) to 64°F (18°C) 102 W 15 A 120V-3 Prong 60 Hz 139 120V-3 Prong
Zone 2 (Middle Zone) Zone 3 (Lower Zone) TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.)	(18°C) 41°F (5°C) to 64°F (18°C) 41°F (5°C) to 64°F (18°C) 102 W 15 A 120V-3 Prong 60 Hz 139 120V-3 Prong 83 ³ / ₄ "* × 23 ³ / ₄ " × 24" 84" × 24" × 25"
Zone 2 (Middle Zone) Zone 3 (Lower Zone) TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net / Gross Weight (lbs)	(18°C) 41°F (5°C) to 64°F (18°C) 41°F (5°C) to 64°F (18°C) 102 W 15 A 120V-3 Prong 60 Hz 139 120V-3 Prong 83 ³ / ₄ "* × 23 ³ / ₄ " × 24" 84" × 24" × 25"

^{*}Height adjustable + / -1/2" (+ / -13 mm)

Page 1 of 3 10 / 17

T24IW900SP

24-INCH BUILT-IN WINE PRESERVATION COLUMN







WARRANTY	
Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year
Limited Warranty for Sealed Refrigeration System**; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System**; Parts Only	7th to 12th Year
Limited Warranty for Stainless Steel Rust-Through	Lifetime

^{**}Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing


CUTOUT DIMENSIONS

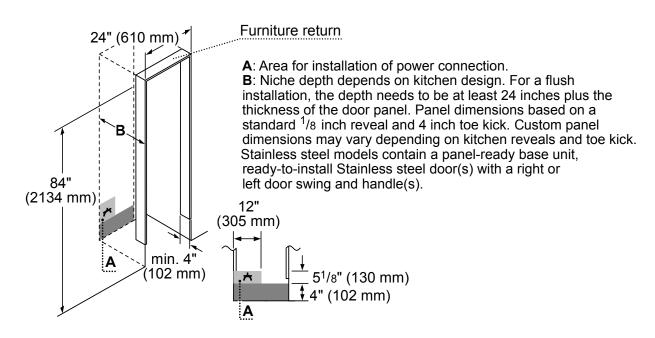

TOP VIEW CLEARANCE



- ** Door handle must be added to this dimension
- Depends on the thickness of the furniture door.
 3/4" (19 mm) is relevant for the stainless steel door. (special Accessory).



Page 2 of 3 10 / 17


T241W900SP

24-INCH BUILT-IN WINE PRESERVATION COLUMN

FREEDOM® COLLECTION, PANEL-READY



PANEL DIMENSIONS

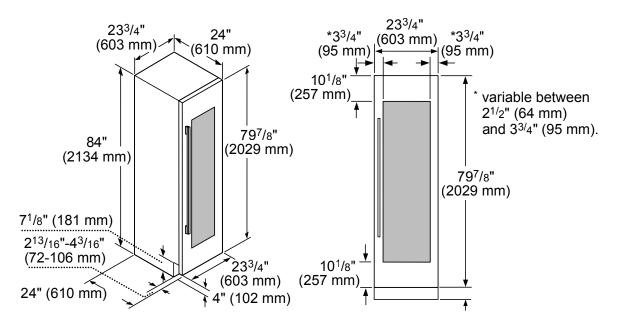

ACCESSORIES (OPTIONAL)

FLAT STAINLESS STEEL DOOR PANELS



TFL24IW800 24-Inch Flat Stainless Steel Door Panel

HANDLES

NOTE: Choose one handle for each column, choose 2 handles for each 2-door bottom freezer and choose 3 handles for each French Door bottom freezer.

PR36HNDL20 36-Inch Professional Series Handle

PR30HNDL20 30-Inch Professional Series Handle

MS36HNDL20 36-Inch Masterpiece® Series Handle MS30HNDL20

30-Inch Masterpiece® Series Handle

PR36HNDL10

36-Inch Professional Series Classic Handle PR30HNDL10

30-Inch Professional Series Classic Handle

MS36HNDL10

36-Inch Masterpiece® Series Classic Handle MS30HNDL10

30-Inch Masterpiece® Series Classic Handle

HEATRKIT10 AND HEATRKIT20 FREEDOM® HEATER KIT

For installations where two appliances are installed side-by-side or instances where any appliances are installed less than 6" apart from another but not connected. The heater kit is also recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall. HEATERKIT20 offers improved energy efficiency when compared to HEATERKIT10.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

18007354328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2017 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Page 3 of 3