



Bottom Mount Refrigerator

PRODUCT MODEL NUMBERS


GB2SHDXP
GB9SHDXP

Electrical: A 115 Volt, 60 Hz., AC only 15 or 20 ampere fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water line with water pressure between 30 and 120 psi (241-689 kPa) is required for the ice maker.


If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the system needs to be a minimum of approximately 60 psi (414 kPa).

OVERALL DIMENSIONS

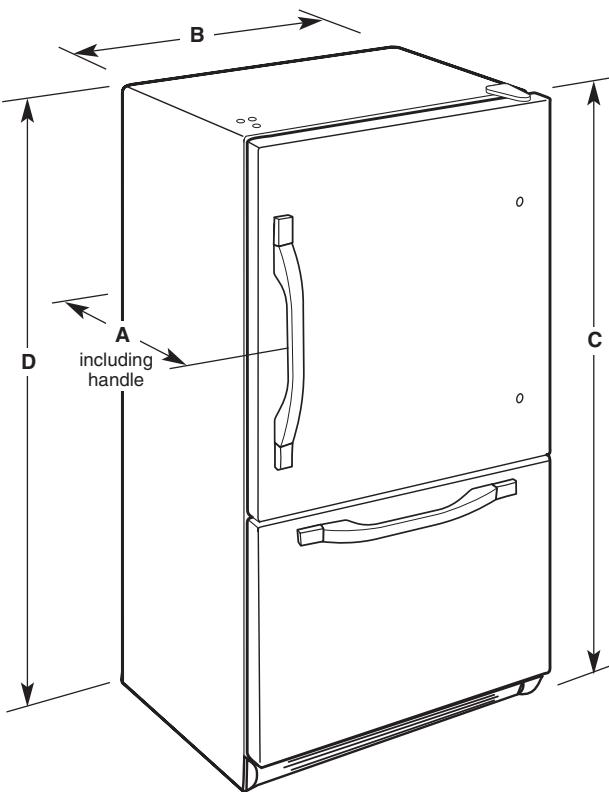

Model	Depth "A"	Width "B"	Height "C"	Cabinet Height "D"
GB9SHDXP	32 1/2"	29 5/8"	66 7/8"	65 5/8"
GB2SHDXP	32 1/2"	32 5/8"	69 7/8"	68 5/8"

LOCATION REQUIREMENTS

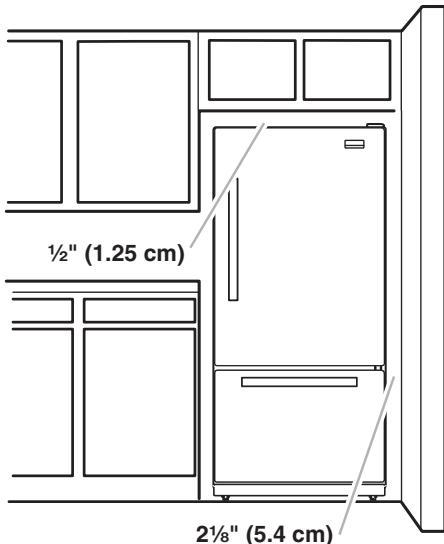

To ensure proper ventilation for your refrigerator, allow for 1/2" (1.25 cm) space at the top and behind the refrigerator for ease of installation.

When installing your refrigerator next to a fixed wall, leave 2-1/8" (5.4 cm) minimum on each side (depending on your model) to allow for the door to swing open.

If your refrigerator has an ice maker, allow extra space at the back for the water line connections.

NOTE: Do not install the refrigerator near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 55°F (13°C).