

Whirlpool® Side by Side Refrigerator

PRODUCT MODEL NUMBERS

GD5DHAXV GD5RVAXV
 GS5DHAXV GS5VHAXW
 GS5SVAXV

Electrical: A 115-Volt, 60-Hz, AC-only, 15- or 20- amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control, depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control, depending on the model) to the desired setting.

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker.

Important: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).


PRODUCT DIMENSIONS

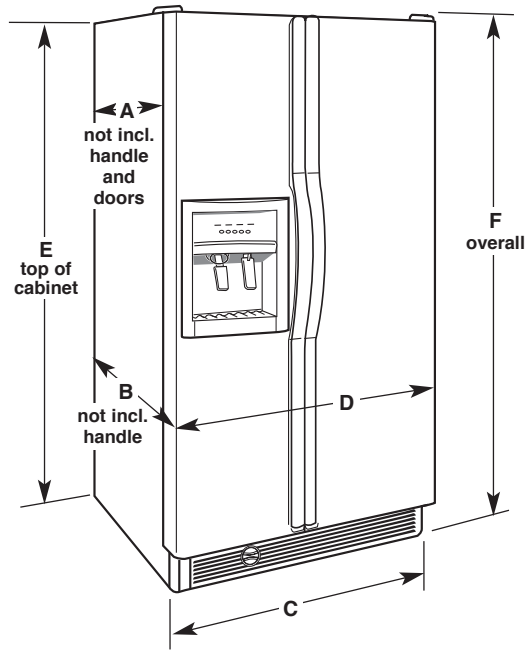

Dimensions "E" and "F" include rollers extended 3/4" (1.9 cm).

Model	Depth "A"	Depth "B"	Cab. Width "C"	Door Width "D"	Cab. Height "E"	Overall Height "F"
GD5DHAXV	27-1/2" (69.9 cm)	31-3/8" (79.7 cm)	35-1/2" (90.2 cm)	35-7/8" (91.1 cm)	68-7/8" (174.9 cm)	69-3/8" (176.2 cm)
GD5RVAXV	27-1/2" (69.9 cm)	31-3/8" (79.7 cm)	35-1/2" (90.2 cm)	35-7/8" (91.1 cm)	68-7/8" (174.9 cm)	69-3/8" (176.2 cm)
GS5DHAXV	27-1/2" (69.9 cm)	33-1/4" (84.5 cm)	35-1/2" (90.2 cm)	36" (91.4 cm)	68-7/8" (174.9 cm)	70-1/4" (178.4 cm)
GS5SVAXV	27-1/2" (69.9 cm)	33-1/4" (84.5 cm)	35-1/2" (90.2 cm)	36" (91.4 cm)	68-7/8" (174.9 cm)	70-1/4" (178.4 cm)
GS5VHAXW	27-1/2" (69.9 cm)	33-1/4" (84.5 cm)	35-1/2" (90.2 cm)	36" (91.4 cm)	68-7/8" (174.9 cm)	70-1/4" (178.4 cm)

LOCATION REQUIREMENTS

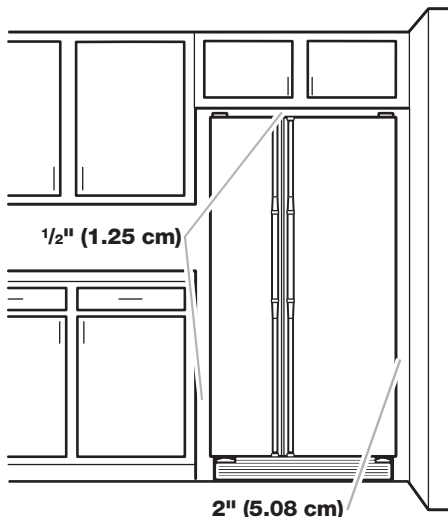

Normal minimum cabinet cut-out width required for product installation is 36" (91.4 cm). However, if the product is placed against an extended wall and the ability to remove the crisper pans is desired, an additional 18" (45.7 cm) of cabinet width is required, so a total cabinet opening width of 54" (137.2 cm) is recommended.

To ensure proper ventilation for your refrigerator, allow for 1/2" (1.25 cm) space on each side and at the top. When installing your refrigerator next to a fixed wall, leave 2" (5.08 cm) minimum on each side (depending on your model) to allow for the door to swing open. If your refrigerator has a water dispenser and ice maker, allow extra space at the back for the water line connections.

NOTE: Do not install the refrigerator near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 55°F (13°C).