

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

GR2SHWXV


Electrical: A 115-Volt, 60-Hz, AC-only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water line with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).


PRODUCT DIMENSIONS

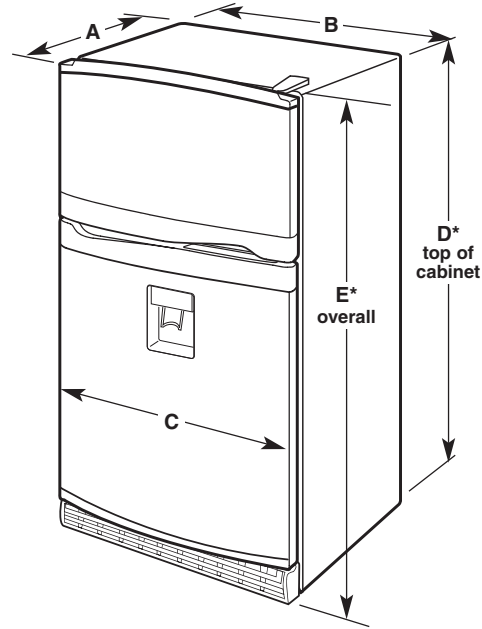

*includes rollers extended 3/4"

Model size	Depth "A"	Cab. Width "B"	Door Width "C"	Cab. Height "D*"	Overall Height "E*"
22 cu.ft.	32-1/4" (82 cm)	32-1/2" (82.6 cm)	33-1/8" (84.1 cm)	65-1/2" (166.4 cm)	66-1/2" (169 cm)

LOCATION REQUIREMENTS

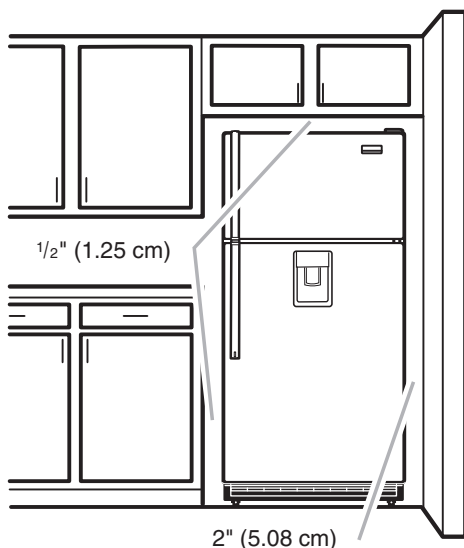

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. When installing your refrigerator next to a fixed wall, leave 2" (5.08 cm) minimum on the hinge side (some models require more) to allow for the door to swing open. If your refrigerator has an ice maker, allow extra space at the back for the water line connections.

NOTE: It is recommended that you do not install the refrigerator near an oven, radiator, or other heat source. Do not install the refrigerator in a location where the temperature will fall below 55°F (13°C).