

# TEMPEST I wall

A streamlined under-cabinet pro-style range hood, Tempest I combines power, efficiency and flexibility. 650-CFM or optional 1200-CFM blower options and high-airflow baffle filters (that are dishwasher-safe) ensure a lifetime of exceptional performance. Additional options like a wireless remote control and recirculation kits for kitchens that require ductless venting ensure all you have to think about is cooking.

	INTERNAL BLOWER STANDARD	ACT™ INTERNAL BLOWER with AIRFLOW CONTROL TECHNOLOGY™		
Single Blower (Included), Min.-Max. CFM	200 - 650	Min.-Max. CFM	200 - 390	200 - 290
Single Blower (Included), Min.-Max. Sones	1 - 6	Min.-Max. Sones	1 - 4	1 - 3
*Dual Blower (Optional), Min.-Max. CFM	400 - 1,200			
*Dual Blower (Optional), Min.-Max. Sones	2 - 9			


*ACT™ is a feature built into Tempest I hoods with single internal blowers allowing you to limit the maximum blower CFM to meet local code requirements.*

*\*Dual blower only compatible with 36" and 42" models*




Optional Remote Control


<b>SIZE</b>	
AK700BS	30"
AK7036BS	36"
AK7042BS	42"
<b>PERFORMANCE</b>	
(INCLUDED) SINGLE INTERNAL BLOWER CFM	200 - 650
MIN.-MAX. SONES	1 - 6
(OPTIONAL) DUAL INTERNAL BLOWER CFM (AVAILABLE FOR AK7036BS/AK7042BS)	400 - 1,200
MIN.-MAX. SONES	2 - 9
<b>COLOR</b>	
STAINLESS STEEL	SS
<b>FEATURES</b>	
ACT™	Yes
CONTROLS	Electronic Touch
SPEED LEVELS	6*
AUTO DELAY-OFF	Yes
CLEAN AIR MODE	Yes
LIGHTING	Halogen, 35W x 2
DUAL LEVEL LIGHTING	Yes
FILTERS	
AK700BS	SS Pro-Baffle x 2
AK7036BS/AK7042BS	SS Pro-Baffle x 3
WIRELESS REMOTE CONTROL OPTION	Yes
DUAL INTERNAL BLOWER OPTION	Yes
RECIRCULATING OPTION**	Yes, Single Blower Only
<b>DUCT SPECIFICATIONS</b>	
SINGLE INTERNAL BLOWER - VERTICAL	8" Round
SINGLE INTERNAL BLOWER - HORIZONTAL†	3-1/4" x 10" or 8" Round
DUAL INTERNAL BLOWER - VERTICAL	10" Round
DUAL INTERNAL BLOWER - HORIZONTAL	NA
<b>AC POWER</b>	
SINGLE INTERNAL BLOWER	120V, 60Hz at Max. 4A
DUAL INTERNAL BLOWER	120V, 60Hz at Max. 7.4A
<b>OPTIONAL ACCESSORIES</b>	
WIRELESS REMOTE CONTROL	14000005
DUAL INTERNAL BLOWER KIT	PBD-1200A
RECIRCULATING KIT**	
AK700BS	ZRC-7000B
AK7036BS	ZRC-7036B
AK7042BS	ZRC-7042B
BACKSPLASH WITH SHELVES	
AK700BS	AK0710
AK7036BS	AK0716
AK7042BS	AK0712
MAKE-UP AIR KIT, SINGLE BLOWER	MUA008A
MAKE-UP AIR KIT, DUAL BLOWER	MUA010A
<b>MOUNTING HEIGHT††</b>	
	26" - 36"
<b>WARRANTY</b>	
	3 Years Parts, 1 Year Labor

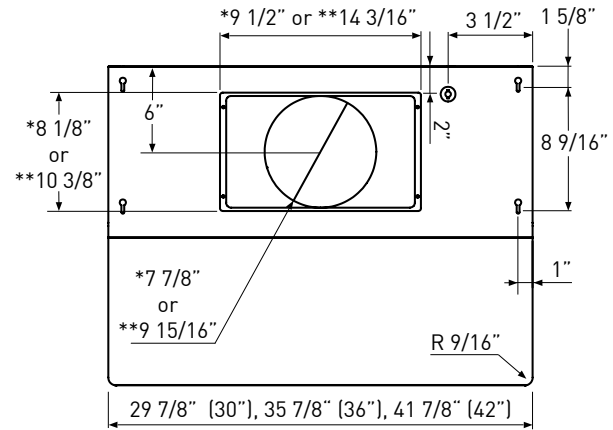

TOP

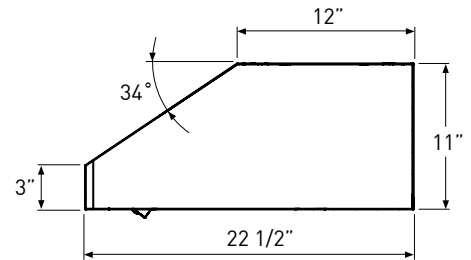

SIDE

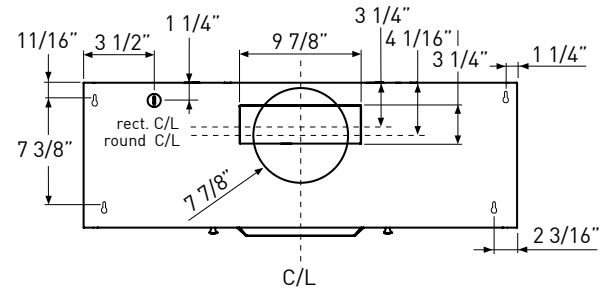

C/L

BACK

\* Single Blower Dimension  
\*\* Dual Blower Dimension

Specifications subject to change, check zephyronline.com for up-to-date information.

\*When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 3 speeds and ACT 290 CFM = 2 speeds.

\*\*Recirculating kit includes a return-air box which adds an additional 4" to the hood height. Recirculating kit is only compatible with single blower.

†If horizontally ducting via 3-1/4" x 10", the maximum airflow of 650 CFM will be reduced to 550 CFM.

††Mounting height refers to distance between top of cooking surface and bottom of hood.

