

TEMPEST II wall

Designed with professional-grade performance and seamless contours, the wall-mount Tempest II gives you serious cooking power, with 650-CFM or 1200-CFM blower options. Equipped with dishwasher-safe, high-airflow baffle filters, an optional wireless remote control, 6-speeds, and dual-level halogen lighting, it's everything the demanding cook could ask for.


	INTERNAL BLOWER STANDARD	ACT™ INTERNAL BLOWER with AIRFLOW CONTROL TECHNOLOGY™	
Single Blower (Included), Min.-Max. CFM	200 - 650	Min.-Max. CFM	200 - 390 200 - 290
Single Blower (Included), Min.-Max. Sones	1 - 6	Min.-Max. Sones	1 - 4 1 - 3
Dual Blower (Optional), Min.-Max. CFM	400 - 1,200		
Dual Blower (Optional), Min.-Max. Sones	2 - 9		

ACT™ is a feature built into Tempest II hoods with single internal blowers allowing you to limit the maximum blower CFM to meet local code requirements.




Optional Remote Control


SIZE	
AK7500BS	30"
AK7536BS	36"
AK7548BS	48"
PERFORMANCE	
(INCLUDED) SINGLE INTERNAL BLOWER CFM	200 - 650
MIN.-MAX. SONES	1 - 6
(OPTIONAL) DUAL INTERNAL BLOWER CFM	400 - 1,200
MIN.-MAX. SONES	2 - 9
COLOR	
STAINLESS STEEL	SS
FEATURES	
CONTROLS	Electronic Touch
SPEED LEVELS	6*
AUTO DELAY-OFF	Yes
CLEAN AIR MODE	Yes
LIGHTING	
AK7500BS/AK7536BS	Halogen, 35W x 2
AK7548BS	Halogen, 35W x 4
DUAL LEVEL LIGHTING	Yes
FILTERS	
AK7500BS	SS Pro-Baffle x 2
AK7536BS	SS Pro-Baffle x 3
AK7548BS	SS Pro-Baffle x 4
WIRELESS REMOTE CONTROL OPTION	Yes
DUAL INTERNAL BLOWER OPTION	Yes
RECIRCULATING OPTION**	
AK7500BS/AK7536BS	Yes, Single Blower Only
AK7548BS	NA
DUCT SPECIFICATIONS	
SINGLE INTERNAL BLOWER - VERTICAL	8" Round
SINGLE INTERNAL BLOWER - HORIZONTAL†	3-1/4" x 10" or 8" Round
DUAL INTERNAL BLOWER - VERTICAL	10" Round
DUAL INTERNAL BLOWER - HORIZONTAL	10" Round
AC POWER	
SINGLE INTERNAL BLOWER	
AK7500BS/AK7536BS	120V, 60Hz at Max. 4A
AK7548BS	120V, 60Hz at Max. 4.6A
DUAL INTERNAL BLOWER	
AK7500BS/AK7536BS	120V, 60Hz at Max. 7.4A
AK7548BS	120V, 60Hz at Max. 8A
OPTIONAL ACCESSORIES	
12" DUCT COVER	
AK7500BS	AK0720
AK7536BS	AK0726
AK7548BS	AK0728
WIRELESS REMOTE CONTROL	14000005
DUAL INTERNAL BLOWER KIT	PBD-1200A
RECIRCULATING KIT**	
AK7500BS	ZRC-7000B
AK7536BS	ZRC-7036B
AK7548BS	NA
BACKSPLASH WITH SHELVES	
AK7500BS	AK0710
AK7536BS	AK0716
AK7548BS	AK0712
MAKE-UP AIR KIT, SINGLE BLOWER	MUA008A
MAKE-UP AIR KIT, DUAL BLOWER	MUA010A
MOUNTING HEIGHT**	
	26" - 36"
WARRANTY	
	3 Years Parts, 1 Year Labor

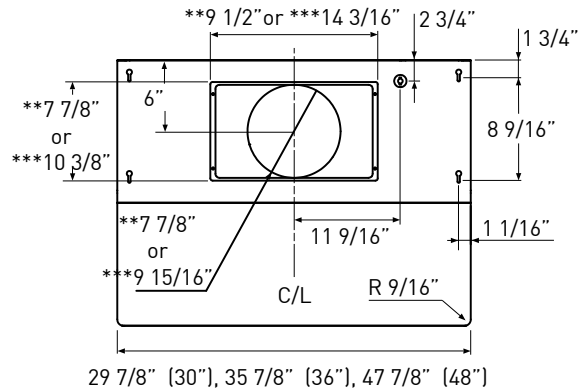

TOP

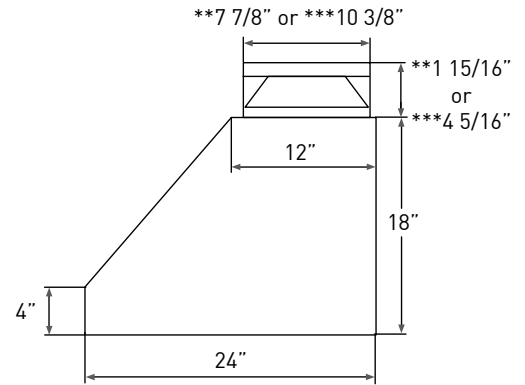

SIDE

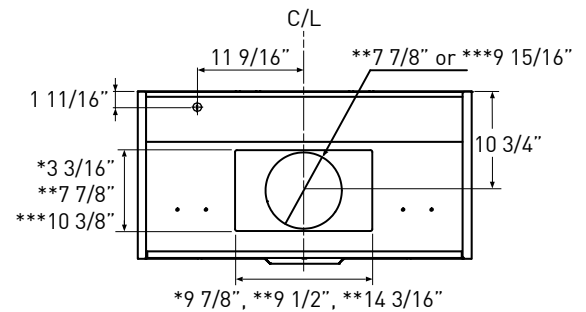

BACK

* Single Blower Rect. Ducting Dimension
** Single Blower Round Ducting Dimension
*** Dual Blower Dimension

Specifications subject to change, check zephyronline.com for up-to-date information.

*When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 3 speeds and ACT 290 CFM = 2 speeds.

**Recirculating kit includes a return-air box which adds an additional 4" to the hood height. Recirculating kit is only compatible with single blower.

†If horizontally ducting via 3-1/4" x 10", the maximum airflow of 650 CFM will be reduced to 550 CFM.

**Mounting height refers to distance between top of cooking surface and bottom of hood.