



The Ispira Series offers bold modern design featuring eight striking colors of interchangeable glass panels.

Heat Sentry™ mode that automatically adjusts ventilation to avoid overheating.

Delay-off function for each speed (automatic shut-off after 5 minutes).


Blue or white LED backlighting.

Four blower speeds for all your cooking needs.

Choice of standard white, grey and black glass colors or interchangeable optional color panels to help you personalize your kitchen décor.

#### Model Numbers:

30"–UCB3130SBB	UCB3130SBS	UCB3130SBW	UCB3130SBN
36"–UCB3136SBB	UCB3136SBS	UCB3136SBW	UCB3136SBN
Black	Grey	White	No Glass



Four-speed soft touch controls sit behind white, grey, black or optional glass panels to match appliance finishes or complement your kitchen décor.



PURLED™ light system boosts light output, distributes light better and improves energy efficiency.



Hybrid baffle filters provide ultra-efficient grease removal with superior air flow.

#### Glass panels sold separately



Emerald, Lime, Orange, Purple, Red

#### Hood Sizes

<b>Widths</b>	<b>30", 36"</b>
<b>Depths</b>	<b>20-1/8"</b>

#### Finish

Stocked	Brushed Stainless Steel (Grade 430) with white, black or grey glass
Special Order	Not Available

#### Features

Lighting Type	PURLED™, 5.5 watts each, 1100 Lumens, 3000K
Number of Lamps	2
Lighting Levels	3
Lighting Lamps Included	Yes
Control Type	4-speed Soft Touch
Control Features	Heat Sentry™, Delay-off
Remote Control	Not Available
Filter Type	Hybrid Baffle
Non-ducted Capability	No

#### Hood Blower Included

<b>Internal</b>	
Max Blower CFM*	550
Sones Normal Setting**	1.0

\*MAX Blower CFM indicates the performance of the hood blower in open air.


\*\*Normal setting corresponds to speed 1.

#### Installation Requirements

Amps @ 120V	1.8
Electrical Connection	Plug In
Duct Size: Internal Blower	3-1/4" x 10"
Duct Direction	V or H
Backdraft Damper	Included

#### Accessories

Glass Panels	White, Grey, Black, Emerald, Lime, Orange, Purple, Red
--------------	--

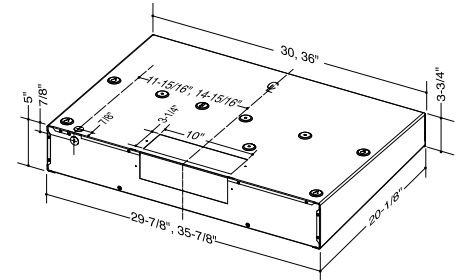

Installation height above the cooking surface: 24"–30"

For more details or HVI rated performance for this model see the product specifications sheet found at [www.BESTRangeHoods.com](http://www.BESTRangeHoods.com)



If needed, ask a recommended installer to limit discharge to 300 CFM.



**Performance is a beautiful thing.**

It can be subtle or bold. It can take months or years to hone.  
Then impress you in an instant.

A great performance gives the audience exactly what they want and more than they ever imagined. And it inspires everyone and everything around it to be better.

At **BEST**, we make high performance range hoods that perform beautifully. Astonishingly quiet. Impressively effective. Remarkably efficient. And perfectly suited for the most distinguished kitchens.

Whether it's the centerpiece of the room or letting its surroundings shine, **BEST** is where high-end performance inspires.

**best**<sup>®</sup>

**PERFORMANCE THAT INSPIRES**