



# 48" WALL CHIMNEY HOOD

DHW482



## GENERAL PROPERTIES

FINISH	STAINLESS STEEL
--------	-----------------

## OPTIONAL ACCESSORIES

RECIRCULATION KIT	AVDH2
-------------------	-------

## NUMBER OF MOTORS

(2) DOUBLE BLOWER	1200 CFM
-------------------	----------

## TECHNICAL INFORMATION

CIRCUIT REQUIREMENTS	120VAC, 15AMP, GROUNDED DEDICATED, 3-WIRE CIRCUIT
----------------------	---

TOTAL CONNECTED LOAD	120VAC/60HZ
----------------------	-------------

MAX CURRENT DRAW	6.8 AMPS
------------------	----------

SHIPPING WEIGHT	88LBS
-----------------	-------

## PRODUCT DIMENSIONS


WALL DIMENSIONS (H X W X D) (IN.)	30 1/4"-42" X 48" X 24"
-----------------------------------	-------------------------

## FEATURES & BENEFITS

- 8" diameter exhaust. Can accommodate up to a 10" duct.
- Squirrel cage style blower. 4 blower speeds.
- Auto off setting after 4 hours.
- Blue illuminated electronic control panel.
- 10 minute Timer (motor runs for 10 minutes and then automatically shuts off).
- 20 watt halogen lights (can be used w/ 10, 20, or 30w bulbs)
- Easy-to-clean Baffle Filter System, dishwasher safe.
- Hood can be installed to exhaust through the ceiling or rear wall

## DHW MODEL

Tolerances: ±1/16" (±1.6 mm), -0 unless otherwise stated

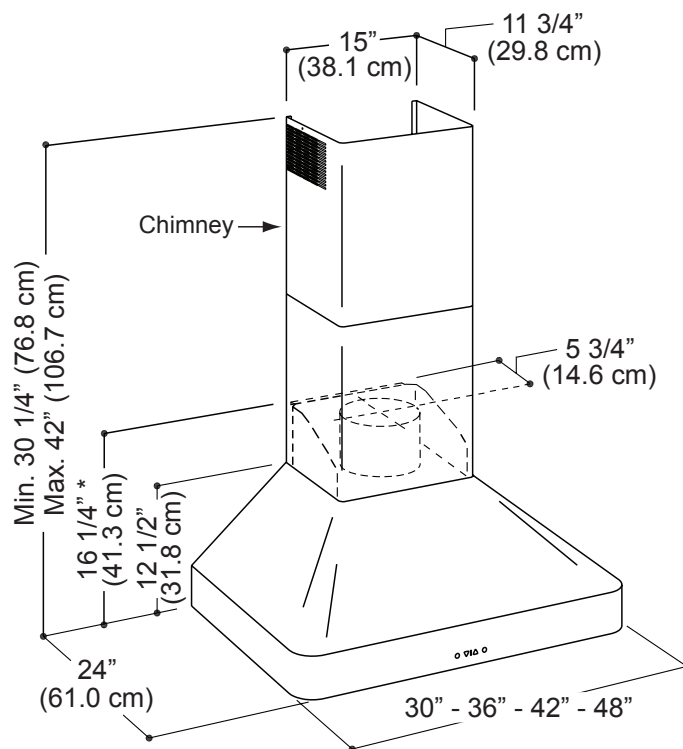

\*\*Warranty: Limited, parts and labor for one year