








Selected Model		
Model number	BSC27SB	
Avantgarde Collection		
Series	Noire	
Dimensions		
Width (in.)	15"	
Depth (in.)	23 ¼"	
Height (in.)	34"	
Exterior Appearence		
Cabinet	Black	
Color Appearance	Vitrified black glass	
Flush with cabinet	Yes	
Glass Door	Tinted and UV treated Glass	
Handle Type	Tubular	
Installation Type	Freestanding or Built-In	
Kick Plate	Stainless Steel	
Capacity		
Total Capacity	27 Bottles	
Features		
Temperature zone(s)	1	
Adjustable Temperature	4°-18° C	
Adjustable Temperature Built-in	4°-18° C Yes	
Adjustable Temperature Built-in Configuration	4°-18° C Yes Single Door	
Adjustable Temperature Built-in Configuration Control Type	4°-18° C Yes	
Adjustable Temperature Built-in Configuration Control Type Door opening orientation	4°-18° C Yes Single Door Soft touch electronic control Reversible	
Adjustable Temperature Built-in Configuration Control Type Door opening orientation Interior lighting	4°-18° C Yes Single Door Soft touch electronic control Reversible White LED	
Adjustable Temperature Built-in Configuration Control Type Door opening orientation Interior lighting Leveling legs	4°-18° C Yes Single Door Soft touch electronic control Reversible White LED Yes	
Adjustable Temperature Built-in Configuration Control Type Door opening orientation Interior lighting Leveling legs Shelves extension	4°-18° C Yes Single Door Soft touch electronic control Reversible White LED Yes Full Extension on Ball Bearings	
Adjustable Temperature Built-in Configuration Control Type Door opening orientation Interior lighting Leveling legs Shelves extension Shelves type	4°-18° C Yes Single Door Soft touch electronic control Reversible White LED Yes Full Extension on Ball Bearings Metal shelves   Wooden frontage	
Adjustable Temperature Built-in Configuration Control Type Door opening orientation Interior lighting Leveling legs Shelves extension Shelves type  Electrical	4°-18° C Yes Single Door Soft touch electronic control Reversible White LED Yes Full Extension on Ball Bearings Metal shelves   Wooden frontage	
Adjustable Temperature Built-in Configuration Control Type Door opening orientation Interior lighting Leveling legs Shelves extension Shelves type  Electrical I Volts; Hertz; Amps	4°-18° C Yes Single Door Soft touch electronic control Reversible White LED Yes Full Extension on Ball Bearings Metal shelves   Wooden frontage Requirements 120V / 60 Hz / 15 amp	
Adjustable Temperature Built-in Configuration Control Type Door opening orientation Interior lighting Leveling legs Shelves extension Shelves type  Electrical I Volts; Hertz; Amps	4°-18° C Yes Single Door Soft touch electronic control Reversible White LED Yes Full Extension on Ball Bearings Metal shelves   Wooden frontage Requirements 120V / 60 Hz / 15 amp	
Adjustable Temperature Built-in Configuration Control Type Door opening orientation Interior lighting Leveling legs Shelves extension Shelves type  Electrical Volts; Hertz; Amps  Accessorie Square shape Stainless steel handle kit	4°-18° C Yes Single Door Soft touch electronic control Reversible White LED Yes Full Extension on Ball Bearings Metal shelves   Wooden frontage Requirements 120V / 60 Hz / 15 amp es (optionnal) DG14-1176	
Adjustable Temperature Built-in Configuration Control Type Door opening orientation Interior lighting Leveling legs Shelves extension Shelves type  Electrical I Volts; Hertz; Amps  Accessori Square shape Stainless steel handle kit Wa	4°-18° C Yes Single Door Soft touch electronic control Reversible White LED Yes Full Extension on Ball Bearings Metal shelves   Wooden frontage Requirements 120V / 60 Hz / 15 amp es (optionnal) DG14-1176 rranty	
Adjustable Temperature Built-in Configuration Control Type Door opening orientation Interior lighting Leveling legs Shelves extension Shelves type  Electrical Volts; Hertz; Amps  Accessorie Square shape Stainless steel handle kit	4°-18° C Yes Single Door Soft touch electronic control Reversible White LED Yes Full Extension on Ball Bearings Metal shelves   Wooden frontage Requirements 120V / 60 Hz / 15 amp es (optionnal) DG14-1176 rranty Entire appliance; parts and labour, in-home	
Adjustable Temperature Built-in Configuration Control Type Door opening orientation Interior lighting Leveling legs Shelves extension Shelves type  Electrical I Volts; Hertz; Amps  Accessori Square shape Stainless steel handle kit Wa	4°-18° C Yes Single Door Soft touch electronic control Reversible White LED Yes Full Extension on Ball Bearings Metal shelves   Wooden frontage Requirements 120V / 60 Hz / 15 amp es (optionnal) DG14-1176 rranty	








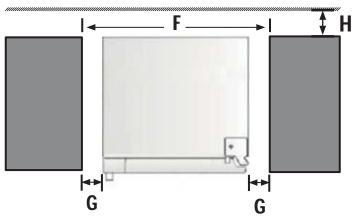

	Product dimensions	ро
Α	Overall height of produt	34
В	Overall width of product	15
С	Depth (excludes door)	21 7/8
D	Depth (including doors without handles)	23 1/4
Ε	Overall depth (including handles and doors)	25
	Cabinetry cutout	
F	Width - Installation flush door	15 1/4
	Minimum Clearances	
G	Side clearance - Flush with door - Full door rotation	1/8
Н	Rear clearance	1



## **Electrical Planning**



- A 660 mm (min. 24")
- B 387 mm (15 1/4")
- C 883 mm (34¾′′)
- D 152 mm (6")
- E 51 mm (2")
  25 mm (1") if electrical outlet is in adjacent cabinetry