





CONTROLS AND FUNCTIONS

Control Soft touch with LCD display

Lighting 2 bulbs, 3W LED

Power 600 CFM, 3-speeds and speed

Sound level Speed 1, 0.3 sones

Speed 3, 7.0 sones

Filter Type 3 aluminium micro hole filters and stainless steel baffle filters

Duct transition 6" round top

 $3 \frac{1}{4}$ " x 10" rear and top

Power-off

Delay Timer

Clean Filter

Reminder

Yes

Yes

SPECIFICATIONS AND DIMENSIONS

Dimensions $35 \frac{1}{2}$ (W) x $19 \frac{3}{4}$ (D) x 6 (H)

Stainless steel 201

grade

Electrical 120

120V / 60Hz / 2.7A


requirements


Warranty 1-year parts and labour

UPC code 628173080119



DIMENSIONS

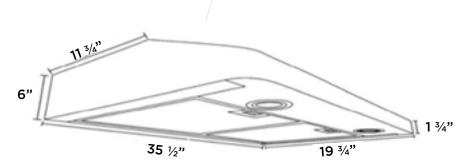




DUCT TRANSITION

6" round top $3 \frac{1}{4}$ " x 10" rear and top





INSTALLATION



Α	Floor to ceiling height	VARIABLE
В	Floor to counter top height (standard)	36"
С	Recommended height between cooking surface and bottom of the hood	28" to 30"
D	Hood height	6"