



#### **CONTROLS** AND FUNCTIONS

Control Electronic soft touch on front and

rear of hood with LCD display

Lighting 4 bulbs, 2W LED

Power 900 CFM, 6-speeds and speed

Sound level Speed 1, 0.3 sones

Speed 6, 7.0 sones 3 aluminium micro hole filters

**Duct transition** 6" and 8" round top

Included, up to 9'0" ceilings Chimney

Power-off Yes

**Delay Timer** 

Filter Type

Clean Filter

Yes

Reminder

# **SPECIFICATIONS AND DIMENSIONS**

35 ½" (W) x 23 ½" (D) x 3 ½" (H) **Dimensions** 

Stainless steel 201

grade

**Electrical** requirements Accessories

(optional)

120V / 60Hz / 2.7A

AD-860S2 (Chimney extension, 860mm high,


> replaces the upper portion of the standard chimney)

Warranty 1-year parts and labour

**UPC** code 628173080201



### **DIMENSIONS**

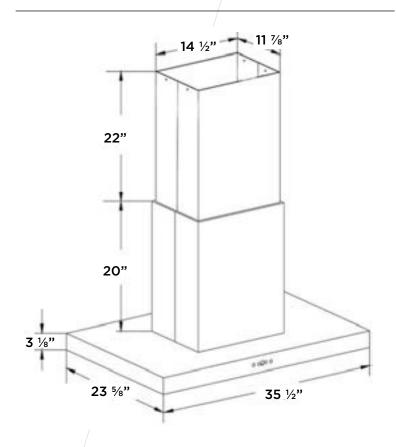


# **DUCT TRANSITION**

6" and 8" round top



### INSTALLATION



Α	Floor to ceiling height	VARIABLE
В	Floor to counter top height (standard)	36"
С	Recommended height between cooking surface and bottom of the hood	28" to 30"
D	Hood height	3 1/8"
E	Chimney height (standard)	20" to 42"