AVO-308CS3 30" WALL MOUNT HOOD







CONTROLS AND FUNCTIONS

Control	Soft touch with LCD screen	
Lighting	2 bulbs, 3W LED	
Power and speed	860 CFM, 6-speeds	
Sound level	Speed 1, 1.5 sones Speed 6, 5.0 sones	
Filter Type	2 Stainless steel baffle filters	
Duct transition	6" and 8" round top 3 ¼" x 10" top and rear	
Chimney	Included, up to 9'0" ceilings	
Power-off Delay Timer	Yes	
Clean Filter Reminder	Yes	


SPECIFICATIONS AND DIMENSIONS

Dimensions	29 ½" (W) x 19 ¾" (D) x 10 ¾" (H)
Stainless steel grade	201
Electrical requirements	120V / 60Hz / 2.7A
Accessories (optional)	AD-780-SS (Chimney extension, 780 mm high, replaces the upper portion of the standard chimney)
Warranty UPC code	1-year parts and labour 628173080270

AVO-308CS3 30" WALL MOUNT HOOD



DIMENSIONS

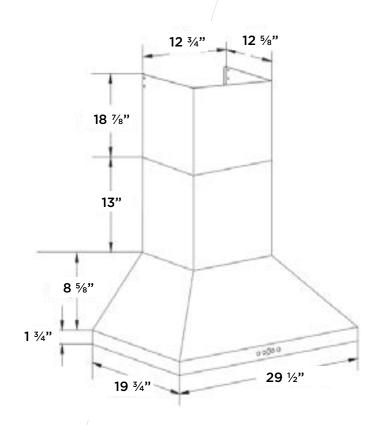


DUCT TRANSITION


6" and 8" round top



3 1/4" x 10" top & back



INSTALLATION



A	Floor to ceiling height	VARIABLE
E	Floor to counter top height (standard)	36"
c	Recommended height between cooking surface and bottom of the hood	28" to 30"
C	Hood height	10 3⁄8"
E	Chimney height (standard)	13" to 31 ¾"