





CONTROLS AND FUNCTIONS

Control Soft touch with LCD display

Lighting 2 bulbs, 3W LED

Power and 900 CFM, 4-speeds

Power and speed

Sound level Speed 1, 1.5 sones

Speed 1, 1.5 sones Speed 4, 7.5 sones

Filter Type 3 Stainless steel baffle filters

Duct transition 8" round top

Power-off Delay Timer Yes

Clean Filter Reminder

Yes

SPECIFICATIONS AND DIMENSIONS

Dimensions 35 ½6" (W) x 22" (D) x 9 ½6" (H)

Stainless steel 201

grade

Electrical requirements

120V / 60Hz / 2.7A

Warranty


1-year parts and labour

UPC code 628

628173080324




DIMENSIONS

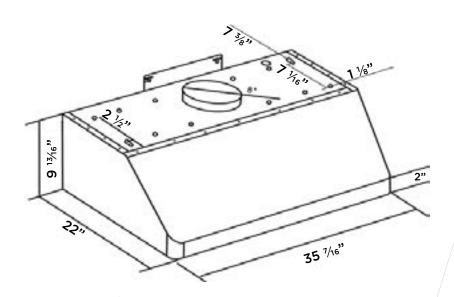


DUCT TRANSITION

8" round top



INSTALLATION



Α	Floor to ceiling height	VARIABLE
В	Floor to counter top height (standard)	36"
С	Recommended height between cooking surface and bottom of the hood	26" to 30"
D	Hood height	9 13/16"