



CONTROLS AND FUNCTIONS

Control Soft touch with LCD display

Lighting 2 bulbs, 3W LED

Power and 860 CFM, 6-speeds speed

Sound level Speed 1, 2.4 sones Speed 6, 6.2 sones

Filter Type 3 aluminium micro hole

filters and 3 stainless steel

baffle filters

Duct transition 6" and 8" round top

Chimney Included, up to 9'0" ceilings

Power-off **Delay Timer**

Yes

Clean Filter

Yes

Reminder

SPECIFICATIONS AND DIMENSIONS

Dimensions 35 ½"(W) x 19 ¾"(D) x 2 ¾"(H)

Stainless steel 201

grade

Electrical requirements

Accessories

(optional)

120V / 60Hz / 2.7A

AD-800S2 (Chimney extension, 800 mm high, replaces the

upper portion


of the standard chimney)

Warranty 1-year parts and labour

UPC code 628173080348



DIMENSIONS

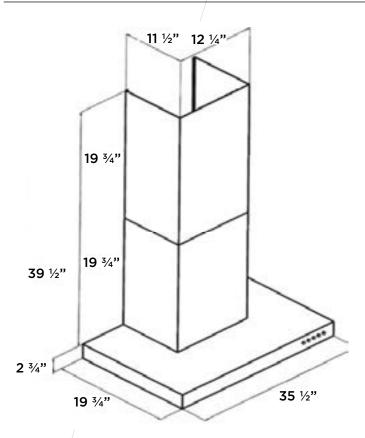


DUCT TRANSITION

6" and 8" round top



INSTALLATION



Α	Floor to ceiling height	VARIABLE
В	Floor to counter top height (standard)	36"
С	Recommended height between cooking surface and bottom of the hood	28" to 30"
D	Hood height	2 3/4"
E	Chimney height (standard)	19 ¾" to 39 ½"