



PRODUCT DIMENSIONS

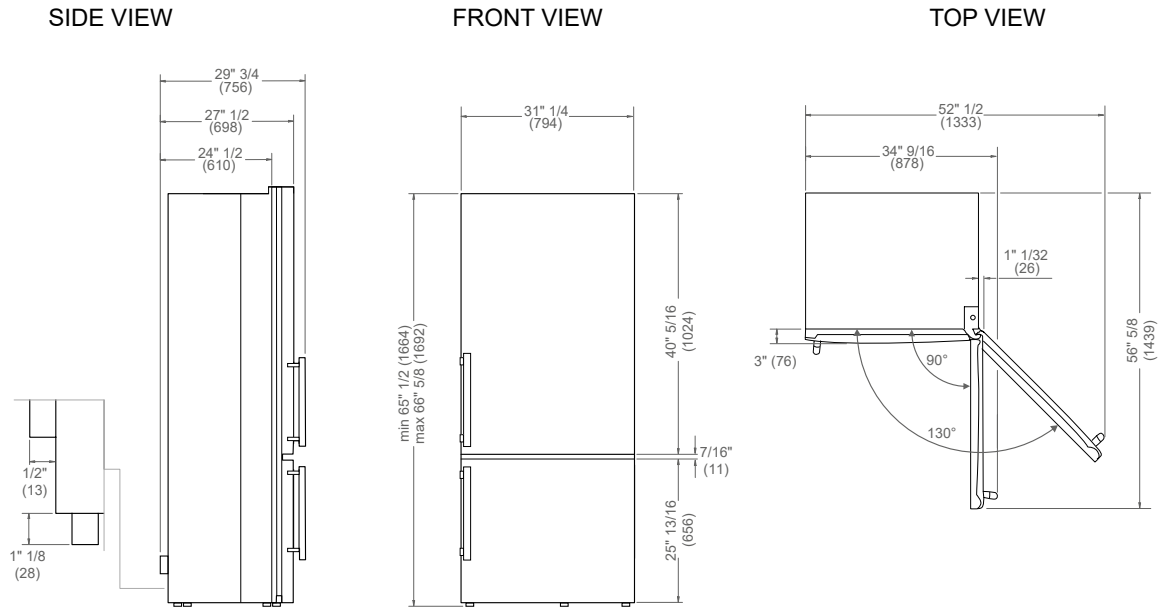

CUTOUT DIMENSIONS (Counter-depth Installation)

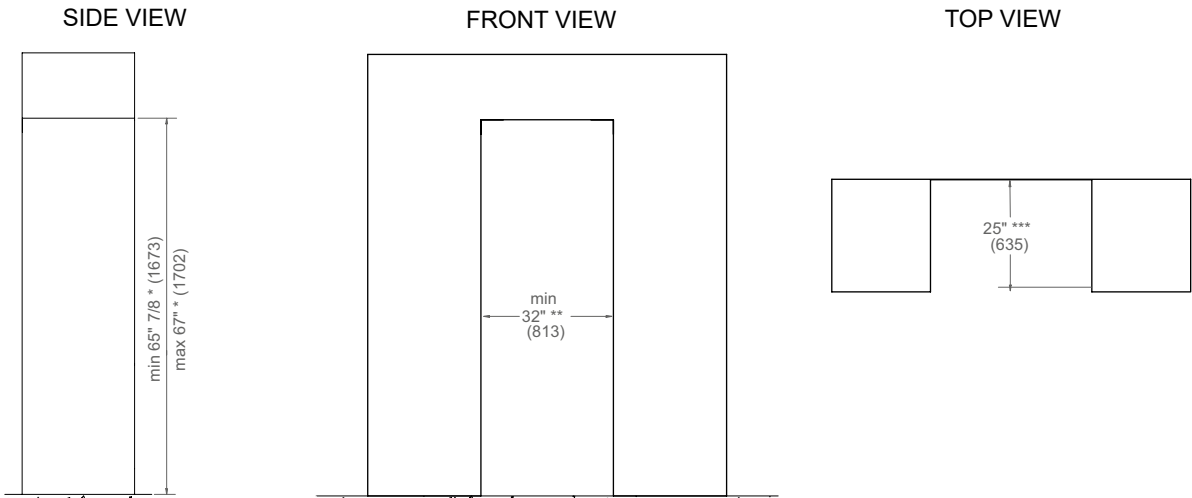


* dimension with a minimum clearance of 3/8" (9,5 mm) on the top

** dimension with a minimum clearance of 3/8" (9,5 mm) on both sides

*** dimension with a minimum clearance of 2" (50 mm) on the back


ELECTRICAL AND WATER CONNECTIONS




A properly-grounded, horizontally-mounted electrical receptacle should be installed according to this drawing.

To connect to the water supply system, a 1/4" NPT waterline with an accessible shutoff valve, a water supply installation kit and a 1/4" compression nut should be found at a local hardware store. A 1/4" tubing and 1/4" compression nut are also needed to connect the in-line water filter included with the unit.

TOP VIEW



FRONT VIEW



Connection(s) placement within the opening may require additional cabinet depth.