BERTAZZONI PROFESSIONAL SERIES 30" SINGLE OVEN F30 PRO XE




The Bertazzoni traditions of engineering excellence, culinary expertise and Italian design come alive in the Professional Series wall ovens. The exceptional, energy-conscious performance of the Bertazzoni Professional Series wall ovens is enhanced by the intuitive and easy-to-use interface operated with ergonomic knobs and touch controls. With ten functions, seven shelf positions the new Bertazzoni wall oven is the perfect partner for the ultimate user experience in your kitchen.

LCD TOUCH INTERFACE




The intuitive interface with touch controls and knobs with a clear graphic display turns the oven into the perfect partner to your cooking skills.

DUAL DIAGONAL CONVECTION



Two large-blade fans positioned on the diagonal axis and subsidiary air vents at the top and bottom of the oven cavity provide balanced airflow and even heat distribution.



HANDLE SOLUTION



Operate the soft-motion quadrupleglass door with the ergonomic steel PRO handle.




BERTAZZONI PROFESSIONAL SERIES

30" SINGLE OVEN F30 PRO XE

FUNCTIONS



Oven type	electric convection self-clean
Oven broiler type	electric
Oven controls	hi-resolution LCD touch interface
Inner oven door	quadruple glass
Door Hinge	soft motion
Oven handle	solid metal
Oven door finishing	stainless steel
Cavity finishing	pyrolityc black enamel
Convection System	dual diagonal
Oven levels	7
Glide shelves	full extension
Wire shelves	2 heavy gauge
Tray	1 baking tray
Grill trivet for Trays	yes

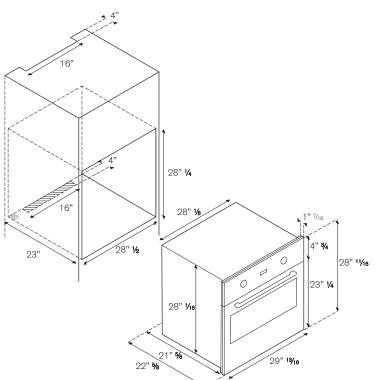

TECHNICAL SPECIFICATIONS

ACCESSORIES


30 Telescopic Slide Shelf

Voltage, frequency	120/208 Vac - 120/240 Vac, 60 Hz
Oven volume	4.1 ft ³
Max Amp usage, power rating	30 A - 5500 W
Certification	CSA
Warranty	2 years parts and labor

code TG

INSTALLATION INSTRUCTIONS

Bertazzoni recommends to operate the appliance after it has been installed in a cabinet. The kitchen cabinets shall be made of materials capable of withstanding temperatures at least 117°F (65°C) above room temperature in order to avoid possible damage to the cabinets during oven usage. The appliance must be installed into cabinetry and be supported from underneath. The air intake opening at the bottom of the door must be left unobstructed. For a flush mount installation the surrounding cabinets doors should have the same thickness as the oven control panel (13/16" for all PRO models). For installation of the oven in column please refer to the drawings view of model MO 30 STANE. For under counter installation refer to the cooktop or rangetop installation drawing in the specific sections of this document.

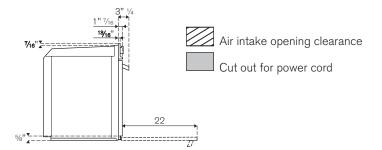

Disclaimer: while every effort has been made to insure the accuracy of the information contained in this brochure, Fratelli Bertazzoni reserves the right to change any part of the information at any time without notice.

Fratelli Bertazzoni, Bertazzoni and the winged wheel brand icon are registered trademarks of Bertazzoni Spa.