

---

# BERTAZZONI PROFESSIONAL SERIES

## 36" RANGE TOP CB36 6 00 X



The Bertazzoni 36" range top brings professional performance and surface cooking convenience together in an elegant solution. Available in this 6 burners configuration, Bertazzoni Pro gas cooktops have the same one-piece, seamless, high-efficiency worktop design that has become the signature of Bertazzoni freestanding ranges. All burners are in cast brass for enhanced performance, with the dual control brass power burner delivering best-in-class heat-up times and maximum flexibility thanks to its wide BTU range.

### BRASS POWER BURNER



Bertazzoni's exclusive dual control power burner in cast brass delivers high-efficiency performance from a delicate low simmer to full power (750 – 18,000 BTUs) with best-in-class heat-up time.





TO COOK BEAUTIFULLY

## BERTAZZONI PROFESSIONAL SERIES

### 36" RANGE TOP CB36 6 00 X

#### FEATURES

<b>Brass burners</b>	6
<b>Dual wok (1x)</b>	750-18000 Btu/h
<b>Rapid (1x)</b>	11000 Btu/h
<b>Semi-rapid (3x)</b>	6200 Btu/h
<b>Auxiliary (1x)</b>	750-3400 Btu/h

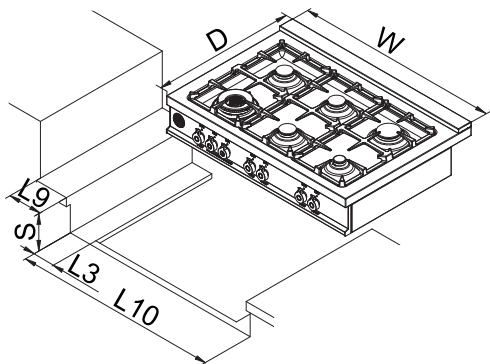

#### TECHNICAL SPECIFICATIONS

<b>Electrical Requirements</b>	120V 60Hz
<b>Max. Amp Usage</b>	1 Amp
<b>Certification</b>	CSA
<b>Warranty</b>	2 years parts and labor
<b>Product weight</b>	81.6 lbs
<b>Box weight</b>	83.0 lbs

#### ACCESSORIES

<b>Simmer ring (standard)</b>	code 408077
<b>Stainless steel griddle (optional)</b>	code SG36X
<b>Wok ring (standard)</b>	code 408084

#### DIMENSIONS

Ref.	Description	Dimensions	
		Inches	mm
<b>D</b>	Cooktop depth	25 <sup>3</sup> / <sub>16</sub>	640
<b>G1</b>	Distance between gas outlet connection and frontal side	23 <sup>1</sup> / <sub>4</sub>	590
<b>G5</b>	Distance between gas outlet connection and left side	3	76
<b>L3 (min)</b>	Cutout clearance from backwall	1	25
<b>L9 (min)</b>	Cutout clearance from cabinetry	6	152
<b>L10</b>	Cutout width	36	915
<b>S</b>	Cooktop height	6 <sup>1</sup> / <sub>2</sub>	165
<b>S4</b>	Chassis height	4 <sup>15</sup> / <sub>16</sub>	125
<b>W</b>	Cooktop width	35 <sup>15</sup> / <sub>16</sub>	910
<b>Z5</b>	Adjustable horizontal exit	3 <sup>15</sup> / <sub>16</sub>	100

#### INSTALLATION INSTRUCTIONS

Bertazzoni recommends to operate the appliance after it has been installed in a cabinet.

The kitchen cabinets shall be made of materials capable of withstanding temperatures at least 117°F (65°C) above room temperature in order to avoid possible damage to the cabinets during appliance usage.