

The new PK22 features the IQ Blower System™ with the first and only true system calibration in the world.

New

# PK22

Power Pack with exclusive IQ Blower System™ has best-in-class performance

HVI-certified 1100 CFM performance.

Exclusive IQ Blower System, with digital motor design and Guaranteed Performance System Technology runs up to 2x quieter, clears smoke and odors up to 30% faster, and is up to 22X more energy efficient than other blowers in its class.

Guaranteed Performance System technology is the first and only true calibration system that delivers up to 30% more airflow in typical applications than competitive hoods.

Distinctive hybrid stainless steel baffle and aluminum mesh filter enables greater airflow and quieter operation than typical baffle filters.

Heat Sentry™ detects excessive heat and adjusts blower speed to high automatically.

Delay-off shuts down range hood after 10 minutes.



### Hood Sizes

**Width** 27-3/4": PK2230, 36-1/2": PK2239, PKEX2239  
43-7/16": PK2245, PKEX2245

**Depth** 15-7/16"

### Finish

Stocked Brushed Standard Grade Stainless Steel  
Special Order Not Available

### Features

**Light Type** Halogen 50W, GU10  
**Number of Lamps** 2 on PK2230 and PK2239/PKEX2239;  
3 on PK2245/PKEX2245  
**Lighting Levels** 3  
**Lighting Lamps Included** Yes  
**Control Type** 4-Speed, Electronic Push-button with LED Digital Display  
**Control Features** Heat Sentry™  
**Control Remote** Optional ACR1  
**Filter** Hybrid Aluminum mesh/Stainless Steel baffle  
**Non-ducted Capability** No

### Blower Options (Internal PK22; External PKEX22—choose one)

**Internal Blower (included)** IQ1200 (Dual IQ Blower)  
**Sones Normal/High** 0.6/11.5 (PK2230)  
0.6/11.5 (PK2239)  
0.6/11.0 (PK2245)



### External In-line (sold separately)

	ILB3	ILB6	ILB9	ILB11
Vertical or straight through CFM	280	600	800	1100
Horizontal or right angle CFM	260	600	700	1000

Some levels are typically half of comparable CFM internal blowers.

### External Exterior (sold separately)

	EB6	EB9	EB12	EB15
Vertical CFM	600	900	1200	1500



Some levels are typically half of comparable CFM internal blowers.

### Accessories

**Liners** Optional AL3036, AL3042, AL3948, AL3954, AL4554, AL4560  
**Light Panels** ALP36, ALP42, ALP48, ALP54, ALP60  
**Universal make-up air damper** MD6TU or MD8TU  
**Remote Control** ACR1  
**Optional Transition** 10" to 8" Reducer Model 472

### Installation Requirements

**Amps @ 120V** 8.0 for PK2230, PK2239; 8.5 for PK2245  
**Electrical** Direct Wire  
**Duct Size** 10"  
**Duct Direction** Vertical  
**Backdraft Damper** Included

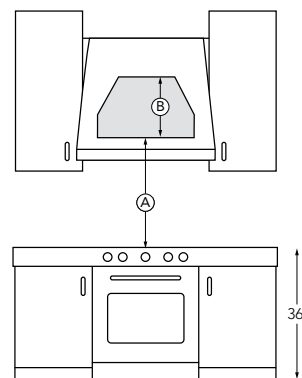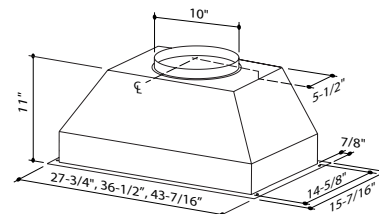

A. Installation height above the cooking surface 24–30"

B. Distance from bottom of range hood to top of hood 11"



Halogen lights provide brilliant 3-level cooktop lighting



Use the calibration button to activate GPS Technology

