

The new PK22 features the IQ Blower System™ with the first and only true system calibration in the world.

New

PK22

Power Pack with exclusive IQ Blower System™ has best-in-class performance

HVI-certified 1100 CFM performance.

Exclusive IQ Blower System, with digital motor design and Guaranteed Performance System Technology runs up to 2x quieter, clears smoke and odors up to 30% faster, and is up to 22X more energy efficient than other blowers in its class.

Guaranteed Performance System technology is the first and only true calibration system that delivers up to 30% more airflow in typical applications than competitive hoods.

Distinctive hybrid stainless steel baffle and aluminum mesh filter enables greater airflow and quieter operation than typical baffle filters.

Heat Sentry™ detects excessive heat and adjusts blower speed to high automatically.

Delay-off shuts down range hood after 10 minutes.



Hood Sizes

Width 27-3/4": PK2230, 36-1/2": PK2239, PKEX2239
43-7/16": PK2245, PKEX2245

Depth 15-7/16"

Finish

Stocked Brushed Standard Grade Stainless Steel
Special Order Not Available

Features

Light Type Halogen 50W, GU10
Number of Lamps 2 on PK2230 and PK2239/PKEX2239;
3 on PK2245/PKEX2245
Lighting Levels 3
Lighting Lamps Included Yes
Control Type 4-Speed, Electronic Push-button with LED Digital Display
Control Features Heat Sentry™
Control Remote Optional ACR1
Filter Hybrid Aluminum mesh/Stainless Steel baffle
Non-ducted Capability No

Blower Options (Internal PK22; External PKEX22—choose one)

Internal Blower (included) IQ1200 (Dual IQ Blower)
Sones Normal/High 0.6/11.5 (PK2230)
0.6/11.5 (PK2239)
0.6/11.0 (PK2245)



External In-line (sold separately)

	ILB3	ILB6	ILB9	ILB11
Vertical or straight through CFM	280	600	800	1100
Horizontal or right angle CFM	260	600	700	1000

Some levels are typically half of comparable CFM internal blowers.

External Exterior (sold separately)

	EB6	EB9	EB12	EB15
Vertical CFM	600	900	1200	1500




Some levels are typically half of comparable CFM internal blowers.

Accessories

Liners Optional AL3036, AL3042, AL3948, AL3954, AL4554, AL4560
Light Panels ALP36, ALP42, ALP48, ALP54, ALP60
Universal make-up air damper MD6TU or MD8TU
Remote Control ACR1
Optional Transition 10" to 8" Reducer Model 472

Installation Requirements

Amps @ 120V 8.0 for PK2230, PK2239; 8.5 for PK2245
Electrical Direct Wire
Duct Size 10"
Duct Direction Vertical
Backdraft Damper Included

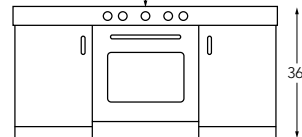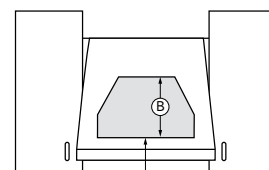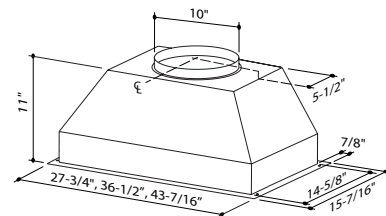

A. Installation height above the cooking surface 24–30"

B. Distance from bottom of range hood to top of hood 11"



Halogen lights provide brilliant 3-level cooktop lighting



Use the calibration button to activate GPS Technology

