



Cirrus Grande powered by the exclusive iQ Blower System with GPS Technology (see page 58) for the quietest, most energy efficient and fastest smoke and odor removal available in a range hood.

Perimeter aspiration provides superior ventilation, backed up by mesh grease filters.

Four-speed electronic light-touch controls are operated with the ACR3 remote control, included.

Four 3-watt LED light strips provide bright cooktop lighting.

Stainless Steel panels for a designer look.

10-minute delay-off and filter clean reminder provide convenient operation.

Designed to work with optional Automatic Make-Up Air Dampers.

**Model Numbers:**

CC34IQ63SB

CC34IQT63SB

CC34E63SB



Panels provide perimeter aspiration and conceal washable grease filters.



Bright, energy-efficient LED lighting.



Central control button with LED indicator ring.



Included ACR3 remote control lets the busy cook stay in control from anywhere in the kitchen.

**Hood Sizes**

<b>Width</b>	<b>63"</b>
<b>Depth</b>	<b>27-1/2"</b>
<b>Finish</b>	
Stocked	Brushed Stainless Steel (Grade 430)
Special Order	Not Available

**Features**

Lighting Type	LED
Number of Lamps	4 Light strips (9 watts each, 380 lux each, 2800-3200K)
Lighting Levels	3
Lighting Lamps Included	Yes
Control Type	4-speed Electronic Light Touch
Control Features	Delay-off, Filter Clean Reminder
Remote Control	ACR3 Included
Filter Type	Mesh Grease Filter with Perimeter Aspiration
Non-ducted Capability	Yes

**Hood Blower Included (CC34IQ63 and CC34IQT63)**

Internal	iQ6 <sup>2</sup>	iQ12
Max Blower CFM*	800	1500
Sones Normal Setting**	0.3	0.6

\*MAX Blower CFM indicates the performance of the hood blower in open air.  
 \*\*Normal setting corresponds to speed 1.

**Hood Blower Options (CC34E blowers sold separately)**

<sup>1</sup> External In-line:	ILB3	ILB6	ILB9	ILB11
Max CFM	300	675	900	1500
<sup>1</sup> External Exterior:	EB6	EB9	EB12	EB15
Max CFM	665	890	1300	1650


<sup>1</sup>Sone levels using External blowers are typically half of comparable CFM Internal blowers.

**Accessories**


Non-ducted Kit	ANKCC3463
Charcoal Replacement Filters	AFCCCE3463
Automatic MUA Damper	MD6T, MD8T, MD10T (Requires Fresh Air Inlet)
Fresh Air Inlet	641FA, 643FA, 610FA

**Installation Requirements**


Electrical Amps @ 120V	Internal: 4.0, External: 6.5
Electrical Connection	Direct
Duct Size—Internal Blower	8" and 10" for iQ12
Duct size—External Blower	10"
Duct Direction	Horizontal Vertical (External vent only)
Backdraft Damper	Included

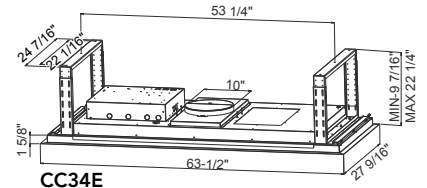

CC34E

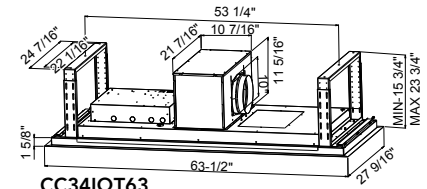

CC34IQT63

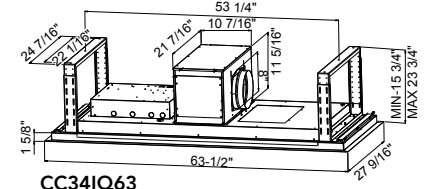

CC34IQ63

The minimum hood distance above the cooktop must not be less than 48". A maximum of 84" above the cooktop is highly recommended for best capture of cooking impurities. Distances over 84" are at the installer and user's discretion.

For more details or HVI rated performance for this model see the product specifications sheet found at [www.BESTRangeHoods.com](http://www.BESTRangeHoods.com)



<sup>2</sup>If needed, ask a recommended installer to limit discharge to 300 or 400 CFM.



**Performance is a beautiful thing.**

It can be subtle or bold. It can take months or years to hone.  
Then impress you in an instant.

A great performance gives the audience exactly what they want and more than they ever imagined. And it inspires everyone and everything around it to be better.

At **BEST**, we make high performance range hoods that perform beautifully. Astonishingly quiet. Impressively effective. Remarkably efficient. And perfectly suited for the most distinguished kitchens.

Whether it's the centerpiece of the room or letting its surroundings shine, **BEST** is where high-end performance inspires.

**best**<sup>®</sup>

**PERFORMANCE THAT INSPIRES**