


# External In-Line Blowers



BEST® In-line blowers provide exceptional performance and reduced sound levels by moving the blower mechanism away from the point of use. Durable, sealed blowers meet the rigorous needs of professional-style cook tops and ranges. The table below will help you select an in-line blower matched to the heat output of your range hood. See page 67 for more information on selecting the right blower for your range or cooking style.




| Series                                               | ILB3                                      | ILB6                                      | ILB9                                      | ILB11                                             |
|------------------------------------------------------|-------------------------------------------|-------------------------------------------|-------------------------------------------|---------------------------------------------------|
| Type                                                 | In-line                                   | In-line                                   | In-line                                   | In-line                                           |
| Max. Blower CFM                                      | 300                                       | 675                                       | 900                                       | 1500                                              |
| HVI performance (High Speed)                         | 280                                       | 600                                       | 800                                       | 1100                                              |
| Unit Dimensions <sup>3</sup> W"x D"x H"              | 12¼x12¼x11¾                               | 21½x12¼x11¾                               | 22x18x18                                  | 22x18x18                                          |
| Duct Inlet <sup>1</sup> /Outlet                      | 8" or 10" / 8" round                      | 10" / 10" Round                           | 10" / 10" Round                           | 10" / 10" Round                                   |
| Duct Direction                                       | Vert. or Hor.                             | Vert. or Hor.                             | Vert. or Hor.                             | Vert. or Hor.                                     |
| Backdraft Damper                                     | Yes                                       | Yes                                       | Yes                                       | Yes                                               |
| Amps at 120V                                         | 2.7                                       | 2.9                                       | 3.0                                       | 5.0                                               |
| Motor Type <sup>2</sup>                              | Single Speed                              | Single Speed                              | Single Speed                              | Single Speed                                      |
| Hood Compatibility <sup>1</sup> with External Blower | UP26, UP27, WP28, WP29, All EX & E models | UP26, UP27, WP28, WP29, All EX & E models | UP26, UP27, WP28, WP29, All EX & E models | UP26, UP27, WP28, WP29, WPD39M, All EX & E models |

<sup>1</sup> Most "EX" & "E" models require a transition (model 414) from 8" to 10" for use with External Blowers. BEST® blowers are designed and UL Certified for use with BEST® products only.

<sup>2</sup> All BEST® blower motors are thermal overload protected.

<sup>3</sup> For more detailed information visit [BESTRangeHoods.com](http://BESTRangeHoods.com)


BEST® ducting, roof and wall cap accessories may be found on page 64. In-line blowers may be vented through the roof or wall, with the goal of minimizing the duct length.

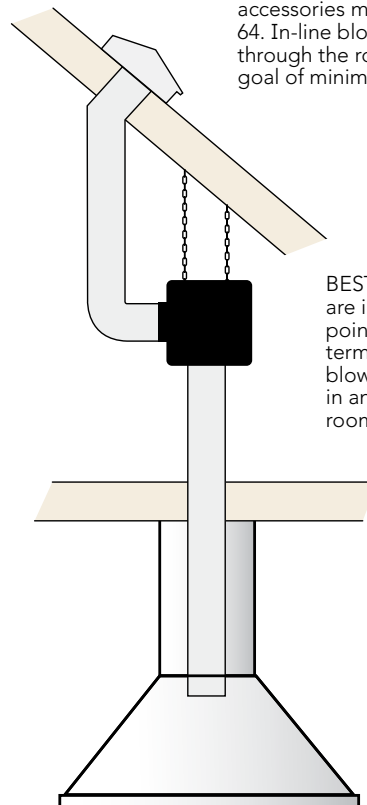

BEST® In-line blowers are installed between the point of use and the duct termination point. In-line blowers may be installed in an attic space, utility room or crawl space.

Electrical connections to both the hood and the in-line blower are required.

Suspending the in-line blower with a chain mounting kit (included) is recommended to minimize noise and vibration.

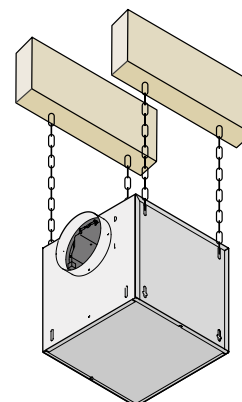

## **Performance is a beautiful thing.**

It can be subtle or bold. It can take months or years to hone.  
Then impress you in an instant.

A great performance gives the audience exactly what they want and more than they ever imagined. And it inspires everyone and everything around it to be better.

At **BEST**, we make high performance range hoods that perform beautifully. Astonishingly quiet. Impressively effective. Remarkably efficient. And perfectly suited for the most distinguished kitchens.

Whether it's the centerpiece of the room or letting its surroundings shine, **BEST** is where high-end performance inspires.



**PERFORMANCE THAT INSPIRES**