



24" Touch Control Electric Cooktop

CTE24410



FEATURES

- Slide Touch Control with Timer
- Programmable Touch Control System
- Smooth Top for Easy Cleaning
- Four Vitroceramic Cooking Zones
- Individual Heat Indicator

FINISH

Stainless Steel Frame

DIMENSIONS (H x W x D)


 $2^{5}/_{8} \times 24^{3}/_{16} \times 20^{15}/_{16}$ in.

Glass Type Glass Ceramic Size 24" Color Black Heating Technology Electric (Vitroceramic) Stainless Steel Frame Yes Control Type Touch Control ELECTRIC BURNER FEATURES Smooth Top for Easy Cleaning Programmable Touch Control System Yes Slide Touch Control with Timer Yes Residual Heat Indicator Yes STANDARD POWER Front Left Ø 3 15/16" — 650 W Hi-Light Front Right Ø 3 15/16" — 650 W Hi-Light Rear Left Ø 5 3/4" — 1,200 W Hi-Light Rear Right Ø 4 3/4" / 8 1/4" — 750 / 2,200 W Duo DIMENSIONS Required Cutout Dimension (W x D) Overall Height Q 2 13/16 x 19 5/8 in. Overall Width Q 24 3/16 in. Overall Depth Q 15/16 in. Weight POWER / RATINGS KW / Amp Rating at 240 V, 60 Hz Total Watts Amp Rating Supply Cord Yes	GENERAL	
Color Black Heating Technology Electric (Vitroceramic) Stainless Steel Frame Yes Control Type Touch Control ELECTRIC BURNER FEATURES Smooth Top for Easy Cleaning Yes Programmable Touch Control System Yes Slide Touch Control with Timer Yes Residual Heat Indicator Yes STANDARD POWER Front Left Ø 3 15/16" — 650 W Hi-Light Front Right Ø 3 15/16" — 650 W Hi-Light Rear Left Ø 5 3/4" — 1,200 W Hi-Light Rear Right Ø 4 3/4" / 8 1/4" — 750 / 2,200 W Duo DIMENSIONS Required Cutout Dimension (W x D) 22 13/16 x 19 5/16 in. Overall Height 25/16 in. Overall Width 24 3/16 in. Veright 25.8 lbs. POWER / RATINGS kW / Amp Rating at 240 V, 60 Hz 220—240 V, 60 Hz Total Watts 4,700 W Amp Rating 220 V, 21 Amp	Glass Type	Glass ceramic
Heating Technology Stainless Steel Frame Control Type Touch Control ELECTRIC BURNER FEATURES Smooth Top for Easy Cleaning Programmable Touch Control System Yes Slide Touch Control with Timer Residual Heat Indicator STANDARD POWER Front Left Ø 3 15/16" — 650 W Hi-Light Front Right Ø 3 15/16" — 650 W Hi-Light Rear Left Ø 5 3/4" — 1,200 W Hi-Light Rear Right Ø 4 3/4" / 8 1/4" — 750 / 2,200 W Duo DIMENSIONS Required Cutout Dimension (W x D) Overall Height Overall Width Overall Depth DOUGH	Size	24"
Stainless Steel Frame	Color	Black
Touch Control	Heating Technology	Electric (Vitroceramic)
Smooth Top for Easy Cleaning	Stainless Steel Frame	Yes
Smooth Top for Easy Cleaning Yes	Control Type	Touch Control
Programmable Touch Control System Yes Slide Touch Control with Timer Yes Residual Heat Indicator Yes STANDARD POWER Front Left Ø 3 15/16" — 650 W Hi-Light Front Right Ø 3 15/16" — 650 W Hi-Light Rear Left Ø 5 ¾" — 1,200 W Hi-Light Rear Right Ø 4 ¾" / 8 ¼" — 750 / 2,200 W Duo DIMENSIONS Required Cutout Dimension (W x D) 22 ¾6 x 19 ½6 in. Overall Height 2 ½6 in. Overall Width 24 ¾n6 in. Overall Depth 20 ½/6 in. Weight 25.8 lbs. POWER / RATINGS kW / Amp Rating at 240 V, 60 Hz 220 – 240 V, 60 Hz Total Watts 4,700 W Amp Rating 220 V, 21 Amp	ELECTRIC BURNER FEATURES	
Slide Touch Control with Timer Yes	Smooth Top for Easy Cleaning	Yes
STANDARD POWER	Programmable Touch Control System	Yes
## STANDARD POWER Front Left	Slide Touch Control with Timer	Yes
Front Left Ø 3 15/16" — 650 W Hi-Light Front Right Ø 3 15/16" — 650 W Hi-Light Rear Left Ø 5 3/4" — 1,200 W Hi-Light Rear Right Ø 4 3/4" / 8 3/4" — 750 / 2,200 W Duo DIMENSIONS	Residual Heat Indicator	Yes
Front Right Rear Left Rear Left Rear Right Rear Right DIMENSIONS Required Cutout Dimension (W x D) Overall Height Overall Width Overall Depth Divide In. Divide In. Depth Divide In. Divide In. Depth Divide In. Divide In.	STANDARD POWER	
Rear Left Ø 5 ¾" — 1,200 W Hi-Light Rear Right Ø 4 ¾" / 8 ¼" — 750 / 2,200 W Duo DIMENSIONS Required Cutout Dimension (W x D) 22 ¾6 x 19 ½ in. Overall Height 2 ½ in. Overall Width 24 ¾6 in. Overall Depth 20 ⅙6 in. Weight 25.8 lbs. POWER / RATINGS kW / Amp Rating at 240 V, 60 Hz 220–240 V, 60 Hz Total Watts 4,700 W Amp Rating 220 V, 21 Amp	Front Left	ø 3 15/16" — 650 W Hi-Light
Rear Right	Front Right	ø 3 15/16" — 650 W Hi-Light
DIMENSIONS Required Cutout Dimension (W x D) 22 ⁴3/16 x 19 ⁵/8 in. Overall Height 2 ⁵/8 in. Overall Width 24 ³/16 in. Overall Depth 20 ⁴5/16 in. Weight 25.8 lbs. POWER / RATINGS kW / Amp Rating at 240 V, 60 Hz 220-240 V, 60 Hz Total Watts 4,700 W Amp Rating 220 V, 21 Amp	Rear Left	ø 5 ¾" — 1,200 W Hi-Light
Required Cutout Dimension (W x D) 22 13/16 x 19 5/8 in.	Rear Right	ø 4 ¾" / 8 ¼" — 750 / 2,200 W Duo
Overall Height 2 % in. Overall Width 24 % in. Overall Depth 20 % in. Weight 25.8 lbs. POWER / RATINGS kW / Amp Rating at 240 V, 60 Hz 220-240 V, 60 Hz Total Watts 4,700 W Amp Rating 220 V, 21 Amp	DIMENSIONS	
Overall Width 24 ⅓₁₅ in. Overall Depth 20 ⁴ѕ/ҕ in. Weight 25.8 lbs. POWER / RATINGS kW / Amp Rating at 240 V, 60 Hz 220–240 V, 60 Hz Total Watts 4,700 W Amp Rating 220 V, 21 Amp	Required Cutout Dimension (W x D)	22 ¹³ / ₁₆ x 19 ⁵ / ₈ in.
Overall Depth 20 ¹5/₁6 in. Weight 25.8 lbs. POWER / RATINGS kW / Amp Rating at 240 V, 60 Hz 220-240 V, 60 Hz Total Watts 4,700 W Amp Rating 220 V, 21 Amp	Overall Height	2 5/8 in.
Weight 25.8 lbs. POWER / RATINGS kW / Amp Rating at 240 V, 60 Hz 220–240 V, 60 Hz Total Watts 4,700 W Amp Rating 220 V, 21 Amp	Overall Width	24 ³/16 in.
POWER / RATINGS kW / Amp Rating at 240 V, 60 Hz 220–240 V, 60 Hz Total Watts 4,700 W Amp Rating 220 V, 21 Amp	Overall Depth	20 ¹⁵ / ₁₆ in.
kW / Amp Rating at 240 V, 60 Hz 220–240 V, 60 Hz Total Watts 4,700 W Amp Rating 220 V, 21 Amp	Weight	25.8 lbs.
Total Watts 4,700 W Amp Rating 220 V, 21 Amp	POWER / RATINGS	
Amp Rating 220 V, 21 Amp	kW / Amp Rating at 240 V, 60 Hz	220-240 V, 60 Hz
	Total Watts	4,700 W
Supply Cord Yes	Amp Rating	220 V, 21 Amp
11.7	Supply Cord	Yes












Side — Side View



Front — Side View



Countertop Cutout

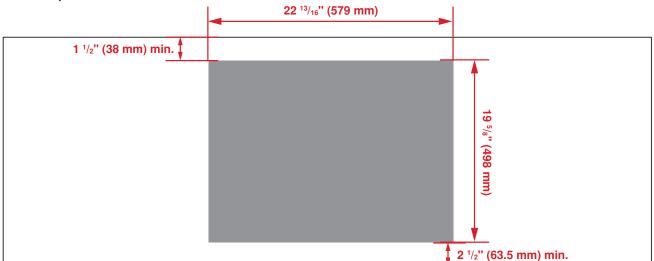

NOTE TO THE INSTALLER: All height, width, and depth dimensions are shown in inches (as well as metric). Beko U.S., Inc. reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Please visit our website at www.BlombergAppliances.com or call 888.352.2356 to verify the latest specifications with final dimensional data and other details prior to installation and making a cutout. Applicable product limited warranty information may be found in accompanying product materials, or you may contact your account manager for further details. Proper installation is the responsibility of the installer. Product failure due to improper installation is not covered under the Limited Warranty.

IN HARMONY WITH NATURE, YOUR LIFE, AND YOU

