

Introducing the new BlueStar® Built-in Refrigeration line. Featuring commercial style design and performance, our Refrigeration line offers advanced food preservation capabilities, unique features for the discerning home chef and unmatched customization options. Available Fall 2016.

PRODUCT FEATURES

- Dual compressors and evaporators for extended food preservation
- Durable 304-grade stainless steel interiors
- Extra-large capacity: 22.5 cu ft
- Professional-grade glass & metal shelves/bins
- Ramp-on LED lighting
- Precise OLED touch screen controls
- Full extension tray that fits commercial size sheet pans
- Extra-large, fully extending drawers with soft-close technology
- Adjustable and removable shelves and bins
- Automatic ice maker with Max Ice option
- Over-sized freezer that fits commercial size sheet pan
- Unmatched customization: choose from 750+ colors and finishes; 10 metal trims; and Left or Right door swings

SPECIFICATIONS

Refrigerator Dimensions: 35.75"W x 26.187"D x 83.125"H

Electrical Requirements: 115V, 60Hz, 15 AMP circuit

(Unit must be on a Non-GFI, dedicated outlet)


Water Pressure: 35-120psi

Unit Capacity: 22.5 cu ft

MODEL CONFIGURATIONS

Right Door Swing	BBB36L1
Left Door Swing	BBB36R1



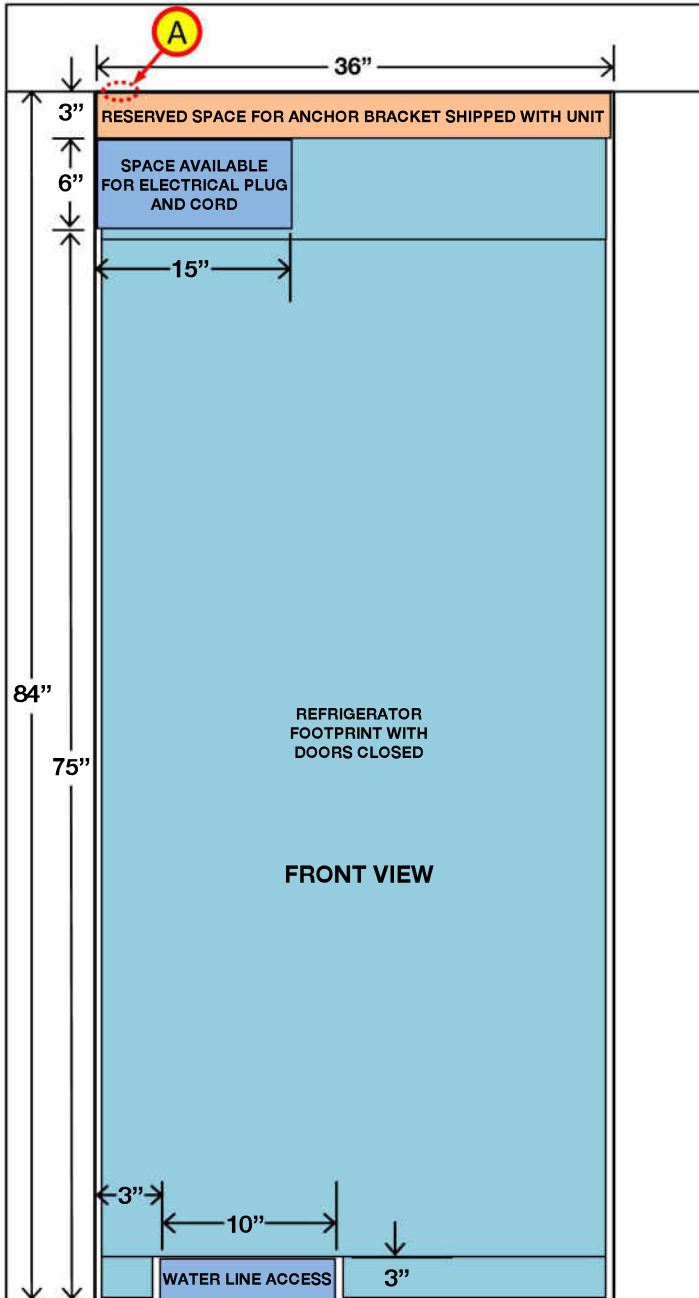

Enclosure opening needs to be 84" tall and 36" wide to accommodate the unit.

If there are plugs, cords, water lines, connectors, etc. that reside on the back wall of the enclosure, they will prevent the unit from being installed to the proper depth. Additional depth may be necessary to achieve desired appearance for how far the doors and cabinet protrude from the enclosure.

A) Power supply may be located above the enclosure as well - an access hole will need to be added to the back left corner of the ceiling of the enclosure to route the power cord through the top.

B) Depth of enclosure can be varied to suit desire appearance.

- 24" minimum which will cover the sides of the cabinet properly and will allow doors to stand proud of enclosure to achieve a more commercial, built-in look. With a 24" deep enclosure, the doors will extend beyond the front of the enclosure by 2.375".
- 26.375" minimum required to allow doors to sit flush with the front of the enclosure.
- If the enclosure is deeper than 26.375", the unit must be moved forward such that the doors are flush or proud of the enclosure. The front of the doors cannot be recessed into the opening - the upper door will not operate properly. To move the unit forward, it may be necessary to add blocking to the installation bracket at the back wall. If this performed, it is necessary to ensure that the blocking is secured to studs in the wall, or longer screws are used that reach through the installation bracket and blocking into the studs in the back wall.

