

Ventilation

HUI56551UC
36" Pull-Out Hood
500 Series - Stainless Steel



This sleek, 36" integrated pull-out hood allows you to close the hood when not in use, providing a flush-look with cabinetry

- Front stainless steel panel is replaceable with custom cabinetry panel
- 500 CFM integrated blower included & recirculation kit available for sale
- 3 speed slider control & 2 halogen lights
- For local Make-Up Air requirements, CFM reducer kit can be purchased
- Absorbs odors with Charcoal Replacement Filters (Available for sale)

Technical Data

Operating Mode :	Convertible: Ducted / Recirculating
Number of speed settings :	3-stage
Optional accessories :	HUIF06UC, HUIRED56UC
Number of lights :	2
Type of lamps used :	Halogen
Total power of the lamps (W) :	20
UPC code :	825225920533
Material :	Stainless steel
Watts (W) :	370
Volts (V) :	120
Frequency (Hz) :	60
Approval certificates :	CUL
Power cord length (in) :	50"
Power cord length (cm) :	127
Plug type :	fixed connection
Overall appliance dimensions (HxWxD) (in) :	/ x 35 7/8" x 11"
Overall appliance dimensions (HxWxD) (mm) :	x 911 x 279
Product packaging dimensions (HxWxD) (in) :	17.12 x 18.03 x 40.35
Net weight (lbs) :	38
Net weight (kg) :	17.0
Gross weight (lbs) :	43
Gross weight (kg) :	20.0
Motor location :	Integrated motor in hood body
Diameter of air duct (in) top :	6
Diameter of air duct (in) back :	6
Discharge direction :	vertical
No-return airflow flap :	No

Optional accessories

- HUIF06UC : Carbon filter
- HUIRED56UC : CFM reducer

Ventilation

HUI56551UC

36" Pull-Out Hood

500 Series - Stainless Steel

This sleek, 36" integrated pull-out hood allows you to close the hood when not in use, providing a flush-look with cabinetry

Design

- The Pull-Out Hood Visor Fully Extends During Use, and Neatly Tucks Away When not Needed
- Front Stainless Steel Visor Panel can be Replaced with the User's Own Custom Strip to Match Surrounding Cabinetry (Custom Strip Not Provided)

Performance

- 500 CFM Integrated Blower Included
- Three Speed Slider Control
- 2 Halogen Lights - 120 V, 20 Watt Max., G-4 Base
- 6 inch Round Duct at Discharge

Efficiency



- Absorbs odors with charcoal replacement filters (Separate Purchase Required)

Convenience

- Aluminum Mesh Filters are dishwasher safe for ease of cleaning
- Converts to Recirculation Mode with Accessory Kit (Separate Purchase Required)
- For areas with Make-Up Air Requirements, our CFM Reducer Kit reduces the CFM to under 300 (Separate Purchase Required)

Ventilation

HUI56551UC 36" Pull-Out Hood 500 Series - Stainless Steel

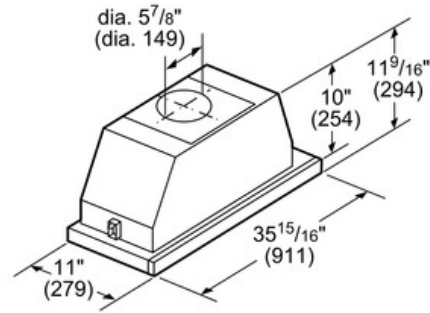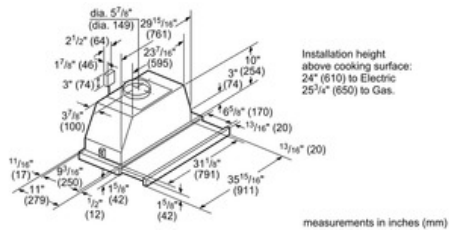

measurements in inches (mm)

