


Ventilation

36" Downdraft Downdraft Ventilation - Stainless Steel DHD3614UC

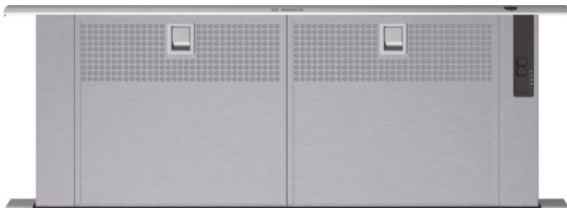

Technical Data

Operating Mode :	Convertible: Ducted / Recirculating
Number of speed settings :	3-stage
Required accessories :	Blower
Optional accessories :	DHDRM36UC, DHZDHR6, EXTNCB25
Grease filter material :	Washable aluminium
Grease filter type :	Multilayer cassette
UPC code :	825225865803
Material :	Stainless steel
Current (A) :	10
Volts (V) :	120
Frequency (Hz) :	60
Approval certificates :	CSA, UL
Power cord length (cm) :	150
Plug type :	120V-3 prong
Overall appliance dimensions (HxWxD) (in) :	
	21 5/8 " / x 37 " x 3 3/4
Overall appliance dimensions (HxWxD) (mm) :	
	550 MM x 940 x 95
Product packaging dimensions (HxWxD) (in) :	
	7.48 x 38.58 x 27.16
Vertical rise height :	13"
Net weight (lbs) :	42
Net weight (kg) :	19.0
Gross weight (lbs) :	47
Gross weight (kg) :	21.0
Motor location :	External motor
Diameter of air duct (in) back :	10
No-return airflow flap :	No

Optional accessories

- DHDRM36UC : Downdraft Recirculation Module
- DHZDHR6 : Transition to 6" round
- EXTNCB25 : 25' Blower Connection Cable

Ventilation

36" Downdraft Downdraft Ventilation - Stainless Steel DHD3614UC

Key Features

- 600 CFM Blower Options are sold separately (No blower is included)
- Stands Over 13" Tall
- Lowers Out of Sight When Not in Use
- Recirculation Option Available

Design

- Stands Over 13" Tall
- Full Face Mesh Filters
- Wall or Island Installations

Performance

- 600 CFM Blower Options are sold separately (No blower is included)
- Three Power Levels
- Quickly and Quietly Clears the Air of Smoke and Odor

Convenience

- Lowers Out of Sight When Not in Use
- Intake Area Captures Smoke, Odor, and Grease
- Dishwasher-safe Mesh Filters
- Recirculation Option Available
- Use with an Integrated, Remote or Inline Blower
- Duct Blower Left, Right, or Straight Down

Ventilation

36" Downdraft Downdraft Ventilation - Stainless Steel DHD3614UC

